




Features

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 24' depending on output
- Available with plenum rated wire leads or with integral junction box for splice connection
- Continuous Lens may be ordered separately for multi-fixture runs to create an even, seamless appearance
- Mounting hardware is included with the fixture
- 5 Year warranty
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Dot free even illumination with frosted lens
- High Color Quality options offer premium quality and vibrant colors with R9 values up to 97
- High Efficacy options offer best in class output and efficacy with over 1490 lm/ft and up to 105 lm/W

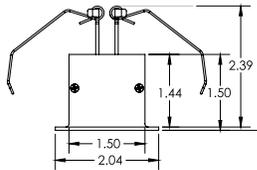

Finish Options (see page 2 for additional information)

- Silver Anodized
- White
- Aged Brass
- Black
- Matte Black
- Polished Gold
- Bronze
- Warm Nickel
- Chrome



Technical Information

MODEL	High Color Quality			High Efficacy				High Efficacy
OUTPUT OPTIONS	2x 72SO	2x 72HO	2x 72VHO	2x HE48LO	2x HE48SO	2x HE48MO	2x HE48HO	2x HE64VHO
Lumens Output (3000K) <small>(with a Frosted Lens)</small>	408 lm/ft	663 lm/ft	806 lm/ft	397 lm/ft	550 lm/ft	735 lm/ft	1179 lm/ft	1492 lm/ft
Average Power Consumption <small>(for a 4' section)</small>	5.6 W/ft	9.6 W/ft	12 W/ft	3.8 W/ft	5.6 W/ft	7 W/ft	13 W/ft	15 W/ft
Efficacy	73 lm/W	69 lm/W	67 lm/W	104 lm/W	98 lm/W	105 lm/W	91 lm/W	99 lm/W
Max Run Length <small>(in series)</small>	20 ft	16 ft	11 ft	24 ft	21 ft	17 ft	12 ft	8 ft
Max Ambient Temperature*	50°C [122°F]			50°C [122°F]				50°C [122°F]

*Max Ambient Temperature to maintain L70 of 50k+ hours. Exceeding Max Ambient Temperature may result in decreased life/output. Consult Technical Support for specific inquiries.

High Color Quality (72)

CCT	Multiplier <small>(reference - 3000K)</small>	TM-30			
		CRI	R _f	R _g	R ₉
1900K	0.55	96	94	97	90
2200K	0.70	96	95	101	89
2400K	0.72	98	97	101	91
2700K	0.74	97	96	101	91
3000K	1.00	97	95	104	97
3500K	1.02	97	94	105	97
4100K	1.07	97	90	99	97

High Efficacy (HE48/HE64)

CCT	Multiplier <small>(reference - 3000K)</small>	TM-30			
		CRI	R _f	R _g	R ₉
2200K	0.73	92	91	97	42
2500K	0.81	93	96	96	62
2700K	0.94	92	90	99	58
3000K	1.00	92	89	99	57
3500K	1.02	92	89	99	60
4000K	1.02	92	86	94	71

Ordering Code

MODEL	LENGTH ¹	OUTPUT ²	CCT	LENS ³	FINISH ⁴	LEFT END	RIGHT END	POSITION TYPE	POWER FEED
KR - Kilo Recessed	12"-144" 1" increments	72SO - Standard 72HO - High 72VHO - Very High	19K - 1900K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted C - Clear N - No Lens	SA - Silver Anodized BK - Black BZ - Bronze WH - White MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold ⁵ CH - Chrome ⁵	LE - With End Cap no Hole LN - Without End Cap	RE - With End Cap no Hole RN - Without End Cap	B - Back JB - Integrated junction box	1 - 72" wire leads
	12"-144" 2" increments	HE48LO - Low HE48SO - Standard HE48MO - Medium HE48HO - High HE64VHO - Very High	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K						







1 - Custom lengths and increments are available, please consult Inside Sales with specific request.
 2 - All High Efficacy options can be used to comply with Title 24 JAB. High Color Quality options can be used to comply with Title 24 JAB depending on Output, CCT, and lens selections, see multiplier charts to calculate specific efficacies.
 3 - Continuous Lens may be ordered separately for multi-fixture runs to create an even, seamless appearance.
 4 - Non SA finishes have extended lead times. Custom RALs are available, please consult Inside Sales for specific request.
 5 - Polished Gold finishes have a maximum fixture length of 48", and Chrome finishes have a maximum fixture length of 72".

Kilo Recessed Corner Options

K-FC
Flat Corner

K-IC
Inner Corner

K-OC
Outside Corner

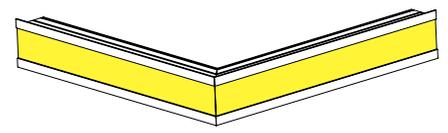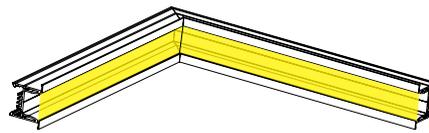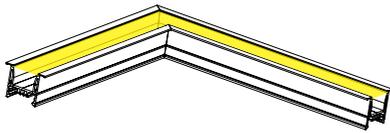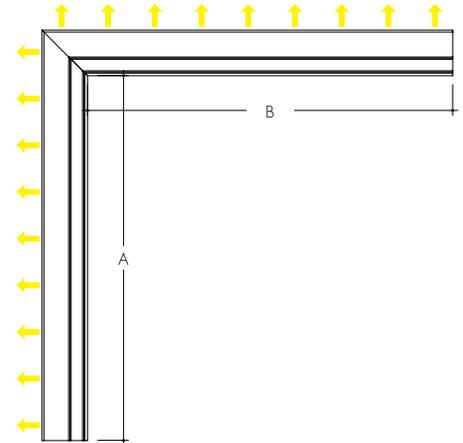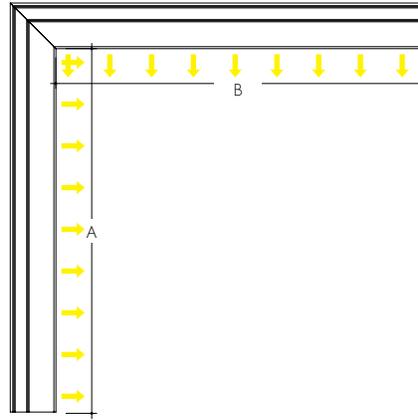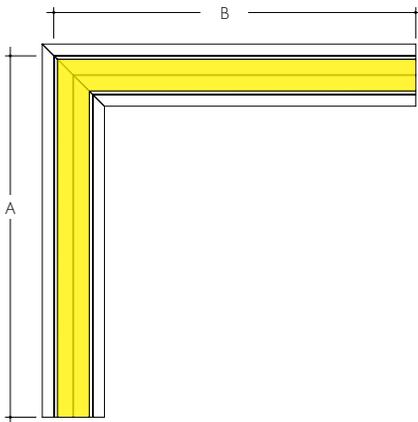

Dimensions measured for the length of recessed needed

Dimensions measured for the length of the outer (longer) length of the recessed needed

Dimensions measured for the length of recessed needed

High Color Quality	Actual Length		Total Wattage		
	A	B	72SO	72HO	72VHO
Flat (KR-FC)	12 3/16	13 4/16	10.2	17.1	22.6
Outer (KR-OC)	12 9/16	12 9/16	10.2	17.1	22.6
Inner (KR-IC)	10 13/16	10 13/16	10.2	17.1	22.6

High Efficacy	Actual Length		Total Wattage				Actual Length		Total Wattage	
	A	B	HE48LO	HE48SO	HE48MO	HE48HO	A	B	HE64SO	HE64HO
Flat (KR-FC)	12 7/16	13 8/16	6.7	10.2	12.6	23.9	12 12/16	13 13/16	29.5	37.6
Outer (KR-OC)	12 13/16	12 13/16	6.7	10.2	12.6	23.9	13 2/16	13 2/16	29.5	37.6
Inner (KR-IC)	11 1/16	11 1/16	6.7	10.2	12.6	23.9	11 6/16	11 6/16	29.5	37.6

Ordering Code

MODEL	CORNER	ANGLE	OUTPUT ²	CCT	LENS	FINISH ³	LEFT END	RIGHT END	POSITION TYPE	POWER FEED
KR - Kilo Recessed	IC - Inside Corner OC - Outside Corner FC - Flat Corner	90 - 90° C - Custom Angle Corner ¹	72SO - Standard 72HO - High 72VHO - Very High	19K - 1900K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted C - Clear N - None	SA - Silver Anodized BK - Black BZ - Bronze WH - White MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold CH - Chrome	LE - With End Cap no Hole LN - Without End Cap	RE - With End Cap no Hole RN - Without End Cap	B - Back JB - Integrated junction box	1 - 72" wire leads
			HE48LO - Low HE48SO - Standard HE48MO - Medium HE48HO - High HE64VHO - Very High	22K - 2200K 25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K						


¹ Custom Angle Corners are available, please consult Inside Sales with specific request.
² - All High Efficacy options can be used to comply with Title 24 JAB. High Color Quality options can be used to comply with Title 24 JAB depending on Output, CCT, and lens selections. See multiplier charts to calculate specific efficacies.

³ - Non SA finishes have extended lead times. Custom RALs are available, please consult Inside Sales for specific request.

Product Dimensions



KR-XX-B

Kilo Back Fed

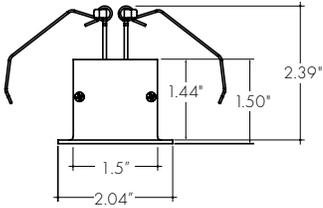

KR-XX-JB

Kilo Junction Box

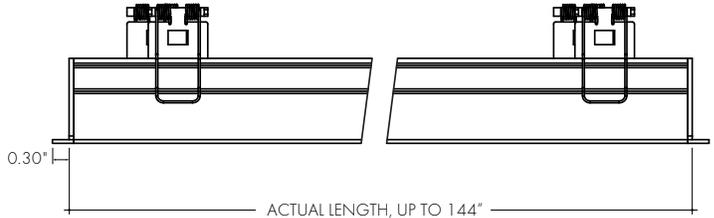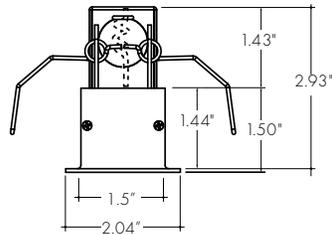

Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Silver Anodized finishes may have extended lead times.
- Polished Gold finishes have a maximum fixture length of 48", and Chrome finishes have a maximum fixture length of 72".
- Custom RALs are available, please consult Inside Sales with specific request.

Silver Anodized



Silver Anodized is a soft silver with a clear finish.

Black



Black is a true deep black with a glossy finish.

Bronze



Bronze is a rich, dark brown with a satin finish.

White



White is a polar bright white and field paintable.

Matte Black



Matte Black is a dark, pitch-black with a soft flat finish.

Warm Nickel



Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

Aged Brass



Aged Brass is a deep brown shade with slightly golden undertones.

Polished Gold



Polished Gold is bright and radiant for a brilliant finish.

Chrome



Chrome is a highly reflective silver polish.

Powerfeed options for Straight Fixtures

KR-XX-B1

Wire leads, plenum rated CL3R cable on Straight Fixture



KR-XX-JB-1


One integrated junction box centered on Straight fixture



Powerfeed options for Corner Fixtures


KR-IC-XX-B1

Wire leads, plenum rated CL3R cable on Straight Fixture

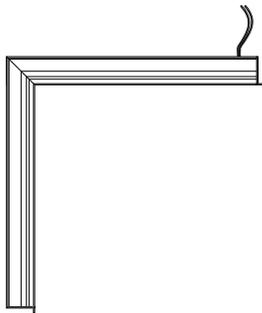


KR-IC-XX-JB-1

One integrated junction box centered on Straight fixture

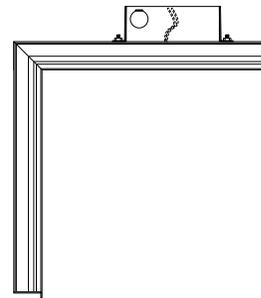

Accessories

Continuous Lens (Field Cuttable)

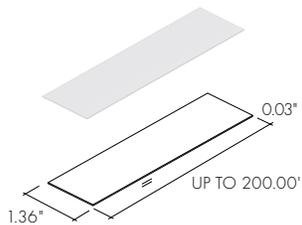

KILOC-FF - Kilo Channel Continuous Frosted Lens
KILOC-CC - Kilo Channel Continuous Clear Lens

XX - Order in 10' increments up to 200'

Lens Option / Light Transmission

Output Options	Lens/Accessory	
	Clear Lens	Frosted Lens
72SO	CD	ND
72HO	CD	ND
72VHO	CD	ND
HE48LO	CD	ND
HE48SO	CD	ND
HE48MO	CD	ND
HE48HO	CD	ND
HE64VHO	CD	ND
Transmission Percentage	114%	100%



CD SD ND

CD - Clear Dotting

SD - Slight Dotting

ND - No Dotting


Photometry

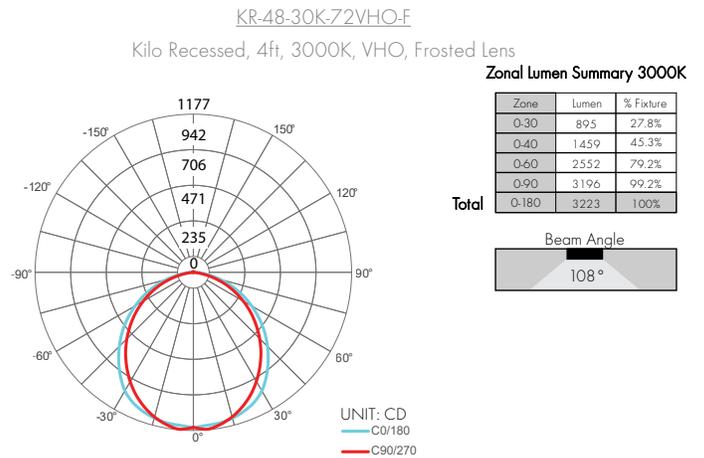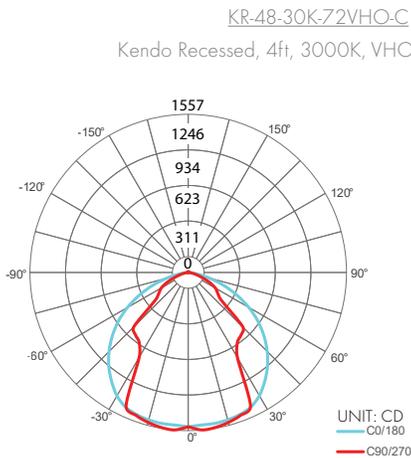

Sample Layout of Power Feed


KR-XX-B1

Kilo Recessed with back feed

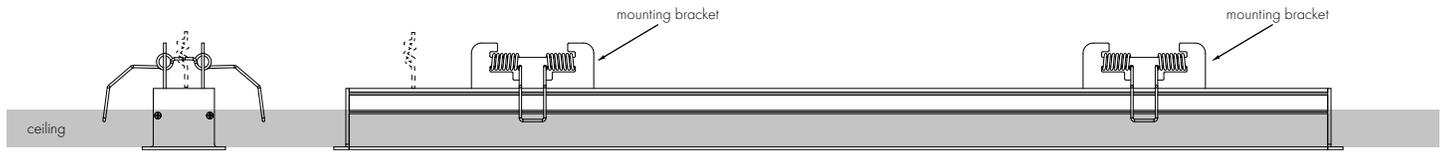


KR-XX-JB-1

Kilo Recessed with Junction Box

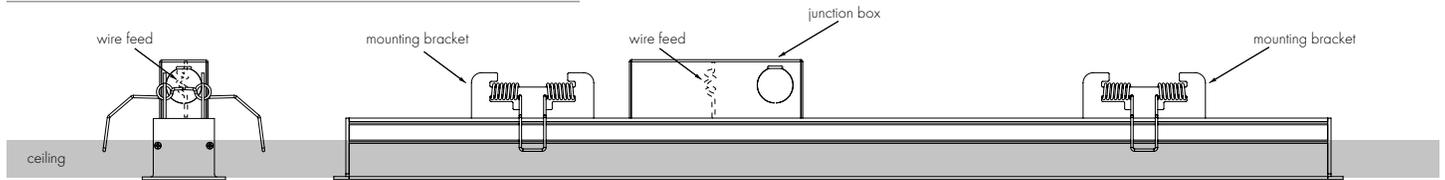



KR-XX-LE-RN-JB-1

Kilo Recessed with left endcap, without right endcap, with Junction Box

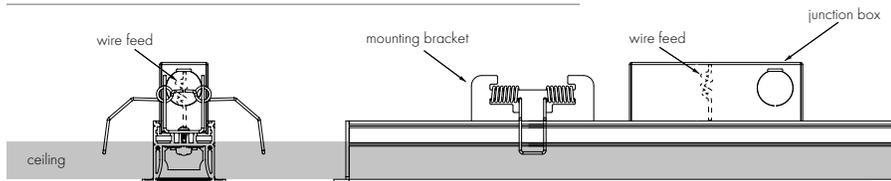


KR-XX-JB-1


Kilo Recessed without left endcap, with right endcap

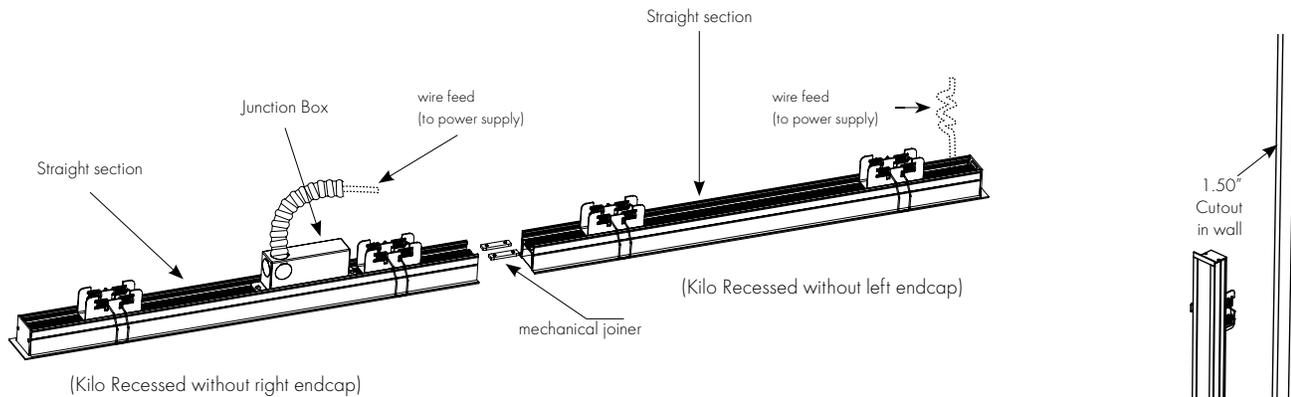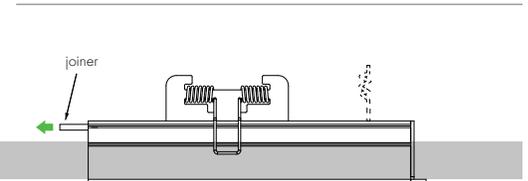

NOTE: Kilo Recessed sections are not joined electrically. Each Kilo Recessed section requires its own home run to the power supply.

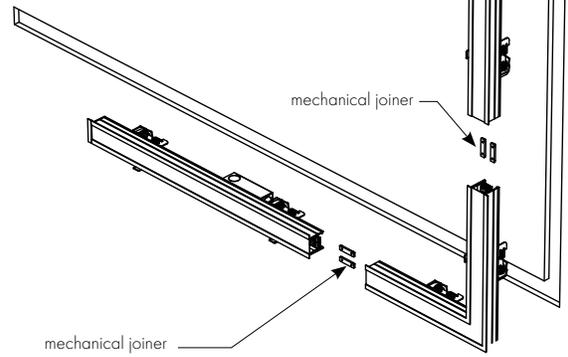

Layout Example

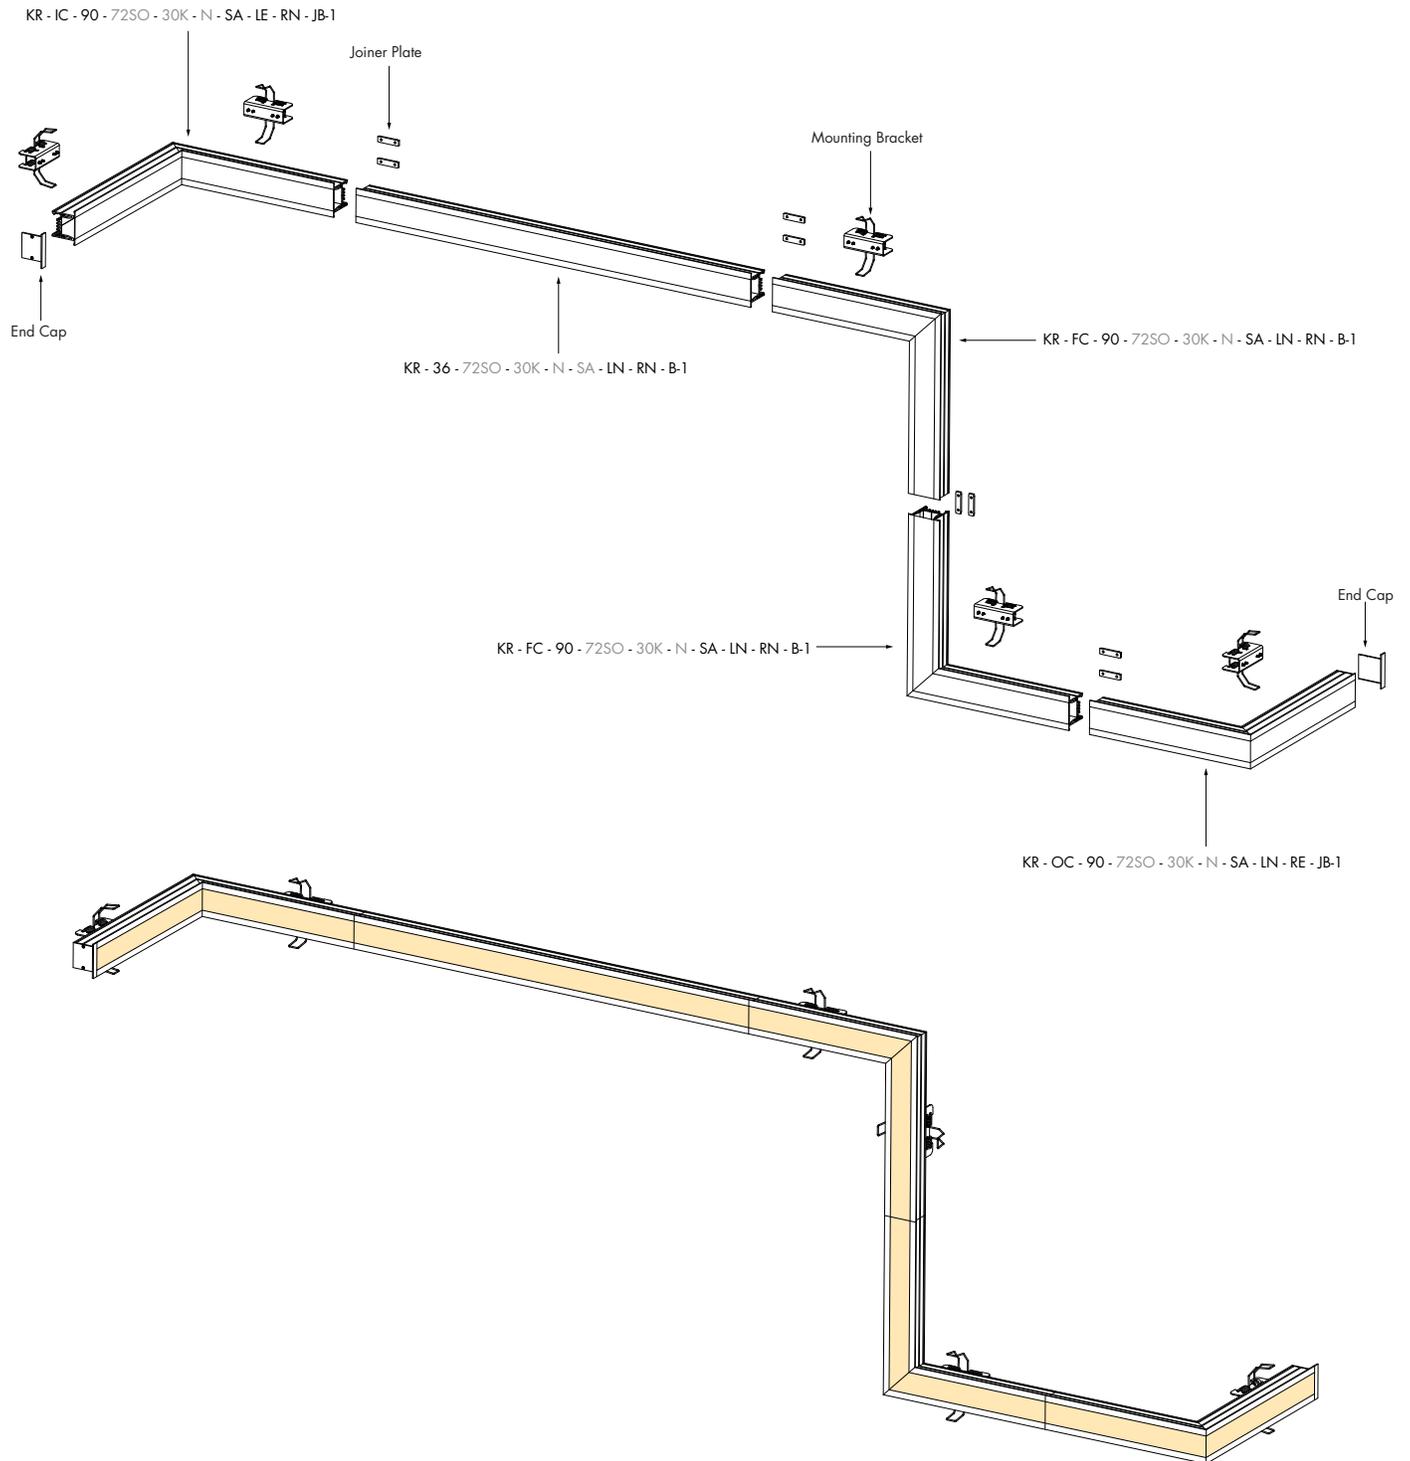

NOTE: Kilo Recessed sections are not joined electrically. Each Kilo Recessed section requires its own home run to the power supply.


Power Consumption

Tested at Full Power with PDC Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

High Color Quality (2x 72)

Nominal Length (in)	Actual Length	Watts			Nominal Length (in)	Actual Length	Watts			Nominal Length (in)	Actual Length	Watts			Nominal Length (in)	Actual Length	Watts		
		SO	HO	VHO															
12	11 5/16	5.1	8.6	11.5	47	46 1/16	20.6	32.9	42.3	82	81 15/16	34.7	53.6	68.8	117	116 11/16	47.3	70.1	88.4
13	12 7/16	5.6	9.4	12.6	48	47 3/16	21.3	33.9	43.4	83	-	-	-	-	118	117 13/16	47.7	70.6	88.8
14	13 10/16	6.2	10.5	14.1	49	48 6/16	21.8	34.6	44.2	84	83 1/16	35.2	54.4	70.7	119	119	48.0	71.0	89.3
15	14 12/16	6.7	11.2	15.0	50	49 8/16	22.2	35.2	45.0	85	84 4/16	35.5	54.9	72.0	120	-	-	-	-
16	15 15/16	7.1	12.0	16.0	51	50 11/16	22.7	36.2	46.3	86	85 6/16	35.9	55.4	72.4	121	120 2/16	48.5	71.7	90.0
17	-	-	-	-	52	51 13/16	23.1	36.8	47.1	87	86 9/16	36.5	56.1	73.1	122	121 5/16	48.7	72.2	90.4
18	17 1/16	7.8	13.1	17.4	53	53	23.5	37.4	48.0	88	87 12/16	36.9	56.6	73.5	123	122 7/16	48.9	72.6	90.8
19	18 4/16	8.2	13.8	18.4	54	-	-	-	-	89	88 14/16	37.3	57.1	74.0	124	123 10/16	49.3	73.3	91.5
20	19 6/16	8.7	14.5	19.3	55	54 2/16	24.1	38.4	49.2	90	-	-	-	-	125	124 12/16	49.5	73.8	91.9
21	20 9/16	9.3	15.6	20.7	56	55 5/16	24.5	39.0	50.0	91	90 1/16	37.7	57.6	74.4	126	125 15/16	49.7	74.3	92.3
22	21 11/16	9.8	16.4	21.7	57	56 7/16	25.0	39.6	50.8	92	91 3/16	38.3	58.4	75.3	127	-	-	-	-
23	22 14/16	10.2	17.1	22.6	58	57 10/16	25.6	40.5	52.0	93	92 6/16	38.7	59.0	76.0	128	127 1/16	50.1	74.8	93.0
24	-	-	-	-	59	58 12/16	26.1	41.1	52.8	94	93 8/16	39.1	59.7	76.7	129	128 4/16	50.4	75.1	93.5
25	24 1/16	10.7	17.8	23.5	60	59 15/16	26.5	41.7	53.6	95	94 11/16	39.8	60.6	77.7	130	129 7/16	50.7	75.4	94.1
26	25 3/16	11.4	18.9	24.9	61	-	-	-	-	96	95 13/16	40.2	61.2	78.4	131	130 9/16	51.1	75.8	94.8
27	26 6/16	11.9	19.7	25.7	62	61 1/16	27.1	42.6	54.7	97	97	40.6	61.7	78.8	132	131 12/16	51.4	76.1	95.3
28	27 8/16	12.3	20.5	26.6	63	62 4/16	27.5	43.1	55.4	98	-	-	-	-	133	132 14/16	51.6	76.4	95.8
29	28 11/16	13.1	21.6	27.8	64	63 6/16	27.9	43.7	56.1	99	98 2/16	41.1	62.3	79.2	134	-	-	-	-
30	29 13/16	13.6	22.4	28.7	65	64 9/16	28.5	44.5	57.1	100	99 5/16	41.4	62.7	79.4	135	134 1/16	51.8	76.7	-
31	31	14.0	23.1	29.6	66	65 12/16	28.9	45.0	57.8	101	100 7/16	41.7	63.0	79.6	136	135 3/16	52.1	77.1	-
32	-	-	-	-	67	66 14/16	29.3	45.5	58.4	102	101 10/16	42.2	63.6	80.0	137	136 6/16	52.2	77.4	-
33	32 2/16	14.7	24.1	31.0	68	-	-	-	-	103	102 12/16	42.6	64.0	80.4	138	137 8/16	52.4	77.7	-
34	33 5/16	15.1	24.7	31.9	69	68 1/16	29.6	45.9	59.1	104	103 15/16	43.0	64.5	81.0	139	138 11/16	52.8	78.2	-
35	34 7/16	15.5	25.4	32.8	70	69 3/16	30.2	46.5	60.0	105	-	-	-	-	140	139 13/16	53.3	78.7	-
36	35 10/16	16.2	26.3	34.2	71	70 6/16	30.5	47.0	60.6	106	105 1/16	43.6	65.3	81.9	141	141	53.8	79.1	-
37	36 12/16	16.6	26.9	35.1	72	71 8/16	30.8	47.4	61.3	107	106 4/16	44.0	65.7	82.5	142	-	-	-	-
38	37 15/16	17.1	27.6	35.9	73	72 11/16	31.4	48.1	62.1	108	107 6/16	44.4	66.2	83.1	143	142 2/16	54.5	79.7	-
39	-	-	-	-	74	73 13/16	31.8	48.8	62.5	109	108 9/16	44.9	66.9	84.0	144	143 5/16	54.9	80.2	-
40	39 1/16	17.7	28.5	37.2	75	75	32.1	49.4	62.9	110	109 12/16	45.2	67.3	84.6					
41	40 4/16	18.1	29.2	38.0	76	-	-	-	-	111	110 14/16	45.5	67.7	85.2					
42	41 6/16	18.5	29.8	38.8	77	76 2/16	32.7	50.4	63.5	112	-	-	-	-					
43	42 9/16	19.2	30.8	40.0	78	77 5/16	33.1	51.1	63.9	113	112 1/16	45.8	68.0	85.7					
44	43 12/16	19.6	31.5	40.8	79	78 7/16	33.5	51.7	64.3	114	113 3/16	46.2	68.6	86.6					
45	44 14/16	20.1	32.2	41.5	80	79 10/16	34.0	52.5	66.2	115	114 6/16	46.5	69.0	87.2					
46	-	-	-	-	81	80 12/16	34.3	53.1	67.5	116	115 8/16	46.8	69.5	87.7					

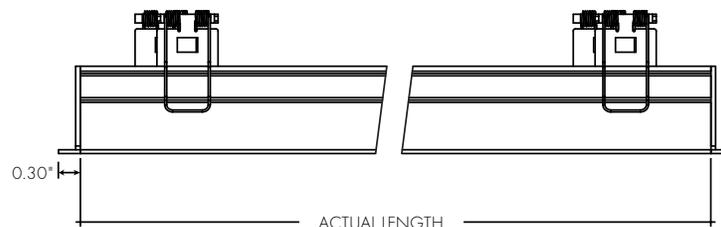


Power Consumption

Tested at Full Power with PDC Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

High Efficacy (2x HE48)

Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts			
		LO	SO	MO	HO			LO	SO	MO	HO			LO	SO	MO	HO			LO	SO	MO	HO
12	10 11/16	3.0	4.4	5.8	11.7	47	46 2/16	14.0	22.1	26.9	47.0	82	81 9/16	22.4	37.9	47.1	78.1	117	-	-	-	-	
13	12 11/16	3.7	5.4	7.0	14.7	48	-	-	-	-	83	-	-	-	-	-	118	117	34.3	54.2	66.8	90.6	
14	-	-	-	-	-	49	48 2/16	14.4	22.8	27.8	48.4	84	83 9/16	22.7	38.8	48.2	79.0	119	119	35.1	55.1	67.9	91.1
15	14 10/16	4.4	6.4	8.1	16.8	50	-	-	-	-	85	-	-	-	-	-	120	-	-	-	-	-	
16	-	-	-	-	-	51	50 1/16	15.0	23.7	29.0	50.4	86	85 8/16	23.0	39.7	49.3	79.9	121	120 15/16	35.8	56.0	69.0	91.5
17	16 10/16	5.0	7.2	9.0	18.5	52	-	-	-	-	87	-	-	-	-	-	122	-	-	-	-	-	
18	-	-	-	-	-	53	52 1/16	15.6	24.6	30.2	52.3	88	87 8/16	23.2	40.6	50.5	80.8	123	122 15/16	36.4	57.2	69.8	92.1
19	18 9/16	5.7	8.2	10.2	20.6	54	-	-	-	-	89	-	-	-	-	-	124	-	-	-	-	-	
20	-	-	-	-	-	55	54	16.1	25.5	31.3	54.2	90	89 7/16	23.4	41.5	51.6	81.6	125	124 14/16	37.0	58.3	70.6	92.6
21	20 9/16	6.2	9.2	11.4	22.3	56	56	16.7	26.4	32.5	56.1	91	-	-	-	-	-	126	-	-	-	-	-
22	-	-	-	-	-	57	-	-	-	-	92	91 7/16	23.7	42.4	52.8	82.4	127	126 14/16	37.7	59.4	71.4	93.1	
23	22 8/16	6.7	10.2	12.6	23.9	58	57 15/16	17.3	27.3	33.7	57.9	93	-	-	-	-	-	128	-	-	-	-	-
24	-	-	-	-	-	59	-	-	-	-	94	93 6/16	24.3	43.3	54.0	83.0	129	128 13/16	38.3	60.0	72.1	93.2	
25	24 8/16	7.1	11.2	13.9	25.4	60	59 15/16	17.8	28.1	34.9	59.6	95	-	-	-	-	-	130	-	-	-	-	-
26	-	-	-	-	-	61	-	-	-	-	96	95 6/16	24.9	44.3	55.3	83.6	131	130 13/16	38.9	60.7	72.8	93.3	
27	26 7/16	7.7	12.3	15.1	27.4	62	61 14/16	18.3	29.0	36.0	62.1	97	-	-	-	-	-	132	-	-	-	-	-
28	-	-	-	-	-	63	-	-	-	-	98	97 5/16	25.6	45.3	56.5	84.3	133	132 12/16	39.5	61.3	73.5	93.5	
29	28 7/16	8.4	13.5	16.4	29.5	64	63 14/16	18.6	29.9	37.2	65.4	99	-	-	-	-	-	134	-	-	-	-	-
30	-	-	-	-	-	65	-	-	-	-	100	99 5/16	26.6	46.2	57.5	84.9	135	134 12/16	40.1	62.4	74.2	93.8	
31	30 6/16	9.0	14.6	17.6	31.6	66	65 13/16	18.9	30.8	38.3	68.6	101	-	-	-	-	-	136	-	-	-	-	-
32	-	-	-	-	-	67	-	-	-	-	102	101 4/16	27.6	47.2	58.4	85.5	137	136 11/16	40.8	63.4	74.8	94.2	
33	32 6/16	9.7	15.6	18.7	33.7	68	67 13/16	19.3	31.8	39.4	70.7	103	-	-	-	-	-	138	-	-	-	-	-
34	-	-	-	-	-	69	-	-	-	-	104	103 4/16	28.5	48.1	59.4	86.2	139	138 11/16	41.4	64.4	75.4	94.5	
35	34 5/16	10.4	16.5	19.8	35.7	70	69 12/16	19.8	32.8	40.6	71.8	105	-	-	-	-	-	140	-	-	-	-	-
36	-	-	-	-	-	71	-	-	-	-	106	105 3/16	29.1	49.1	60.5	86.8	141	140 10/16	42.0	65.0	76.1	94.1	
37	36 5/16	11.0	17.4	20.8	37.7	72	71 12/16	20.2	33.9	41.7	72.8	107	-	-	-	-	-	142	-	-	-	-	-
38	-	-	-	-	-	73	-	-	-	-	108	107 3/16	29.7	50.1	61.7	87.4	143	142 10/16	42.5	65.4	76.5	93.7	
39	38 4/16	11.6	18.4	22.0	39.6	74	73 11/16	20.7	34.8	42.8	74.0	109	-	-	-	-	-	144	-	-	-	-	-
40	-	-	-	-	-	75	-	-	-	-	110	109 2/16	30.4	51.0	62.8	88.1							
41	40 4/16	12.2	19.4	23.3	41.4	76	75 11/16	21.3	35.6	44.0	75.1	111	-	-	-	-	-						
42	-	-	-	-	-	77	-	-	-	-	112	111 2/16	31.3	51.6	63.6	88.6							
43	42 3/16	12.8	20.3	24.5	43.1	78	77 10/16	21.8	36.4	45.1	76.3	113	-	-	-	-	-						
44	-	-	-	-	-	79	-	-	-	-	114	113 1/16	32.4	52.5	64.7	89.4							
45	44 3/16	13.4	21.3	25.7	45.0	80	79 10/16	22.2	37.1	46.0	77.1	115	-	-	-	-	-						
46	-	-	-	-	-	81	-	-	-	-	116	115 1/16	33.6	53.3	65.8	90.2							

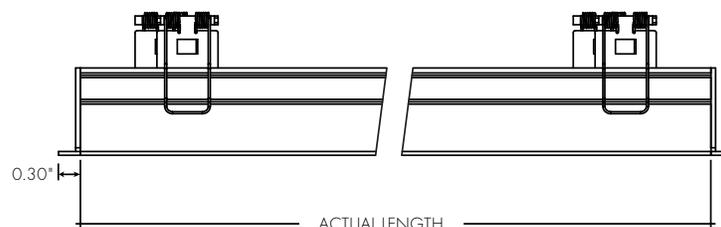


Power Consumption

Tested at Full Power with PDC Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

High Efficacy (2x HE64)

Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts
		VHO			VHO			VHO
12	11 8/16	14.5	47	46 5/16	58.2	82	81 2/16	91.5
13	13	16.4	48	47 13/16	60.1	83	82 10/16	92.1
14	–	–	49	–	–	84	–	–
15	14 8/16	18.2	50	49 5/16	62.0	85	84 3/16	92.7
16	–	–	51	50 14/16	63.8	86	85 11/16	93.3
17	16	20.1	52	–	–	87	–	–
18	17 9/16	22.0	53	52 6/16	65.6	88	87 3/16	94.0
19	–	–	54	53 14/16	67.4	89	88 11/16	94.6
20	19 1/16	23.9	55	–	–	90	–	–
21	20 9/16	25.7	56	55 6/16	69.6	91	90 3/16	95.2
22	–	–	57	56 14/16	71.2	92	91 12/16	95.8
23	22 1/16	27.6	58	–	–	93	–	–
24	23 9/16	29.5	59	58 7/16	72.8	94	–	–
25	–	–	60	59 15/16	74.4	95	–	–
26	25 2/16	31.4	61	–	–	96	–	–
27	26 10/16	33.3	62	61 7/16	75.6	97	–	–
28	–	–	63	62 15/16	76.8	98	–	–
29	28 2/16	35.2	64	–	–	99	–	–
30	29 10/16	37.2	65	64 8/16	78.0	100	–	–
31	–	–	66	66	79.2	101	–	–
32	31 3/16	39.1	67	–	–	102	–	–
33	32 11/16	41.0	68	67 8/16	80.3	103	–	–
34	–	–	69	–	–	104	–	–
35	34 3/16	42.9	70	69	81.3	105	–	–
36	35 11/16	44.9	71	70 8/16	82.4	106	–	–
37	–	–	72	–	–	107	–	–
38	37 3/16	46.7	73	72 1/16	83.4	108	–	–
39	38 12/16	48.6	74	73 9/16	85.1	109	–	–
40	–	–	75	–	–	110	–	–
41	40 4/16	50.4	76	75 1/16	86.8	111	–	–
42	41 12/16	52.3	77	76 9/16	88.5	112	–	–
43	–	–	78	–	–	113	–	–
44	43 4/16	54.2	79	78 2/16	90.2	114	–	–
45	44 13/16	56.2	80	79 10/16	90.8	115	–	–
46	–	–	81	–	–	116	–	–

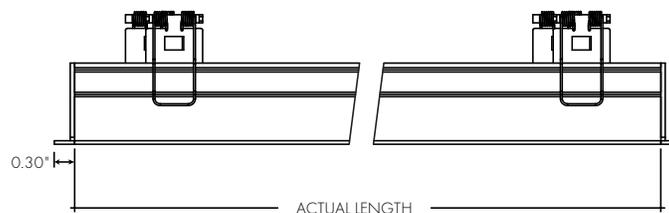

Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Universal Power Supply 1% 120VAC - 277VAC

MODEL	POWER	OUTPUT
PDCU-D - IP20 Dry Series	30 - 30 W 60 - 60 W 96 - 96 W 3X96 - 3X96 W	24 - 24 VDC

PDCU-W - IP66 Wet Series	96 - 96 W 3X96 - 3X96 W	
--------------------------	----------------------------	--

0-10V dims down to 1%, MLV/ELV/TRIAC dims down to 1%.
For a complete list of compatible dimmers, see [Compatible Dimming Chart](#) on the Resources page.


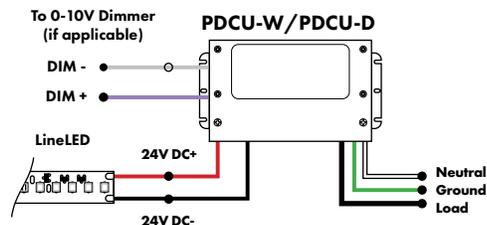


MODELS	PDCU-W 96W	PDCU-W 3X96W	PDCU-D 30W	PDCU-D 60W	PDCU-D 96W	PDCU-D 3X96W
Length	8.66"	11.85"	6.10"	7.93"	8.25"	9.57"
Width	3.73"	4.32"	3.35"	3.35"	4.10"	5.94"
Depth	1.61"	1.81"	1.33"	1.32"	1.56"	1.13"

0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	POWER	OUTPUT	DIMMING
PS010V - 0-10V Power Supply dims down to 0.1%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC	LIN - Linear LOG - Logarithmic


MODELS	96W	3X96
Length	14.40"	15.75"
Width	5.20"	6.62"
Depth	2.60"	4.95"

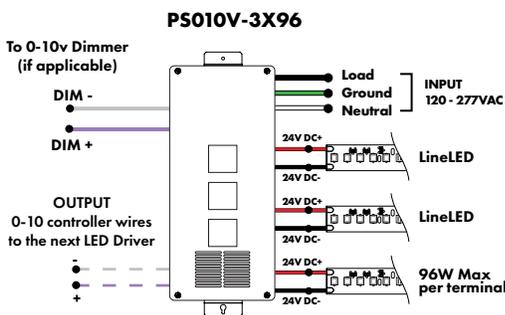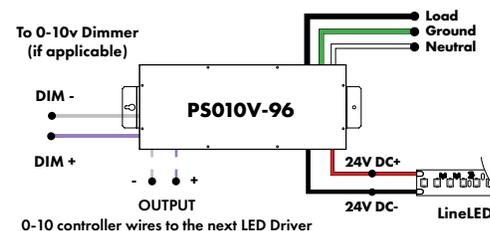

Triac, MLV, & ELV Compatible Dimmers

MODEL	POWER	OUTPUT
PDC - (IP20) Power Supply	96 - 96 Watts	24 - 24 VDC

MODELS	96W
Length	8.25"
Width	4.10"
Depth	1.56"

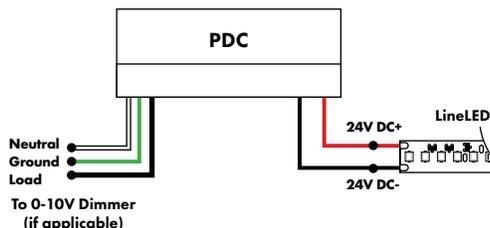

Power Supplies



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

DMX Dimming Power Supplies 120VAC - 277VAC

MODEL	POWER	OUTPUT
PSDMX - DMX Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers

MODELS	96W	3X96
Length	14.40"	15.75"
Width	5.20"	6.62"
Depth	2.60"	4.95"

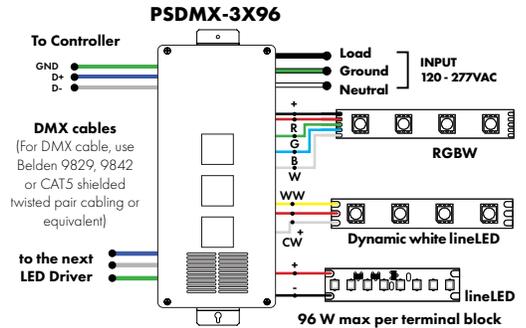
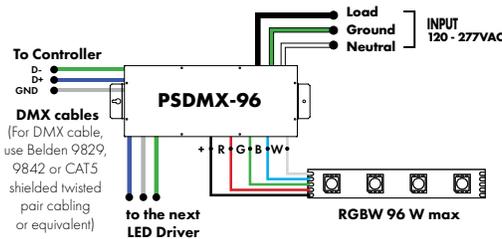


DALI 0% Dimming Power Supplies 120VAC - 277VAC

MODEL	POWER	OUTPUT
PSDALI - DALI Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers


Model	96W	3X96
Length	14.40"	15.75"
Width	5.20"	6.62"
Depth	2.60"	4.95"

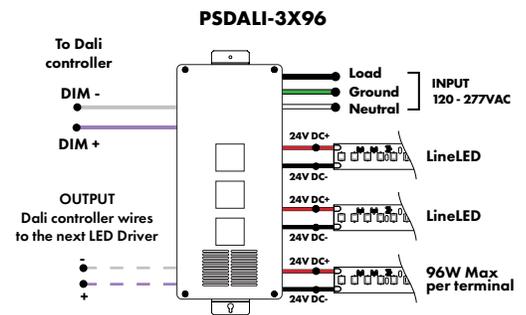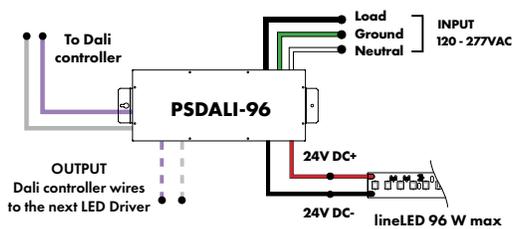

Enlighted Enabled Dimming Power Supplies 120VAC - 277VAC

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV - PSV Series	96 - 96 Watt	24 - 24 VDC	ENL - Enlighted Dimming dims down to 0%	D - Damp

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"

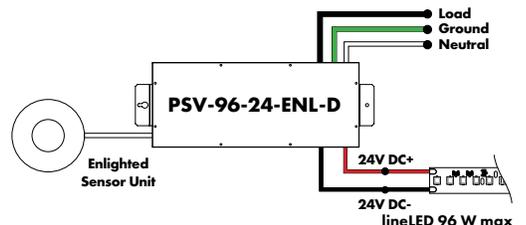


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Non-Dimming Power Supply 120VAC - 277VAC

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV - PSV Series	96 - 96 Watt	24 - 24 VDC	ND - Non Dimming	D - Damp

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

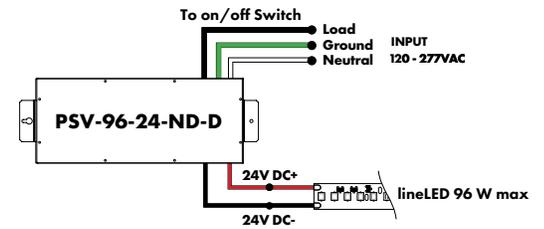


Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 1%

MODEL
L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver
40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

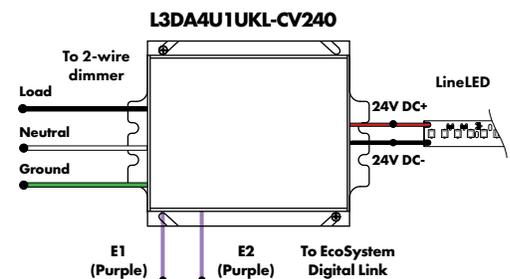


Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL
L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™
96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

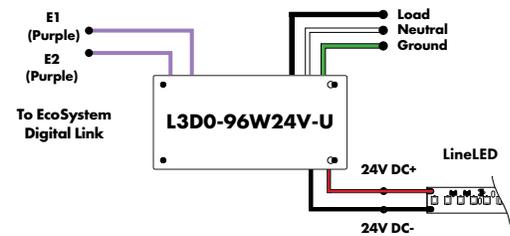

In-Ground Power Supplies

MODEL	POWER	OUTPUT	INPUT
IG - In ground CVE Series CVE - ELV Dimming DALI - eldoLED Dali dimming Both dims down to 0%	96X2 - 2 X 96 Watt	24 - 24 VDC	Blank - 120 V 277 - 240/277 V

MODELS	Dual Circuit
Length	8.40"
Width	8.30"
Depth	8.10"

