

0-10V Power Supply 3X96 Watt - Installation Instructions

Models PS-010V-LIN-D-3X96-24 & PS-010V-LOG-D-3X96-24



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043


REVO.2
09192024

1 / 2

Please read all instructions prior to installation and keep for future reference!

This class 2 power supply is to be installed by a qualified electrician in accordance with the National Electrical Code (NEC) and local building codes. The power supply must be installed in a well ventilated area and free from explosive gases and vapors. Proper operation requires the free flow of air. Power supply is well suited for LED or resistive loads at or below their maximum output rating per circuit. Suitable For Damp Location.

WARNING! Risk of Fire or Electric Shock, Do Not Interconnect Output Terminal.

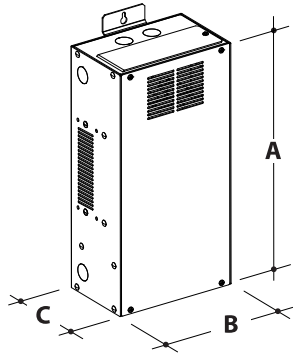

Models	PS-010V-LIN-D-3X96-24 PS-010V-LOG-D-3X96-24
A. Height	13.00"
B. Width	6.60"
C. Depth	4.20"
MAX Load	3 x 96 Watts

1 Before installing, check the label and ensure the power supply has the proper input voltage, output voltage, and wattage for the job. Check the wire markings to ensure they match the wiring diagram below. Refer to table above for the maximum loads supported by each power supply.

It is recommended that the power supply be mounted vertically & mount a minimum of 12" above ground level or deck, 24" below ceiling, and allow 4" of clearance around power supply (excluding the mounting side) to provide for proper air circulation. Use the provided hardware to mount properly to wall.

2 Remove the wiring compartment cover and knockouts on both ends of the power supply to connect.

3 Connect the white (neutral) and black (hot) power supply wires to the white and black power wires (120 - 277 VAC). Then, connect the ground wires in accordance with local electrical codes.

4 Reference wiring diagrams on page 2. Feed wire into the terminal block hole by inserting a small, flat-head screwdriver into the terminal block slot and push down, thus opening the terminal block hole. Then, insert the wire lead and release the screwdriver to secure wire in place.

terminal block intended wire size
solid or stranded : 28 - 12 AWG
strip length : 0.31 - 0.35

use Luminii voltage drop calculator (<http://www.luminii.com/voltage-drop-calculator>) to calculate wire gage for low-voltage connection

5 Secure compartment cover back onto the power supply.

0-10V Power Supply 3X96 Watt - Installation Instructions

Models PS-010V-LIN-D-3X96-24 & PS-010V-LOG-D-3X96-24

Please read all instructions prior to installation and keep for future reference!

This class 2 power supply is to be installed by a qualified electrician in accordance with the National Electrical Code (NEC) and local building codes. The power supply must be installed in a well ventilated area and free from explosive gases and vapors. Proper operation requires the free flow of air. Power supply is well suited for LED or resistive loads at or below their maximum output rating per circuit. Suitable For Damp Location.

WARNING! Risk of Fire or Electric Shock, Do Not Interconnect Output Terminal.

PLENUM FOR
SUCH USE IN
ACCORDANCE
WITH UL2043



REVO.2
09192024

2 / 2



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

WIRING DIAGRAM

