

# LETO 11 Adjustable

ADJUSTABLE OPTIC PENDANT LED DOWNLIGHT



**Leto 11 Adjustable - Adjustable Optic Pendant LED Downlight.** Leto 11 Adjustable is a large cylinder LED pendant with an adjustable optic. It is the perfect pendant for placing your light exactly where you need it in your space without distracting from your design. 360 degree rotation and up to 30 degree total tilt gives you the flexibility to customize your space however you want.

## Ordering Code

Fixture	<b>895</b>								
	1	2	3	4	5	6	7	8	
Driver							--	--	
	1	2	3	4	5	6	7	8	

## Product Specifications

**SAMPLE:** Fixture **895 - A90 - 610 - 27 - 07 - AR - 08 - 02** | Driver **952 - 08 - 00 - 01 - LCS - 120 - A90 - 07**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Accessory*2
<b>895</b> · Leto 11 Adjustable	<b>A90</b> · 93+ CRI Accuracy	<b>610</b> · 10° TIR*1 <b>618</b> · 18° <b>630</b> · 30° <b>645</b> · 45° <b>660</b> · 60°	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>07</b> · 700 (6.1W) <b>10</b> · 1000 (9.1W) <b>15</b> · 1500 (14W) <b>20</b> · 2000 (19.8W)*1 <b>30</b> · 3000 (31.8W) <b>35</b> · 3500 (34.6W)	<b>00</b> · No Accessory <b>DL</b> · Diffusing Foil <b>HO</b> · Honeycomb <b>SL</b> · Solite Lens

7 - Body Color		8 - Baffle Color		1 - Canopy Style	2 - Canopy Color		3 - Suspension (6' incl.)
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	<b>951</b> · Round <b>951F</b> · Round Flangeless <b>952</b> · Square	<i>Standard</i>	<i>Premium</i>	<b>02</b> · 2 Aircraft + Feed Cable <b>03</b> · Solid Stem (6' MAX) <b>04</b> · Hang Straight Solid Stem <b>05</b> · 2 Powered Aircraft*8 <i>Contact Senso for custom length</i>
<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL		<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	

4 - Suspension Color	5 - Driver	Dim Level	Dim Level	6 - Voltage	7 - LED	8 - Lumen
<b>00</b> · None*8 <b>01</b> · White <b>02</b> · Black <b>03</b> · Clear <b>XX</b> · Custom	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase*3 <b>ELDOLC</b> · EldoLED 0 - 10 Volt*4 <b>DALI</b> · Dali Protocol*4	N/A 1% 1% 0.1% 0.1%	<b>LUTES</b> · Hilume Ecodigital*4 <b>LUT2W</b> · 2 Wire for phase*3/4 <b>DMX</b> · Senso*5 <b>EMG</b> · Emergency Driver*5/6 <b>CSMB</b> · Casambi Wireless Control*5/6	1% 1%   	<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V*7	Same as Fixture Same as Fixture

\*1 TIR 2000lm MAX

\*2 confirm accessories with Senso

\*3 120V only

\*4 requires square canopy

\*5 remote mount

\*6 second driver required

\*7 not available with ELDO, Lutron or DMX

\*8 no suspension color option for **05** - 2 Powered Aircraft

# LETO 11 Adjustable

## ADJUSTABLE OPTIC PENDANT LED DOWNLIGHT

### Canopy / Suspension

**Round Canopy:** W - Ø5.17" [131.24 mm] / H - 2.36" [60mm]

Drivers mounted in the Round Canopy: **STD, LCS, DIM**

Drivers remote mounted: **ELDOLC, DALI, LUTES, LUTW2, DMX, EMG, CSMB**

**Square Canopy:** W/L - 5.67" [144mm] / H - 2.28" [58mm]


Drivers mounted in the Square Canopy: **STD, LCS, DIM, ELDOLC, DALI, LUTES**

Drivers remote mounted: **DMX, EMG, CSMB**

**Round Flangless:** W - Ø2.53" [64.25 mm]

All drivers remote mount

**2 Aircraft Cable  
w/ Feed Cable**



**2 Powered  
Aircraft Cable**



**Solid Stem**



**Hang Straight  
Solid Stem (MAX 30°)**



### Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

**Faceted Reflector**



### Accessories

**Diffusing Lens**



**Honeycomb Mesh**



**Solite Lens**




### Installation

- The included canopy fits on a standard junction box
- Height adjustable aircraft cable, feed cable or solid stem suspension (specify height) included
- Electrical feed cable included
- 360 degree rotation with up to 30 degrees of tilt

### Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

### Dimensions

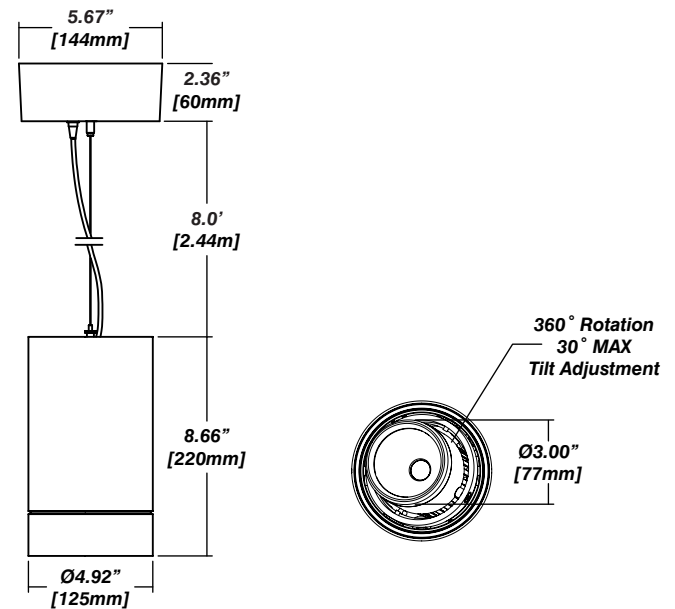

# LETO 11 Adjustable



ADJUSTABLE OPTIC PENDANT LED DOWNLIGHT

## Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See [Sensolighting.com](http://Sensolighting.com) for more information.

*\*Full photometric Reports and IES files available for every configuration*

## Color Metrics

### TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

*\*Full Color Metric Info Available at [Sensolighting.com](http://Sensolighting.com)*

## LED Module Performance

**Output:** Up to 113 lumen/Watt

**Efficacy:** Color consistency within a 3-MacAdam Ellipse

**CCT:** 2500K - 6500K

**Color Rendering:** 93+ CRI

**Min. R Values:** R<sup>9</sup> - 60 R<sup>f</sup> - 90 R<sup>a</sup> - 100

## Driver and Power Consumption

**Dimming:** 1% dimming standard with 0.1% option  
Casambi wireless control available


**Ripple:** Industry leading Low ripple

**Efficiency:** Power Factor >0.9  
Efficiency over 85%

Class 2 output for safety

**Installation:** Remote mounted

## Leto Light Distribution: Reflector

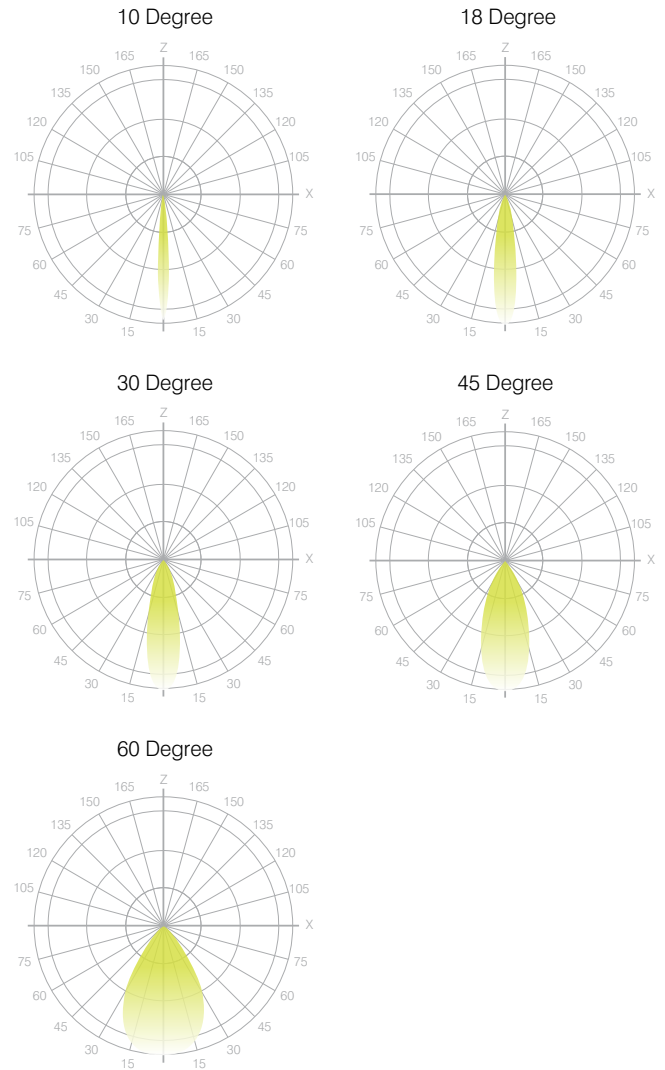

Lumen Option	700lm	1000lm	1500lm	2000lm	3000lm	3500lm
Fixture Wattage	6.1W	9.1W	14W	19.8W	31.8W	34.6W
Delivered Lumen	656lm	1035lm	1539lm	1917lm	2986lm	3518lm