


# LETO 11

WALL MOUNT ASYMMETRIC LED DOWNLIGHT  
TUNABLE WHITE/WARM DIM

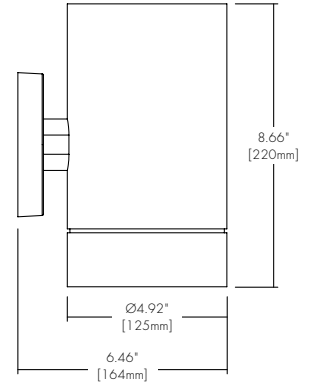

## Features

- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 1300 lumens.
- 5 year warranty.

## Finish Options

- White
- Black
- Silver
- Mocha
- Charcoal
- Cerulean
- Firebrick



## Technical Information

TYPE	WD1830			TW2765
	<b>OUTPUT OPTIONS</b>	700 lm	1000lm	1300lm
<b>Fixture wattage</b>	8.51 W	11.16 W	16.06 W	16.41 W
<b>Delivered Lumen at full on</b>	807 lm	1129 lm	1597 lm	1141 lm
<b>Efficacy</b>	95 lm/W	101 lm/W	99 lm/W	70 lm/W
<b>Center Beam Candlepower (18° Faceted Reflector)</b>	5325 cd	7692 cd	11834 cd	7571 cd

CCT	CRI	TM-30		
		R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

Integral Driver Example: Fixture LET11-WM-07-WD1830-ASM-DL-WH-WH-PHSD-NA

Remote Driver Example: Fixture LET11-WM-07-WD1830-ASM-DL-WH-WH-PHSD-NA  
HRM-LET11-WM-07-WD1830-010L-NA

## Ordering Code

### Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET11 - Leto 11	WM - Wall Mount	07 - 700 lumens <sup>1</sup> 10 - 1000 lumens 13 - 1300 lumens	WD1830 - Warm Dim, 1800K-3000K TW2765 - Tunable White, 2700K-6500K*	ASM - Asymmetric	DL - Diffusing Lens	<b>Standard</b> WH - White BK - Black SL - Silver  <b>Premium<sup>2</sup></b> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	<b>Standard</b> WH - White BK - Black SL - Silver  <b>Premium<sup>2</sup></b> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick
<b>DRIVER<sup>3</sup></b>			<b>DRIVER OPTIONS<sup>5</sup></b>				

PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only  
 010S - 0-10V, 1% Dimming, 120/277V  
 0103 - 0-10V, 1% Dimming, 347V Only  
 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V  
 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V  
 DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V  
 DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V  
 LUTE - Lutron HiLume Ecodigital, 1% Dimming, 120V/277V  
 DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V

NA - None  
 EMG - Emergency Driver<sup>4</sup>

1 - 700 lumens is not available with LUTE driver.  
 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.  
 3 - All drivers remote except PHSD/010S driver options.  
 4 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.  
 5 - AWWNR/CSMB available upon request, contact Senso for details.  
 6 - TW2765 only available with 13 lumens and 010L/010G/DALI8/DMX. Always remote mounted. Cannot use with EMG.

CONTACT FACTORY FOR MORE OPTIONS.

# LETO 11

WALL MOUNT ASYMMETRIC LED DOWNLIGHT  
TUNABLE WHITE/WARM DIM

## Lens

---

### DL

Diffusing Lens

---



Light Loss Factor: 87%\*

\*Light Loss Factor calculated with 60° faceted reflector.

# LETO 11

WALL MOUNT ASYMMETRIC LED DOWNLIGHT  
TUNABLE WHITE/WARM DIM


## Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	CCT	OUTPUT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11-WM-Leto 11 Wall Mount	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

### HRM Single with Externally Mounted Driver

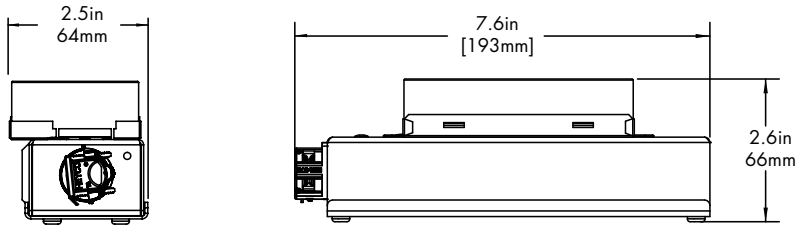


Driver
010L or 010G
010S
010L or 010G or 010S
DALI or LUTE

### HRM Single

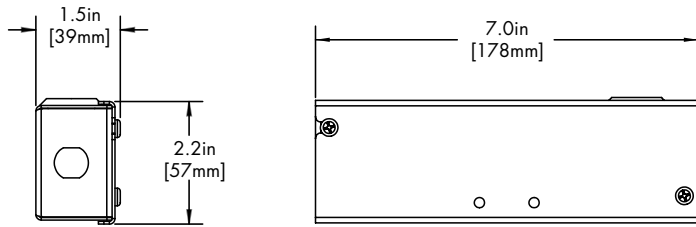

Driver
PHSD


### HRM Double

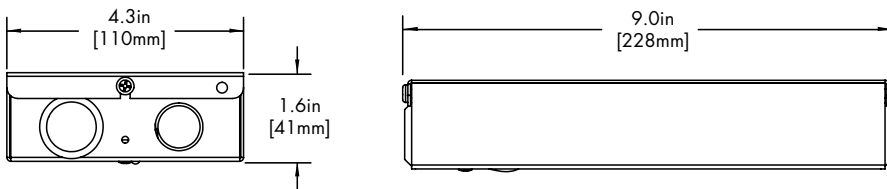

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

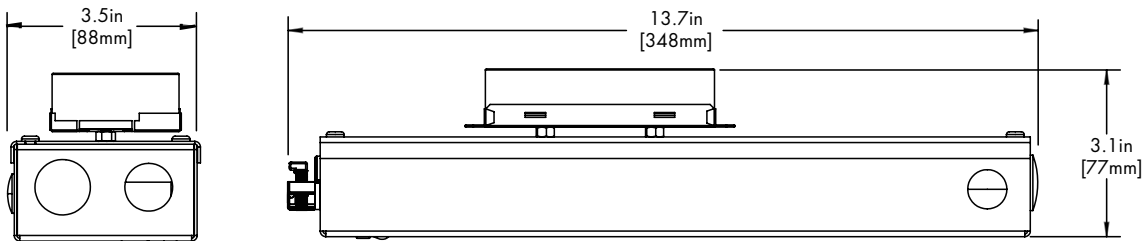

Driver
EMG

# LETO 11

WALL MOUNT ASYMMETRIC LED DOWNLIGHT  
TUNABLE WHITE/WARM DIM

## Standard Finishes

**BK**  
Black



**WH**  
White




**SL**  
Silver



## Premium Finishes


**MA**  
Mocha




**CC**  
Charcoal



**CR**  
Cerulean






**FB**  
Firebrick



## Two Tone Baffle

Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.




# LETO 11

WALL MOUNT ASYMMETRIC LED DOWNLIGHT  
TUNABLE WHITE/WARM DIM

## TM-30

Warm Dim 1800K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Warm Dim 3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 6500K

COLOR VECTOR GRAPHIC



— Reference Source — Test Source

## Photometry

### 18° Faceted Reflector

