


LETO 11

WALL MOUNT UP/DOWN LED CYLINDER

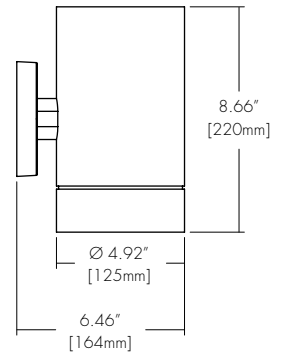

Features

- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Two output options available up to 1000 lumens.
- Five year warranty.

Finish Options

- White
- Black
- Silver
- Mocha
- Charcoal
- Cerulean
- Firebrick



Technical Information

| | OUTPUT OPTIONS | 700 lm | 1000 lm |
|------|---|----------|----------|
| DOWN | Fixture wattage | 6.1 W | 9.1 W |
| | Delivered Lumen at 3500K | 656 lm | 1035 lm |
| | Efficacy | 108 lm/W | 114 lm/W |
| | Center Beam Candlepower (10° Faceted Reflector) | 5474 cd | 8636 cd |
| UP | Fixture wattage | 6.1 W | 9.1 W |
| | Delivered Lumen at 3500K | 614 lm | 857 lm |
| | Efficacy | 101 lm/W | 94 lm/W |

| CCT | Multiplier | CRI | TM-30 | | |
|-------|------------|-----|----------------|----------------|----------------|
| | | | R _f | R _g | R ₉ |
| 2500K | 0.81 | 92 | 90 | 104 | 77 |
| 2700K | 0.92 | 92 | 91 | 102 | 61 |
| 3000K | 0.97 | 95 | 92 | 102 | 61 |
| 3500K | 1.00 | 95 | 93 | 101 | 72 |
| 4000K | 1.07 | 95 | 92 | 103 | 68 |
| 6500K | 1.05 | 96 | 91 | 100 | 89 |

Ordering Code

Integral Driver Example: Fixture LET11-WM-0707-25K-F10-F17-CL-WH-WH-PHSD-NA
 Remote Driver Example: Fixture LET11-WM-0707-25K-F10-F17-CL-WH-WH-010L-NA
 HRM-LET11-WM-0707-25K-010L-NA

| MODEL | TYPE | OUTPUT | CCT | OPTIC | OPTIC UP | ACCESSORY | BODY FINISH | BAFFLE FINISH |
|---------------------|---------------|--|--|---|--|---|--|--|
| LET11-Leto 11 | WM-Wall Mount | 0707-700 lumens Down, 700 lumens up 1010-1000 lumens Down, 1000 lumens up | 25K-2500K 27K-2700K 30K-3000K 35K-3500K 40K-4000K 65K-6500K | F10-10 Degree, Faceted F18-18 Degree, Faceted F30-30 Degree, Faceted F45-45 Degree, Faceted F60-60 Degree, Faceted S30-30 Degree, Smooth S45-45 Degree, Smooth S80-80 Degree, Smooth | F17-17 Degree, Faceted F24-24 Degree, Faceted F60-60 Degree, Faceted | NA- No Accessory CL- Clear Lens DL- Diffusing Lens HC- Honeycomb Louver SL- Solite Lens | Standard WH- White BK- Black SL- Silver Premium ¹ MA- Mocha CC- Charcoal CR- Cerulean FB- Firebrick | Standard WH- White BK- Black SL- Silver Premium ¹ MA- Mocha CC- Charcoal CR- Cerulean FB- Firebrick |
| DRIVER ² | | | | DRIVER OPTIONS ⁴ | | | | |

PHSD- Forward/Reverse Phase, 1% Dimming, 120V Only
 010S- 0-10V, 1% Dimming, 120/277V
 0103- 0-10V, 1% Dimming, 347V Only
 010L- EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V
 010G- EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V
 DALI- EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V
 DALI8- EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V
 LUTE- Lutron Hilume Ecodigital, 1% Dimming, 120V/277V
 DMX- EldoLED, DMX, 0.1% Dimming, 120V/277V

NA- None
 EMG- Emergency Driver³

1 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request
 2 - All drivers remote except PHSD/010S driver options
 3 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.
 4 - AWWNR/CSMB available upon request, contact Senso for details.

CONTACT FACTORY FOR MORE OPTIONS.

Lens & Accessory Options

OPTC-ACC-CL-94MM

Clear Lens

Also available with complete fixture, use ordering code.

-CL



Light Loss Factor: 100%*

OPTC-ACC-DL-94MM

Diffusing Lens

Also available with complete fixture, use ordering code.

-DL



Light Loss Factor: 87%*

OPTC-ACC-HC-94MM

Honeycomb Lens

Also available with complete fixture, use ordering code.

-HC



Light Loss Factor: 45%*

OPTC-ACC-SL-94MM

Solite Lens

Also available with complete fixture, use ordering code.

-SL



Light Loss Factor: 92%*

*Light Loss Factor calculated with 60° faceted reflector.

Optics

RFLC-FXX-94MM

Faceted Reflector

Also available with complete fixture, use ordering code.

-F10/-F18/-F30/-F45/-F60



RFLC-SXX-94MM

Smooth Reflector

Also available with complete fixture, use ordering code.

-S30/-S45/-S60



| FXX | Optic |
|-----|-------------|
| F10 | 10° Faceted |
| F18 | 18° Faceted |
| F30 | 30° Faceted |
| F45 | 45° Faceted |
| F60 | 60° Faceted |
| S30 | 30° Smooth |
| S45 | 45° Smooth |
| S60 | 60° Smooth |


Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

| REMOTE DRIVER | MODEL | CCT | OUTPUT | DRIVER | DRIVER OPTIONS |
|---------------------|------------------------------|-----------------|-----------------|-----------------|-----------------|
| HRM-Housing, Remote | LET11-WM-letto 11 Wall Mount | Same as Fixture | Same as Fixture | Same as Fixture | Same as Fixture |


| Maximum mounting distance to luminaire using 18 AWG wire | | | | | | |
|--|------|------|------|------------|------|------|
| 010S | PHSD | 010L | 010G | DALI DALI8 | DMX | LUTE |
| 16' | 16' | 72' | 72' | 72' | 149' | 15' |

HRM Single with Externally Mounted Driver

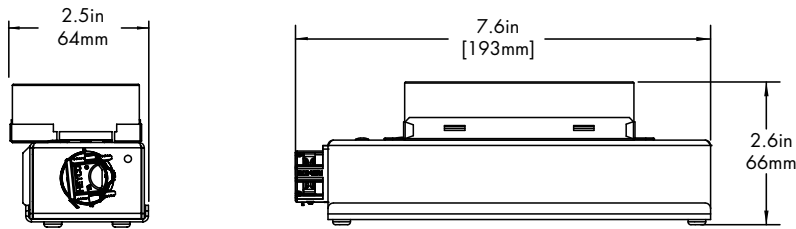


| Driver |
|----------------------|
| 010L or 010G |
| 010S |
| 010L or 010G or 010S |
| DALI or LUTE |

HRM Single

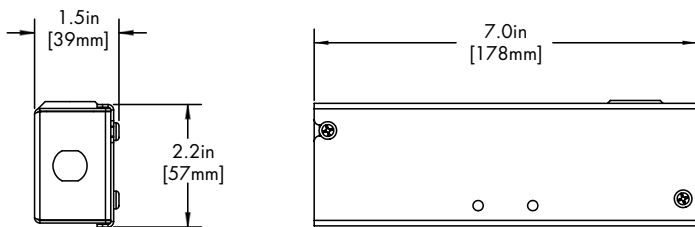

| Driver |
|--------|
| PHSD |


HRM Double

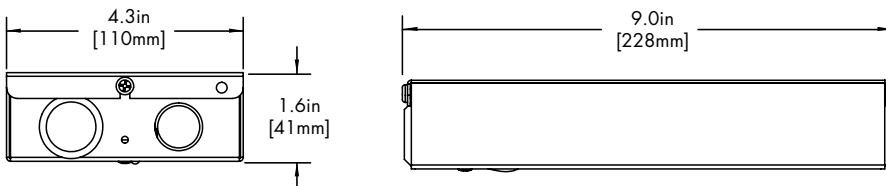

| Driver |
|--------|
| DALI8 |
| DMX |

EMG Emergency Driver

120 minute EMG operation time.

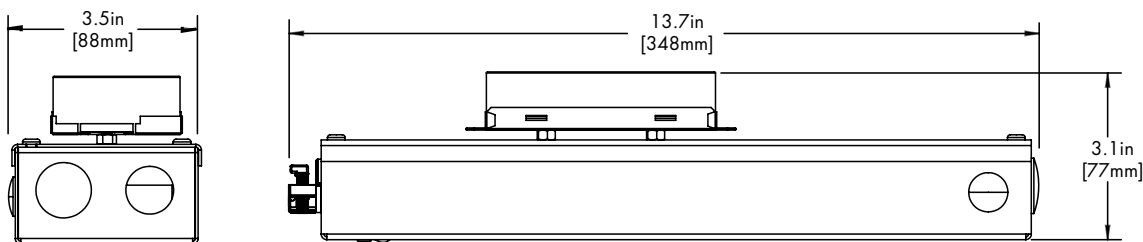

| Driver |
|--------|
| EMG |

Standard Finishes

BK
Black



WH
White



SL
Silver



Premium Finishes


MA
Mocha




CC
Charcoal



CR
Cerulean






FB
Firebrick



Two Tone Baffle


Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.



TM-30

2500K


COLOR VECTOR GRAPHIC

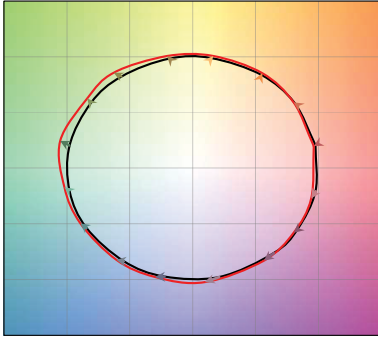

— Reference Source — Test Source

2700K


COLOR VECTOR GRAPHIC

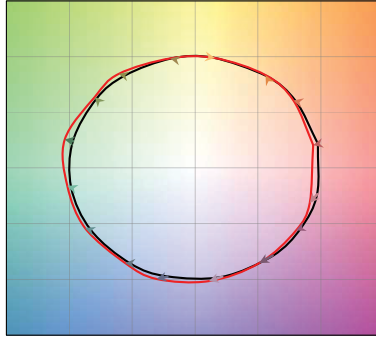

— Reference Source — Test Source

3000K


COLOR VECTOR GRAPHIC

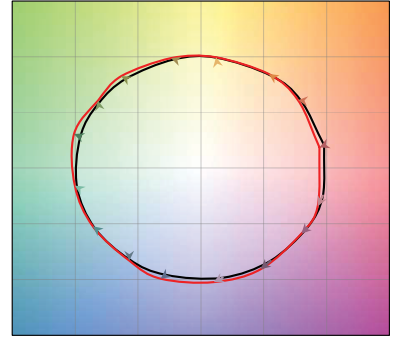

— Reference Source — Test Source

3500K


COLOR VECTOR GRAPHIC

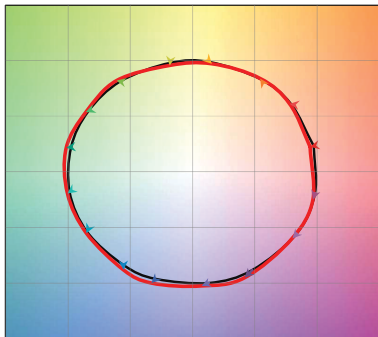

— Reference Source — Test Source

4000K


COLOR VECTOR GRAPHIC

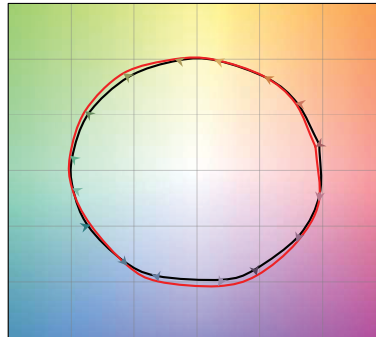

— Reference Source — Test Source

6500K


COLOR VECTOR GRAPHIC

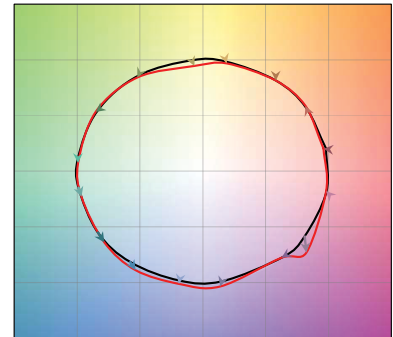

— Reference Source — Test Source

Photometry

LET11-WM-0707-35K-F10-F17-NA

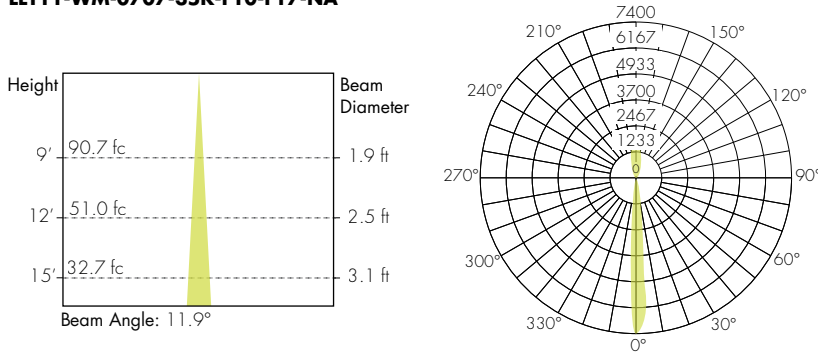

LET11-WM-1010-35K-F10-F17-NA

