



Features

- Class 2 0-10V controlled LED Driver
- Features eldoLED's LINEARdrive configurable 0-10V driver rated at 96 watt
- Suitable For Dry Location
- Must be connected to Lutron Athena Control System
- 5 Year warranty
- Factory Installed Lutron Athena Wireless Node - simplifying set up time, enabling straightforward programming via the Lutron Designer software Application
- Digital wireless control communication for a dynamic lighting control system for smart buildings and human-centric experiences



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

Technical Information

Input voltage
120-277V AC, 1.1A, 50/60Hz

Output signal
24 VDC, 4.0 A

Maximum wattage
96 watt circuits

Mounting
Surface mounted with conduit access

Dimming
0-10V, Linear or Logarithmic curve 100% - 0.1% (Lutron Athena)


Ambient Operating Temperature
-20°C to +35°C

Weight
3.8 lbs


Athena Node
1 zone of control for up to 96W

Athena Radio Frequency
2.4 GHz

Athena Range
Each Athena wireless node should be installed within 25ft of two or more Athena wireless nodes

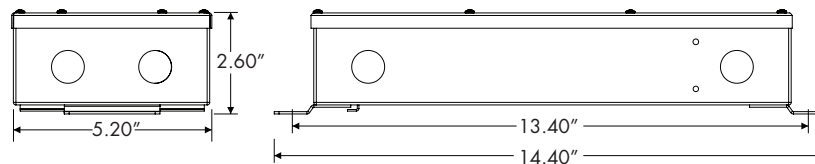

Wiring Diagram

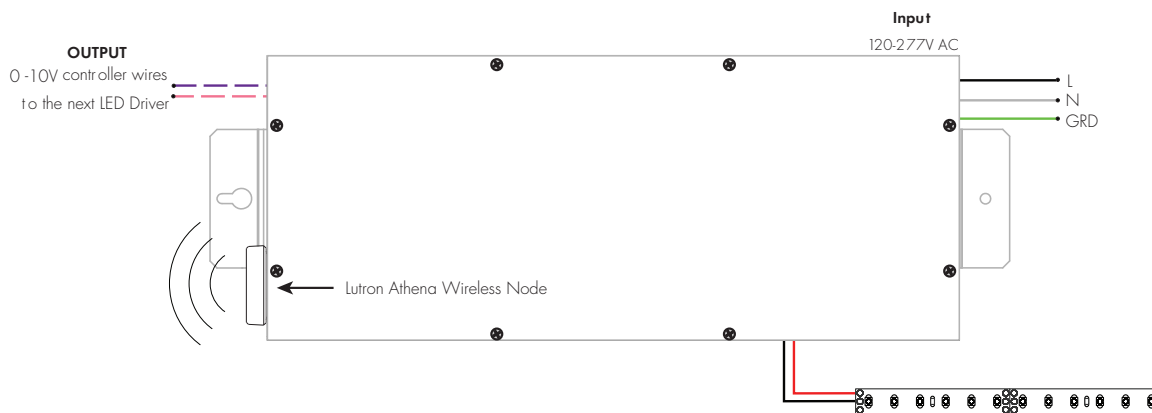

Ordering Code

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming, Linear 010V-LOG - 0-10V Dimming, Logarithmic	D - Dry	96 - 96 W	24 - 24 VDC	AWNR - Athena