



Features

- Class 2
- 0-10V controlled LED Driver
- Features eldoLED's LINEARdrive configurable 0-10V driver rated at 96 watt each
- Suitable For Damp Location
- 5 Year warranty



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

Technical Information

Input voltage

120-277V AC, 1.1A, 50/60Hz

Output signal

24 VDC, 4.0 A

Maximum wattage

96 watt circuits

Mounting

Surface mounted with conduit access

Dimming curve

Linear, Logarithmic

100% - 0% (HydraDrive)

Dimming


0-10V (dimmer needs to be capable to dim to 0% without ON/OFF switch)

Ambient Operating Temperature


-20°C to +35°C

Weight

3.8 lbs

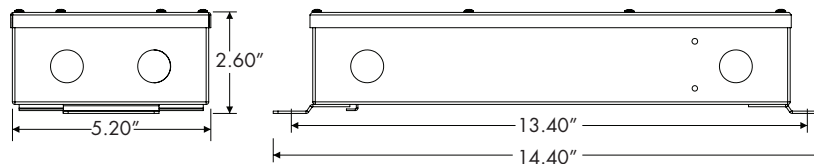

Wiring Diagram

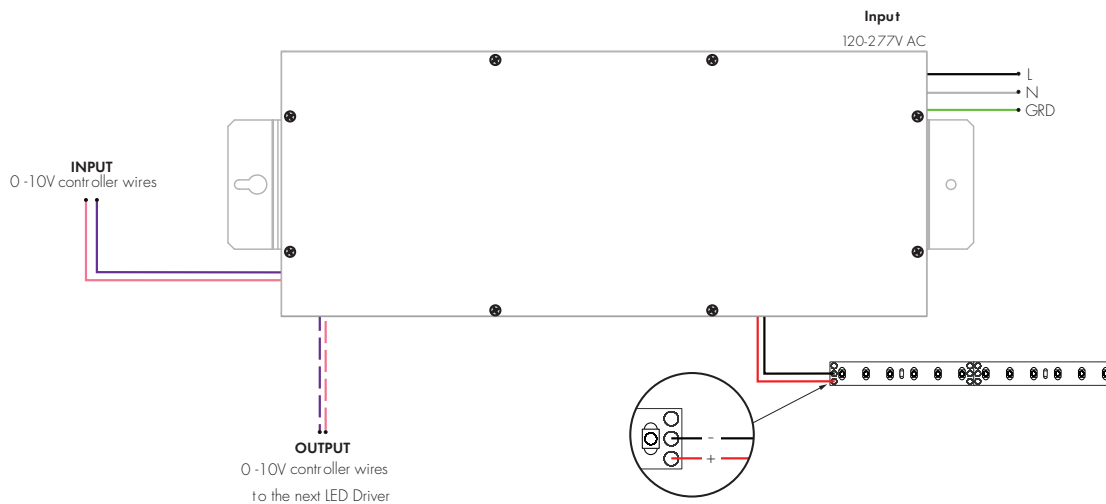

Ordering Code

