



Features

- Class 2 Dali controlled power supply features eidoLED's LINEARdrive
- Configurable Dali drivers allowing independent control of 3 outputs rated at 96 watt each
- Suitable For Damp Location
- 5 Year warranty



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

Technical Information

Input voltage

120-277V AC, 3.3A, 50/60Hz

Output signal

24 VDC, 3 x 4.0 A

Maximum wattage

3 x 96 watt circuits

Dimming curve

Linear, 100% - 0% (HydraDrive)

Ambient Operating Temperature


-20C to +35C

Mounting


Surface mounted with conduit access

Weight

13 lbs

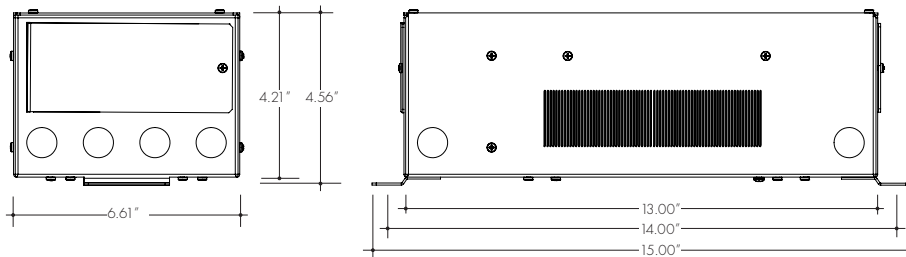

Wiring Diagram

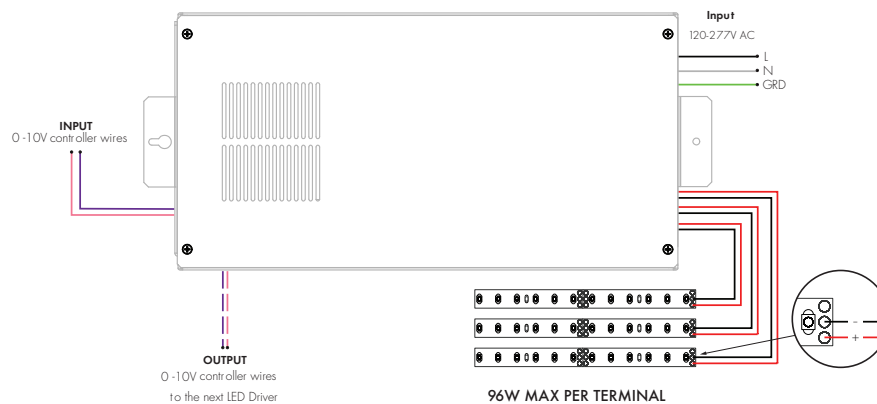

Ordering Code

