


Installation Instructions for mCove Rectangle
Line Voltage Models



7777 N. Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Page 1 of 6

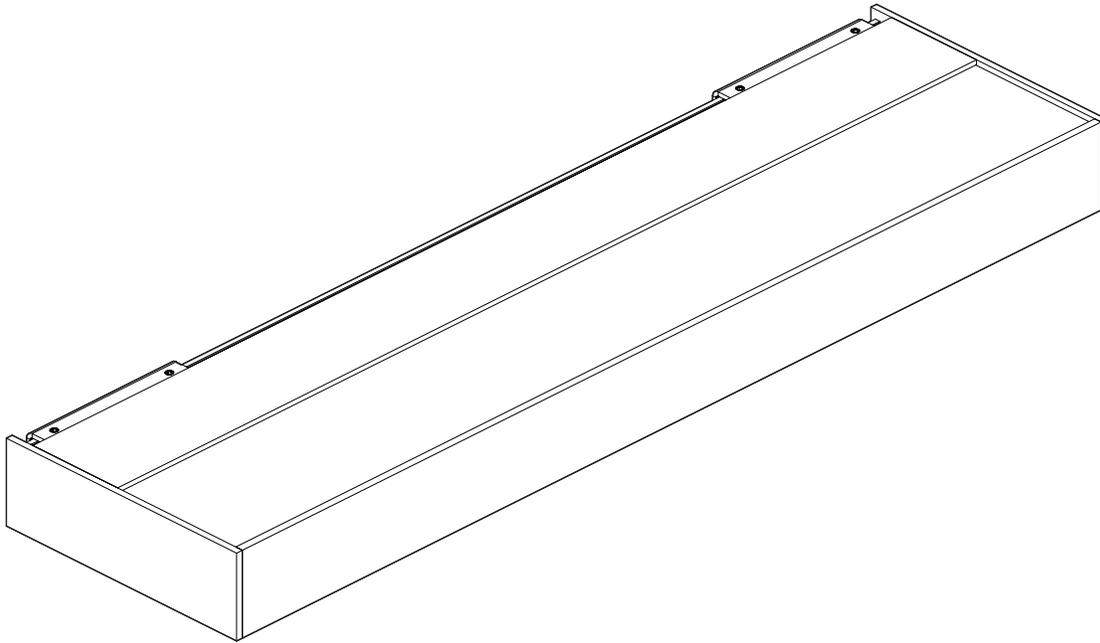

Installation Instructions for mCove Rectangle Line Voltage

Models M-REC-XX



7777 N. Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com



Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. 120/277 VAC INPUT
3. SUITABLE FOR DAMP LOCATIONS
4. SURFACE MOUNT ONLY
5. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE
6. INHERENTLY PROTECTED

Page 2 of 6

1

1.1 cover

1.2 screw

1.3 reflector

1.1 From the inside of the fixture, carefully insert a flathead screwdriver to the edge. Followed by carefully pulling on the cover to remove.

1.2 Loosen & remove all the screws from the center of the reflector.

1.3 Carefully, rotate and pull the reflector completely out.

2

BACK OF FIXTURE

NOTE: Prior to installing the fixture, power wires must be present near fixture installation.

NOTE: Mounting bracket quantities vary depending on size. Typically 1 bracket per every 12". If joining as a system, make sure to use a bracket inbetween fixtures to align to each other.

2.1 From the back of the fixture, measure the 2 outer mounting brackets from each other.

2.2 Mark the mounting brackets locations to the wall.

2.2 Mark the mounting brackets locations to the wall.

3

3.1

3.2

3.1 Line up the anchors to the marked points. Then tap anchors until the threaded portion. Followed by screwing the remaining with a Phillips screw driver.

3.2 Align the mounting brackets to the anchors and secure in place using the provided screws.

Installation Instructions for mCove Rectangle Line Voltage

Models M-REC-XX



7777 N. Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com



Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. 120/277 VAC INPUT
3. SUITABLE FOR DAMP LOCATIONS
4. SURFACE MOUNT ONLY
5. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE
6. INHERENTLY PROTECTED

4

4.1 Bring in the power wires into the fixture. Align the fixture to the mounting brackets and secure in place using the 2 set screws for each mounting bracket. Use the provided conduit connector if necessary, in accordance with local electrical codes.

5

- 5.1** Connect the white (neutral) & black (line) conduit wires to the white & black power supply wires.
- 5.2** Connect the ground wire in accordance with local electrical codes.
- 5.3** If applicable, connect the low voltage controller wires coming from the conduit to the integral low voltage wires (varies depending on power supply), reference page 7 for wiring diagrams.
- 5.4** Insert the LED panel into the fixture and secure using the provided screws. Snap-in the cover in the fixture (cover will fit loose inside the fixture).

Installation Instructions for mCove Rectangle Line Voltage

Models M-REC-XX



7777 N. Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com




Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. 120/277 VAC INPUT
3. SUITABLE FOR DAMP LOCATIONS
4. SURFACE MOUNT ONLY
5. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE
6. INHERENTLY PROTECTED


Page 4 of 6

Static - Wiring Diagrams


INT 120 Wiring

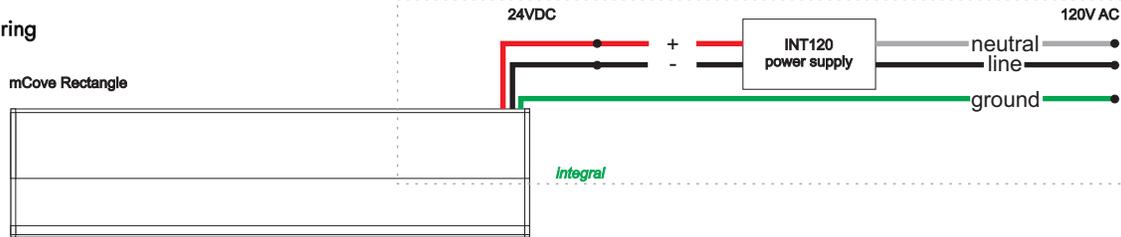


INT 120/277 Wiring

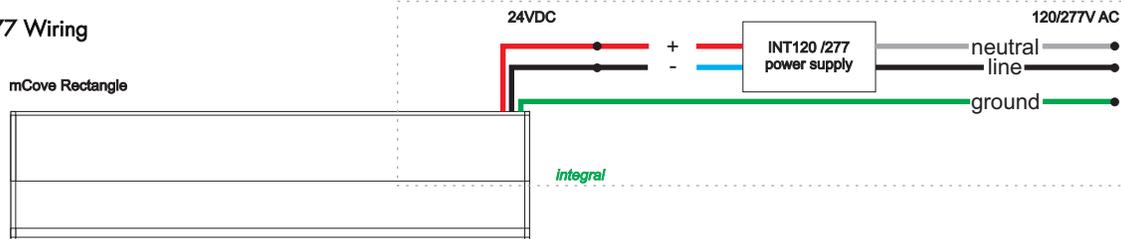


INTELV Wiring

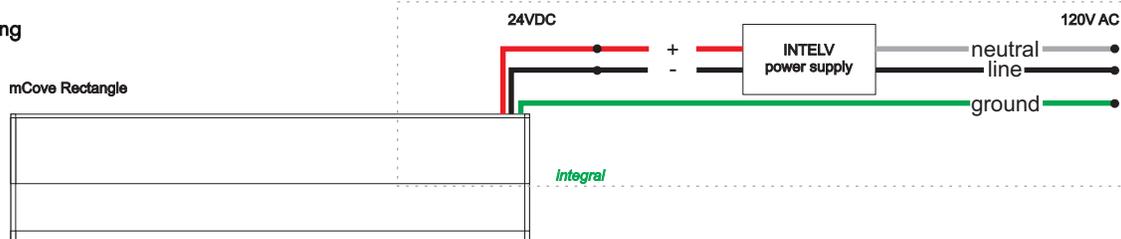

INT010120 Wiring

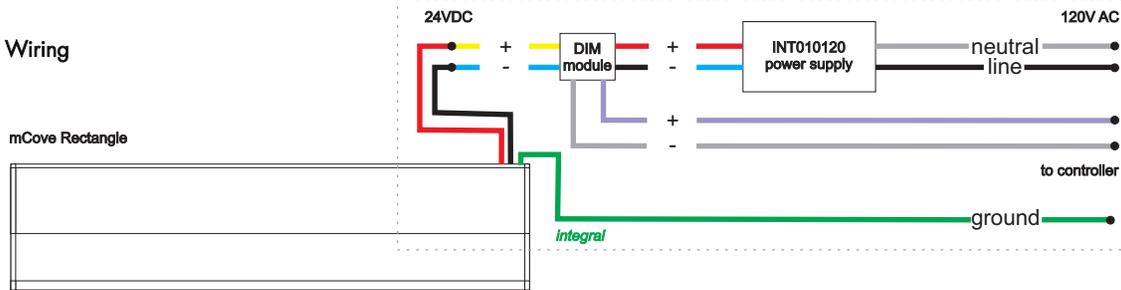

INT010277 Wiring

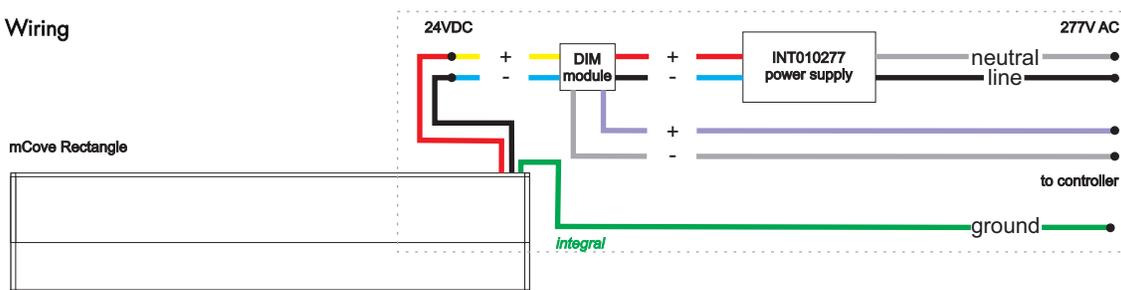

Installation Instructions for mCove Rectangle Line Voltage

Models M-REC-XX



7777 N. Merrimac Ave
 Niles, IL 60714
 T 224.333.6033
 F 224.757.7557
 info@luminii.com
 www.luminii.com




Please read all instructions prior to installation and keep for future reference!


- | | |
|--|--|
| 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN. | 4. SURFACE MOUNT ONLY |
| 2. 120/277 VAC INPUT | 5. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE |
| 3. SUITABLE FOR DAMP LOCATIONS | 6. INHERENTLY PROTECTED |

Color-Wiring Diagrams

W2C120-277 Wiring

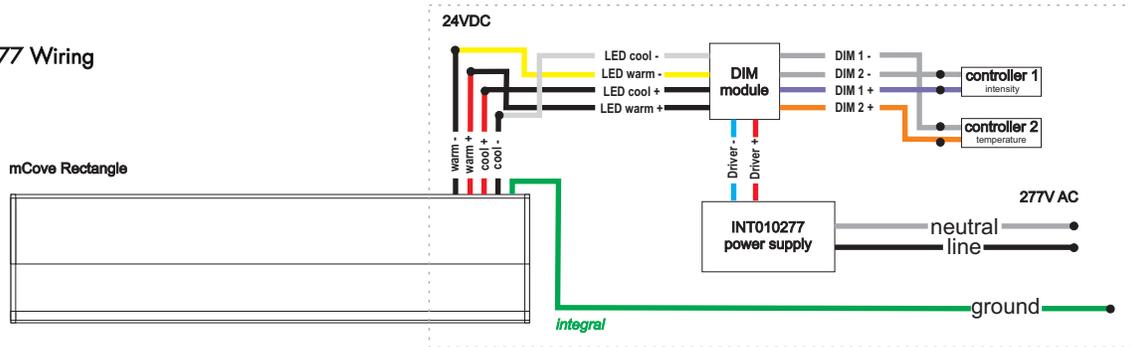

W2I120-277 Wiring

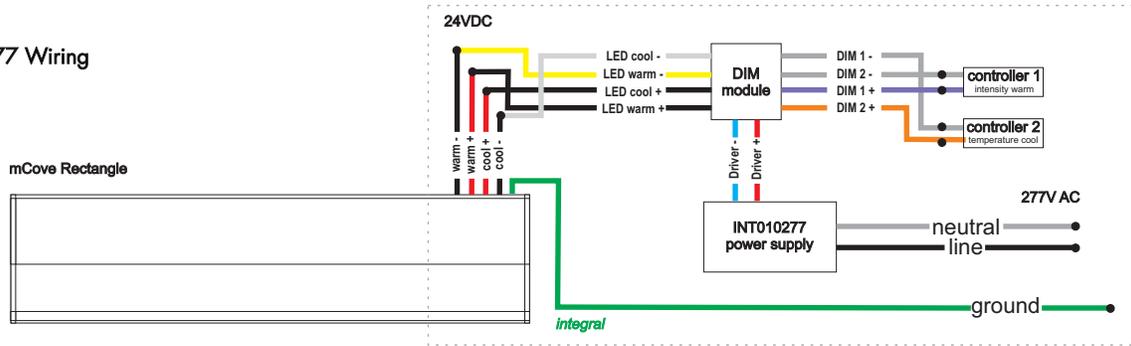

Installation Instructions for mCove Rectangle Line Voltage

Models M-REC-XX



7777 N. Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com



Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. 120/277 VAC INPUT
3. SUITABLE FOR DAMP LOCATIONS
4. SURFACE MOUNT ONLY
5. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE
6. INHERENTLY PROTECTED

Page 6 of 6

System Guide

