


# SOLO 16 PLUS STUCCHI

## 13° ULTRA NARROW BEAM

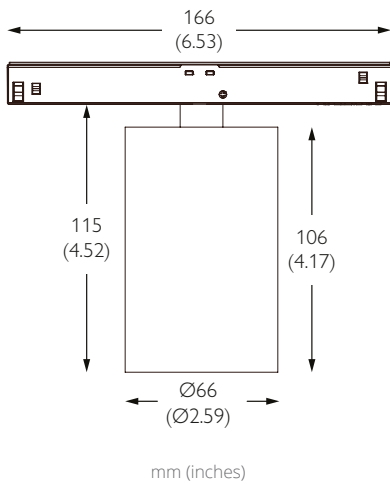

### TECHNICAL DESCRIPTION

Solo 16 Plus Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The ultra narrow beam in our 12.60W 1200lm module has a peak intensity of 16929cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

### MECHANICAL & ELECTRICAL

<b>CATEGORY</b> IP20	<b>WATTAGE</b> 12.60W
<b>MATERIAL</b> Machined AL 6063-T6   Machined Brass	<b>FORWARD VOLTAGE</b> 48V
<b>PAN</b> 360°	<b>SUPPLY TYPE</b> Constant Voltage
<b>TILT</b> 90°	<b>DRIVER LOCATION</b> Remote AC to 48VDC
<b>LOCKABLE</b> Pan	<b>DIMMING</b> DALI   0-10V   1-10V   Casambi
<b>WEIGHT</b> 395g 570g*   0.87lb 1.25lb*	

### MOUNTING




**MOUNTING** 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

### FINISHES


**FINISHES** Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze\* | Polished Brass\* | Satin Brass\*

\*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

### OPTICAL & STANDARDS

<b>NOMINAL LUMENS</b> 1200lm	<b>BEAM ANGLE</b> 13°
<b>DELIVERED LUMENS</b> 1127lm	<b>CRI</b> 92 TYP - 2400K   98 TYP - 2700K/3000K
<b>COLOUR TEMPERATURE</b> 2400K   2700K   3000K	<b>TM-30</b> RF: 95 RG: 101
<b>ACCESSORY HOLDER</b> Separate	<b>WARRANTY</b> 5 Years
<b>ACCESSORIES</b> Lenses   Louver 55mm (2.16")	<b>LIFETIME</b> L90B10 50,000hrs
<b>TM65</b> 17.52kgCO2e	<b>STANDARDS</b>
<b>TM66</b> 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

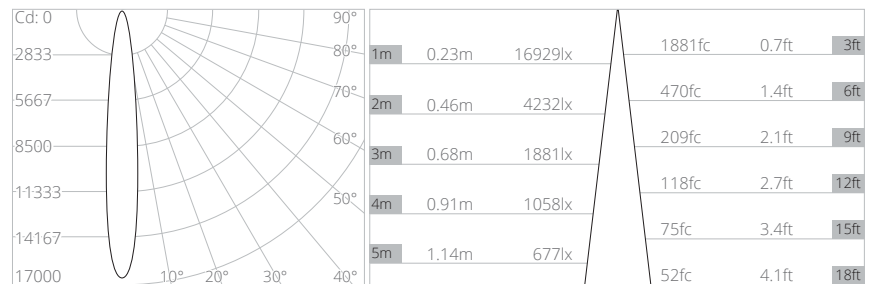


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052C	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> </ul>	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> <li>A Brushed Aluminium</li> <li>R Rubbed Bronze*</li> <li>P Polished Brass*</li> <li>S Brushed Brass*</li> </ul>	<ul style="list-style-type: none"> <li>2490 2400K 90CRI</li> <li>2798 2700K 98CRI</li> <li>3098 3000K 98CRI</li> <li>4095 4000K 95CRI</li> </ul>	<ul style="list-style-type: none"> <li>13 Ultra Narrow 13°</li> <li>15 Narrow 15°</li> <li>25 Medium 25°</li> <li>40 Flood 40°</li> <li>50 Wide Flood 50°</li> </ul>	<ul style="list-style-type: none"> <li>A 0-10V</li> <li>B 1-10V</li> <li>C Casambi</li> <li>D DALI</li> </ul>

Example Code: 1052C - TT - 279815 - D

\*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

# SOLO 16 PLUS STUCCHI

## 15° NARROW BEAM

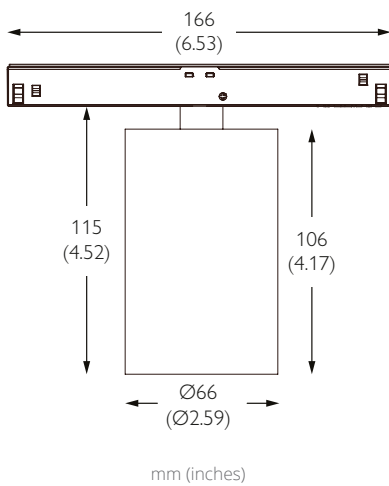

### TECHNICAL DESCRIPTION

Solo 16 Plus Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The narrow beam in our 12.60W 1200lm module has a peak intensity of 14173cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

### MECHANICAL & ELECTRICAL

<b>CATEGORY</b> IP20	<b>WATTAGE</b> 12.60W
<b>MATERIAL</b> Machined AL 6063-T6   Machined Brass	<b>FORWARD VOLTAGE</b> 48V
<b>PAN</b> 360°	<b>SUPPLY TYPE</b> Constant Voltage
<b>TILT</b> 90°	<b>DRIVER LOCATION</b> Remote AC to 48VDC
<b>LOCKABLE</b> Pan	<b>DIMMING</b> DALI   0-10V   1-10V   Casambi
<b>WEIGHT</b> 395g 570g*   0.87lb 1.25lb*	

### MOUNTING




**MOUNTING** 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

### FINISHES


**FINISHES** Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze\* | Polished Brass\* | Satin Brass\*

\*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

### OPTICAL & STANDARDS

<b>NOMINAL LUMENS</b> 1200lm	<b>BEAM ANGLE</b> 15°
<b>DELIVERED LUMENS</b> 1104lm	<b>CRI</b> 92 TYP - 2400K   98 TYP - 2700K/3000K
<b>COLOUR TEMPERATURE</b> 2400K   2700K   3000K	<b>TM-30</b> RF: 95 RG: 101
<b>ACCESSORY HOLDER</b> Separate	<b>WARRANTY</b> 5 Years
<b>ACCESSORIES</b> Lenses   Louver 55mm (2.16")	<b>LIFETIME</b> L90B10 50,000hrs
<b>TM65</b> 17.52kgCO2e	<b>STANDARDS</b>
<b>TM66</b> 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

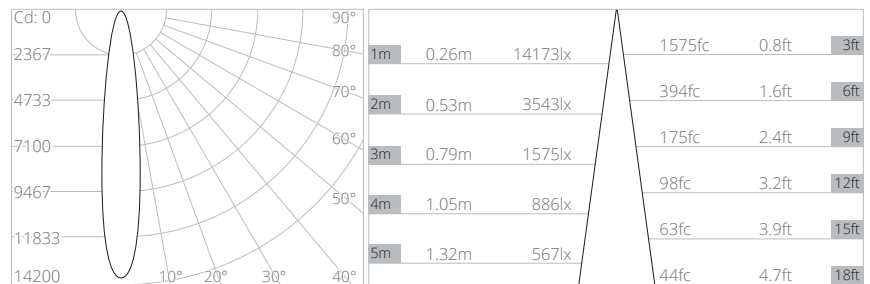


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052C	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> </ul>	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> <li>A Brushed Aluminium</li> <li>R Rubbed Bronze*</li> <li>P Polished Brass*</li> <li>S Brushed Brass*</li> </ul>	<ul style="list-style-type: none"> <li>2490 2400K 90CRI</li> <li>2798 2700K 98CRI</li> <li>3098 3000K 98CRI</li> <li>4095 4000K 95CRI</li> </ul>	<ul style="list-style-type: none"> <li>13 Ultra Narrow 13°</li> <li>15 Narrow 15°</li> <li>25 Medium 25°</li> <li>40 Flood 40°</li> <li>50 Wide Flood 50°</li> </ul>	<ul style="list-style-type: none"> <li>A 0-10V</li> <li>B 1-10V</li> <li>C Casambi</li> <li>D DALI</li> </ul>

Example Code: 1052C - TT - 279815 - D

\*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

# SOLO 16 PLUS STUCCHI

## 25° MEDIUM BEAM

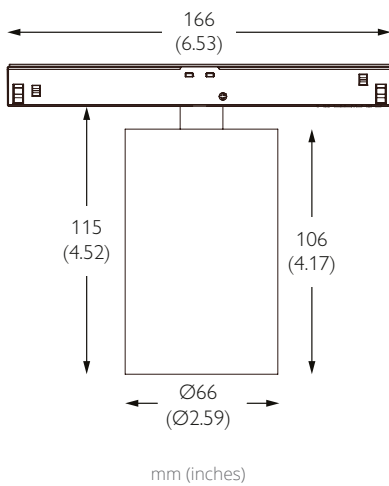

### TECHNICAL DESCRIPTION

Solo 16 Plus Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The medium beam in our 12.60W 1200lm module has a peak intensity of 5149cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

### MECHANICAL & ELECTRICAL

<b>CATEGORY</b> IP20	<b>WATTAGE</b> 12.60W
<b>MATERIAL</b> Machined AL 6063-T6   Machined Brass	<b>FORWARD VOLTAGE</b> 48V
<b>PAN</b> 360°	<b>SUPPLY TYPE</b> Constant Voltage
<b>TILT</b> 90°	<b>DRIVER LOCATION</b> Remote AC to 48VDC
<b>LOCKABLE</b> Pan	<b>DIMMING</b> DALI   0-10V   1-10V   Casambi
<b>WEIGHT</b> 395g 570g*   0.87lb 1.25lb*	

### MOUNTING





**MOUNTING** 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

### FINISHES


**FINISHES** Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze\* | Polished Brass\* | Satin Brass\*

\*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

### OPTICAL & STANDARDS

<b>NOMINAL LUMENS</b> 1200lm	<b>BEAM ANGLE</b> 25°
<b>DELIVERED LUMENS</b> 1072lm	<b>CRI</b> 92 TYP - 2400K   98 TYP - 2700K/3000K
<b>COLOUR TEMPERATURE</b> 2400K   2700K   3000K	<b>TM-30</b> RF: 95 RG: 101
<b>ACCESSORY HOLDER</b> Separate	<b>WARRANTY</b> 5 Years
<b>ACCESSORIES</b> Lenses   Louver 55mm (2.16")	<b>LIFETIME</b> L90B10 50,000hrs
<b>TM65</b> 17.52kgCO2e	<b>STANDARDS</b>
<b>TM66</b> 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

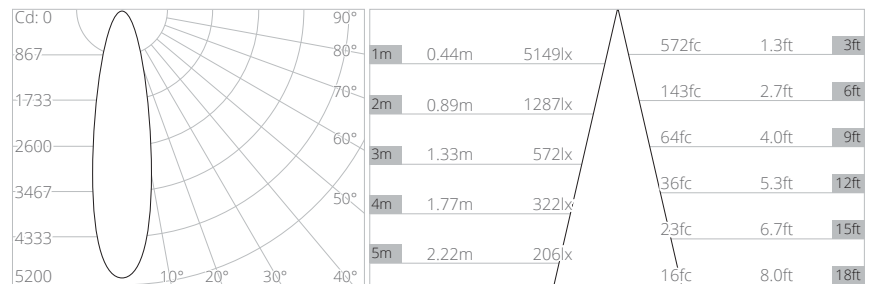


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052C	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> </ul>	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> <li>A Brushed Aluminium</li> <li>R Rubbed Bronze*</li> <li>P Polished Brass*</li> <li>S Brushed Brass*</li> </ul>	<ul style="list-style-type: none"> <li>2490 2400K 90CRI</li> <li>2798 2700K 98CRI</li> <li>3098 3000K 98CRI</li> <li>4095 4000K 95CRI</li> </ul>	<ul style="list-style-type: none"> <li>13 Ultra Narrow 13°</li> <li>15 Narrow 15°</li> <li>25 Medium 25°</li> <li>40 Flood 40°</li> <li>50 Wide Flood 50°</li> </ul>	<ul style="list-style-type: none"> <li>A 0-10V</li> <li>B 1-10V</li> <li>C Casambi</li> <li>D DALI</li> </ul>

Example Code: 1052C - TT - 279815 - D

\*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

# SOLO 16 PLUS STUCCHI

## 40° FLOOD BEAM

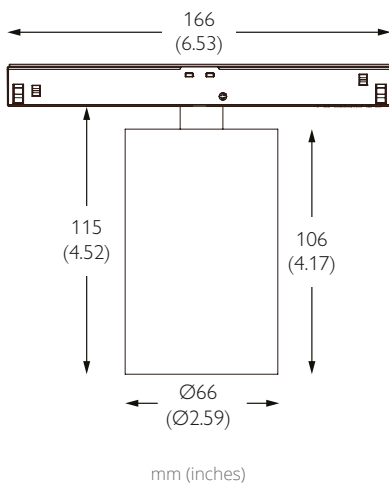

### TECHNICAL DESCRIPTION

Solo 16 Plus Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The flood beam in our 12.60W 1200lm module has a peak intensity of 2358cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

### MECHANICAL & ELECTRICAL

<b>CATEGORY</b> IP20	<b>WATTAGE</b> 12.60W
<b>MATERIAL</b> Machined AL 6063-T6   Machined Brass	<b>FORWARD VOLTAGE</b> 48V
<b>PAN</b> 360°	<b>SUPPLY TYPE</b> Constant Voltage
<b>TILT</b> 90°	<b>DRIVER LOCATION</b> Remote AC to 48VDC
<b>LOCKABLE</b> Pan	<b>DIMMING</b> DALI   0-10V   1-10V   Casambi
<b>WEIGHT</b> 395g 570g*   0.87lb 1.25lb*	

### MOUNTING





**MOUNTING** 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

### FINISHES


**FINISHES** Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze\* | Polished Brass\* | Satin Brass\*

\*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

### OPTICAL & STANDARDS

<b>NOMINAL LUMENS</b> 1200lm	<b>BEAM ANGLE</b> 40°
<b>DELIVERED LUMENS</b> 987lm	<b>CRI</b> 92 TYP - 2400K   98 TYP - 2700K/3000K
<b>COLOUR TEMPERATURE</b> 2400K   2700K   3000K	<b>TM-30</b> RF: 95 RG: 101
<b>ACCESSORY HOLDER</b> Separate	<b>WARRANTY</b> 5 Years
<b>ACCESSORIES</b> Lenses   Louver 55mm (2.16")	<b>LIFETIME</b> L90B10 50,000hrs
<b>TM65</b> 17.52kgCO2e	<b>STANDARDS</b>
<b>TM66</b> 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

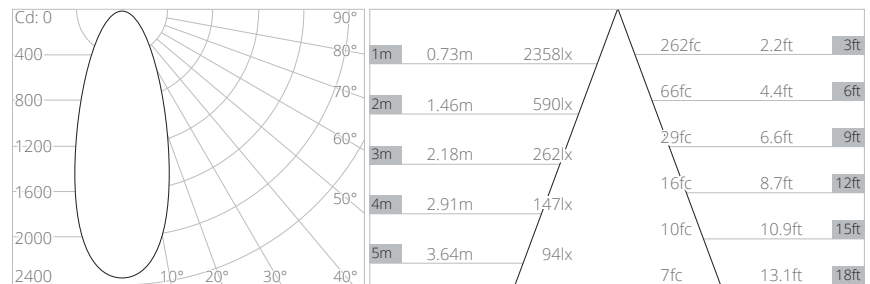


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052C	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> </ul>	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> <li>A Brushed Aluminium</li> <li>R Rubbed Bronze*</li> <li>P Polished Brass*</li> <li>S Brushed Brass*</li> </ul>	<ul style="list-style-type: none"> <li>2490 2400K 90CRI</li> <li>2798 2700K 98CRI</li> <li>3098 3000K 98CRI</li> <li>4095 4000K 95CRI</li> </ul>	<ul style="list-style-type: none"> <li>13 Ultra Narrow 13°</li> <li>15 Narrow 15°</li> <li>25 Medium 25°</li> <li>40 Flood 40°</li> <li>50 Wide Flood 50°</li> </ul>	<ul style="list-style-type: none"> <li>A 0-10V</li> <li>B 1-10V</li> <li>C Casambi</li> <li>D DALI</li> </ul>

Example Code: 1052C - TT - 279815 - D

\*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

# SOLO 16 PLUS STUCCHI

## 50° WIDE FLOOD BEAM

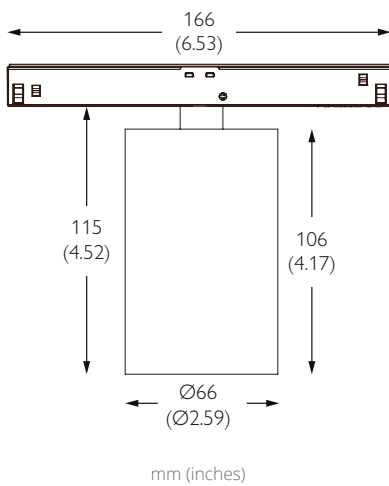

### TECHNICAL DESCRIPTION

Solo 16 Plus Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The wide flood beam in our 12.60W 1200lm module has a peak intensity of 1545cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

### MECHANICAL & ELECTRICAL

<b>CATEGORY</b> IP20	<b>WATTAGE</b> 12.60W
<b>MATERIAL</b> Machined AL 6063-T6   Machined Brass	<b>FORWARD VOLTAGE</b> 48V
<b>PAN</b> 360°	<b>SUPPLY TYPE</b> Constant Voltage
<b>TILT</b> 90°	<b>DRIVER LOCATION</b> Remote AC to 48VDC
<b>LOCKABLE</b> Pan	<b>DIMMING</b> DALI   0-10V   1-10V   Casambi
<b>WEIGHT</b> 395g 570g*   0.87lb 1.25lb*	

### MOUNTING




**MOUNTING** 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

### FINISHES


**FINISHES** Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze\* | Polished Brass\* | Satin Brass\*

\*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

### OPTICAL & STANDARDS

<b>NOMINAL LUMENS</b> 1200lm	<b>BEAM ANGLE</b> 50°
<b>DELIVERED LUMENS</b> 979lm	<b>CRI</b> 92 TYP - 2400K   98 TYP - 2700K/3000K
<b>COLOUR TEMPERATURE</b> 2400K   2700K   3000K	<b>TM-30</b> RF: 95 RG: 101
<b>ACCESSORY HOLDER</b> Separate	<b>WARRANTY</b> 5 Years
<b>ACCESSORIES</b> Lenses   Louver 55mm (2.16")	<b>LIFETIME</b> L90B10 50,000hrs
<b>TM65</b> 17.52kgCO2e	<b>STANDARDS</b>
<b>TM66</b> 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

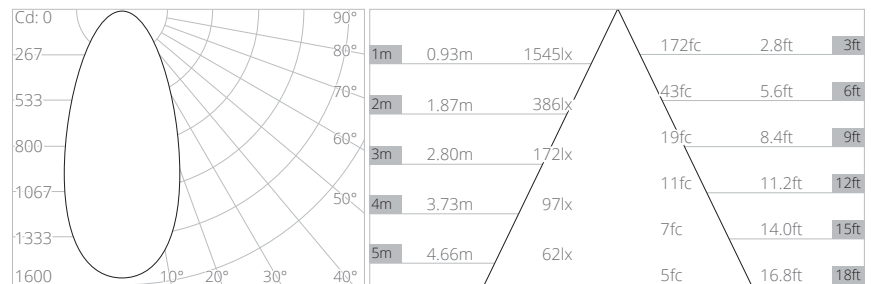

MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052C	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> </ul>	<ul style="list-style-type: none"> <li>T White 9016</li> <li>B Black 9005</li> <li>A Brushed Aluminium</li> <li>R Rubbed Bronze*</li> <li>P Polished Brass*</li> <li>S Brushed Brass*</li> </ul>	<ul style="list-style-type: none"> <li>2490 2400K 90CRI</li> <li>2798 2700K 98CRI</li> <li>3098 3000K 98CRI</li> <li>4095 4000K 95CRI</li> </ul>	<ul style="list-style-type: none"> <li>13 Ultra Narrow 13°</li> <li>15 Narrow 15°</li> <li>25 Medium 25°</li> <li>40 Flood 40°</li> <li>50 Wide Flood 50°</li> </ul>	<ul style="list-style-type: none"> <li>A 0-10V</li> <li>B 1-10V</li> <li>C Casambi</li> <li>D DALI</li> </ul>

Example Code: 1052C - TT - 279815 - D

\*Premium & custom finishes are built to order, subject to an extended lead time & MOQ