


SOLO 8 DYNAMIC WHITE STUCCHI

25° MEDIUM BEAM

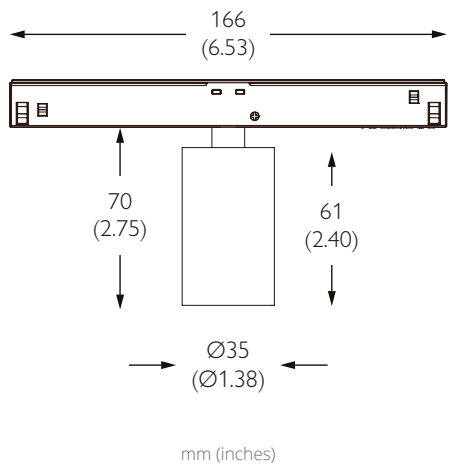

LIGHT ENGINE		OUTPUT SCALING	
1800-3000K	2700-5000K	Scaling Value	Delivered lm
1800K		0.52	185lm
2100K		0.72	256lm
2400K		0.90	320lm
2700K	2700K	0.90	320lm
3000K	3000K	1.00	356lm
	3500K	1.11	395lm
	4000K	1.11	406lm
	4500K	1.11	402lm
	5000K	1.10	392lm

TECHNICAL DESCRIPTION

Solo 8 Dynamic White Stucchi is a Constant Voltage LED spotlight with the option of 2 CCT tuning ranges (1800-3000K / 2700-5000K) and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The medium beam in our 7.20W 400lm module has a peak intensity of 1475cd. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 7.20W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 102g 0.22lb	





MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended


FINISHES

FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*
*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 400lm	BEAM ANGLE 25°
DELIVERED LUMENS 356lm	CRI 94 TYP
COLOUR TEMPERATURE 1800-3000K 2700-5000K	TM-30 RF: 92 RG: 99
ACCESSORY HOLDER N/A	WARRANTY 5 Years
ACCESSORIES N/A	LIFETIME L90B10 50,000hrs
TM65 8.77kgCO2e	STANDARDS
TM66 2.4	   

All data is for 2700-5000K module at 3000K. Scaling table shows output at different CCT settings.

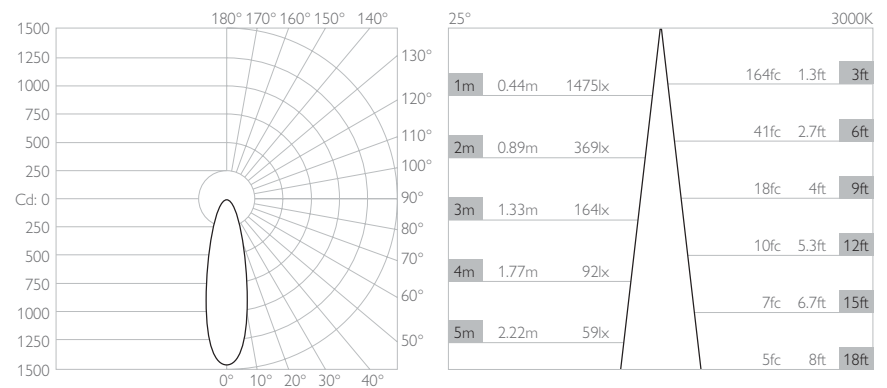


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1112T	<ul style="list-style-type: none"> T White 9016 B Black 9005 	<ul style="list-style-type: none"> T White 9016 B Black 9005 A Brushed Aluminium R Rubbed Bronze* P Polished Brass* S Brushed Brass* 	<ul style="list-style-type: none"> T01 1800K-3000K 94CRI T02 2700K-5000K 94CRI 	<ul style="list-style-type: none"> ME Medium 25° WD Wide 33° VW Very Wide 48° 	<ul style="list-style-type: none"> D DALI DT6 E DALI DT8

Example Code: 1112T - TT - T01WD - D6

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

SOLO 8 DYNAMIC WHITE STUCCHI

33° WIDE BEAM

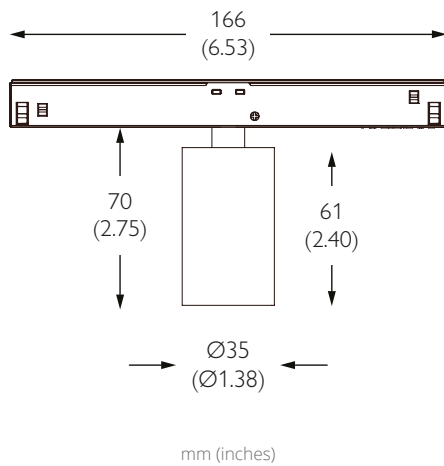

LIGHT ENGINE		OUTPUT SCALING	
1800-3000K	2700-5000K	Scaling Value	Delivered lm
1800K		0.52	190lm
2100K		0.72	264lm
2400K		0.90	329lm
2700K	2700K	0.90	329lm
3000K	3000K	1.00	366lm
	3500K	1.11	406lm
	4000K	1.11	417lm
	4500K	1.11	414lm
	5000K	1.10	403lm

TECHNICAL DESCRIPTION

Solo 8 Dynamic White Stucchi is a Constant Voltage LED spotlight with the option of 2 CCT tuning ranges (1800-3000K / 2700-5000K) and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The wide beam in our 7.20W 400lm module has a peak intensity of 1045cd. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 7.20W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 102g 0.22lb	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES


FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*
*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 400lm	BEAM ANGLE 33°
DELIVERED LUMENS 366lm	CRI 94 TYP
COLOUR TEMPERATURE 1800-3000K 2700-5000K	TM-30 RF: 92 RG: 99
ACCESSORY HOLDER N/A	WARRANTY 5 Years
ACCESSORIES N/A	LIFETIME L90B10 50,000hrs
TM65 8.77kgCO2e	STANDARDS
TM66 2.4	



All data is for 2700-5000K module at 3000K. Scaling table shows output at different CCT settings.

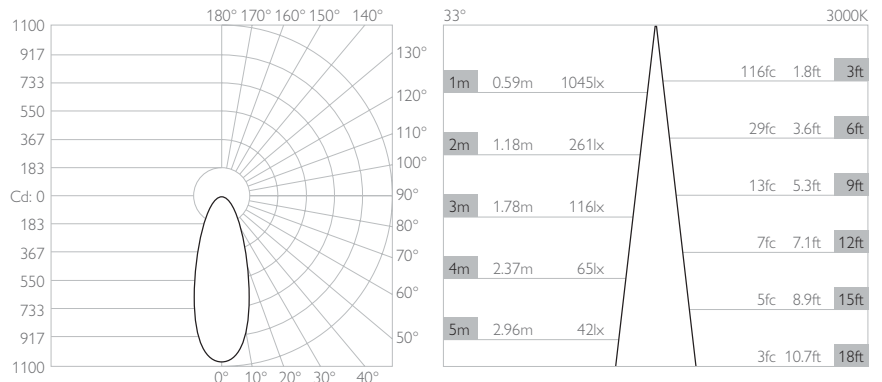


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1112T	<ul style="list-style-type: none"> T White 9016 B Black 9005 	<ul style="list-style-type: none"> T White 9016 B Black 9005 A Brushed Aluminium R Rubbed Bronze* P Polished Brass* S Brushed Brass* 	<ul style="list-style-type: none"> T01 1800K-3000K 94CRI T02 2700K-5000K 94CRI 	<ul style="list-style-type: none"> ME Medium 25° WD Wide 33° VW Very Wide 48° 	<ul style="list-style-type: none"> D DALI DT6 E DALI DT8

Example Code: 1112T - TT - T01WD - D6

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

SOLO 8 DYNAMIC WHITE STUCCHI

48° VERY WIDE BEAM

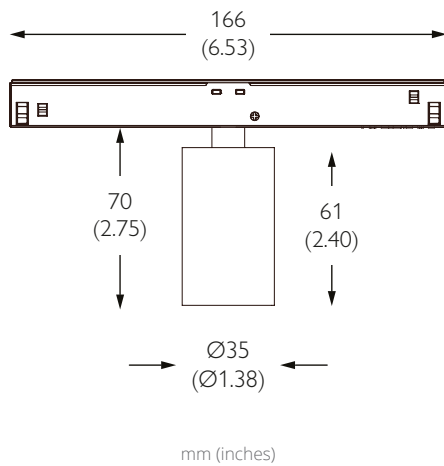

LIGHT ENGINE		OUTPUT SCALING	
1800-3000K	2700-5000K	Scaling Value	Delivered lm
1800K		0.52	200lm
2100K		0.72	276lm
2400K		0.90	346lm
2700K	2700K	0.90	346lm
3000K	3000K	1.00	384lm
	3500K	1.11	426lm
	4000K	1.11	438lm
	4500K	1.11	434lm
	5000K	1.10	422lm

TECHNICAL DESCRIPTION

Solo 8 Dynamic White Stucchi is a Constant Voltage LED spotlight with the option of 2 CCT tuning ranges (1800-3000K / 2700-5000K) and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The very wide beam in our 7.20W 400lm module has a peak intensity of 645cd. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 7.20W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 102g 0.22lb	




MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended


FINISHES

FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*
*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 400lm	BEAM ANGLE 48°
DELIVERED LUMENS 384lm	CRI 94 TYP
COLOUR TEMPERATURE 1800-3000K 2700-5000K	TM-30 RF: 92 RG: 99
ACCESSORY HOLDER N/A	WARRANTY 5 Years
ACCESSORIES N/A	LIFETIME L90B10 50,000hrs
TM65 8.77kgCO2e	STANDARDS
TM66 2.4	   

All data is for 2700-5000K module at 3000K. Scaling table shows output at different CCT settings.

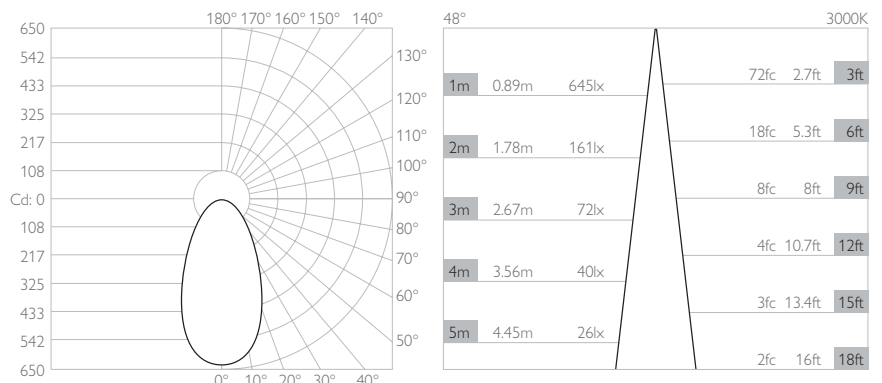

MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1112T	<ul style="list-style-type: none"> T White 9016 B Black 9005 	<ul style="list-style-type: none"> T White 9016 B Black 9005 A Brushed Aluminium R Rubbed Bronze* P Polished Brass* S Brushed Brass* 	<ul style="list-style-type: none"> T01 1800K-3000K 94CRI T02 2700K-5000K 94CRI 	<ul style="list-style-type: none"> ME Medium 25° WD Wide 33° VW Very Wide 48° 	<ul style="list-style-type: none"> D DALI DT6 E DALI DT8

Example Code: 1112T - TT - T01WD - D6

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ