

LUMINII HÖM

Master Bath Design Guide




VANITY

As bathroom lighting continues to become more important, there is no greater application than vanity lighting. The primary light source for tasks, as well as a beautifying accent, vanity lighting is essential to any well-lit bathroom. Decorative over-mirror or mirror adjacent sconces may be used for a traditional look. For a modern look, consider decorative pendants, recessed mud-in lighting, or the integration of LEDs into the mirror itself.

WALL SCNCES

DETAIL

Classic and Easy Installation
Direct Illumination

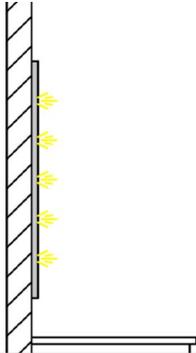

SELECT LUMINAIRE SPECIFICATIONS

Refer to Specification Sheet for More Information.



SECTION

RENDER



RECOMMENDED LUMINAIRE(S)

CLAREO WALL
Part Number: CLQW-(length)-(HO options)-27K-F-(finish)
*Power Supply: PDCU-D-96-24

ELV power supplies available to fit in J-box

TAPE & CHANNEL (For Field Assembly)


LED Tape: N/A
Extrusion: N/A
Power Supply: N/A



WALL SCNCES

DETAIL

Classic and Easy Installation
Direct Illumination



SELECT LUMINAIRE SPECIFICATIONS

Refer to Specification Sheet for More Information.



SECTION

RENDER



RECOMMENDED LUMINAIRE(S)

CLAREO WALL
Part Number: CLQW-(length)-(HO options)-27K-F-(finish)
Power Supply: PDCU-D-96-24

ELV power supplies available to fit in J-box

TAPE & CHANNEL (For Field Assembly)

LED Tape: N/A
Extrusion: N/A
Power Supply: N/A





NOTES

- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
- 2) Additional lumen packages are available. Refer to specification sheets.
- 3) Silver, Black, White, Bronze finishes are standard; New premium finishes available, contact factory for more information.



- Title 24 / JA8
- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI



DIRECT MIRROR SURROUND

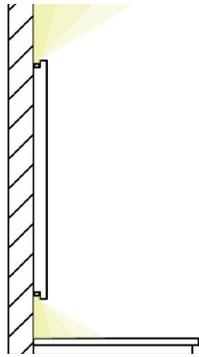DETAIL	SECTION	RENDER	RECOMMENDED LUMINAIRE(S)
<p>Ambient illumination. Modern accent. Supplementary downlight recommended.</p> 			<p>RECOMMENDED LUMINAIRE(S)</p> <ul style="list-style-type: none"> Kendo M Static White Part Number: KM-(length)-72HO-27K-F-FC-SA- (power feed info) Power Supply: PDCU-D-96-24 Kendo M Warm Dim Part Number: KM-(length)-WD68SO-19K-27K-F-FC-(finish)-(power feed info) Power Supply: PDC-96-24 Kendo M Wet (Exterior) Part Number: KMW-(length)-72HO-27K-F-FC-(finish)-(power feed info) <p>TAPE & CHANNEL (For Field Assembly)</p> <ul style="list-style-type: none"> Channel: KMC-(length)-F-(finish) ***Premium finishes available on request Static White: LL72SO-27K-(power feed info)-(length) Power Supply: PDCU-D-96-24 Warm Dim: LLWD68-19K-27K-(power feed info)-(length) Power Supply: PDC-96-24 Static White Wet: LL42WET-T-VHO-27K-(power feed info)-(length) Power Supply: PDCU-W-96-24
<p>SELECT LUMINAIRE SPECIFICATIONS</p> <p>Refer to Specification Sheet for More Information.</p> <div style="display: flex; align-items: center;">  <div style="margin-left: 20px;">  </div> </div> <p style="text-align: center;">KENDO M</p>			

INDIRECT MIRROR SURROUND

DETAIL	SECTION	RENDER	RECOMMENDED LUMINAIRE(S)
<p>Ambient accent. Best for powder rooms and water closets where lower light levels are desired. Supplementary downlight recommended.</p> 			<p>RECOMMENDED LUMINAIRE(S)</p> <ul style="list-style-type: none"> Kendo M Static White Part Number: KM-(length)-72SO-27K-(finish)- (power feed info) Power Supply: PDCU-D-96-24 Kendo M Warm Dim Part Number: KM-(length)-WD68SO-19K-27K-F-FC-(finish)-(power feed info) Power Supply: PDC-96-24 Kendo M Wet (Exterior) Part Number: KMW-(length)-72SO-27K-F-FC-(finish)-(power feed info) Power Supply: PDCU-W-96-24 <p>TAPE & CHANNEL (For Field Assembly)</p> <ul style="list-style-type: none"> Channel: KMC-(length)-F-(finish) ***Premium finishes available on request Static White: LL42-HO-27K- Power Supply: PDCU-D-96-24 Warm Dim: LLWD68-19K-27K-(power feed info)-(length) Power Supply: PDC-96-24 Static White Wet: LL42WET-T-VHO-27K-(power feed info)-(length) Power Supply: PDCU-W-96-24
<p>SELECT LUMINAIRE SPECIFICATIONS</p> <p>Refer to Specification Sheet for More Information.</p> <div style="display: flex; align-items: center;">  <div style="margin-left: 20px;">  </div> </div> <p style="text-align: center;">KENDO M</p>			

NOTES

- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
- 2) Additional lumen packages are available. Refer to specification sheets.
- 3) Silver, Black, White, Bronze finishes are standard; New premium finishes available, contact factory for more information.

- Title 24 / JA8
- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI



RECESSED MUD-IN



DETAIL

SECTION

RENDER

RECOMMENDED LUMINAIRE(S)


Sleek and Modern
Direct Illumination

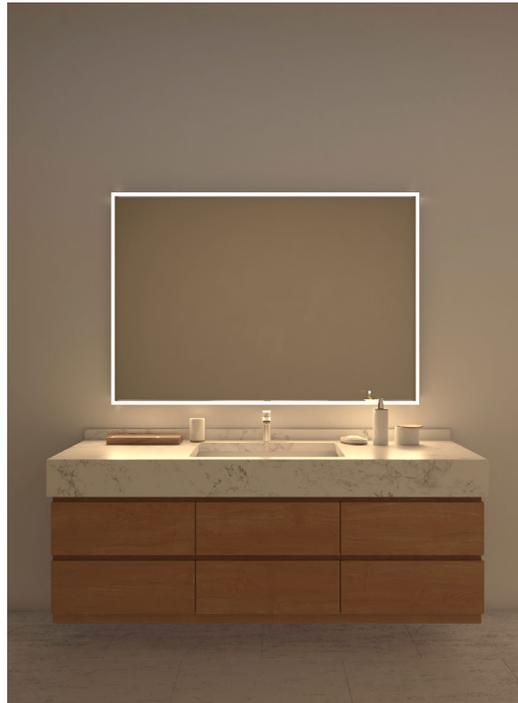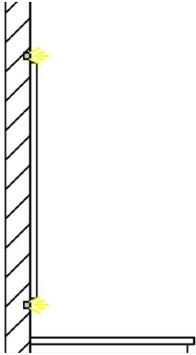

- LINII**
Part Number: LIN-(length)-72VHO-27K-F-GDS-
(power feed info)
Power Supply: PDCU-D-96-24
- LINII (FLAT CORNER)**
Part Number: LIN-(length)-F-GDS-LN-RN-
(power feed info)
Power Supply: Refer to Spec Sheet


TAPE & CHANNEL (For Field Assembly)

LED Tape: N/A
Extrusion: N/A
Power Supply: N/A

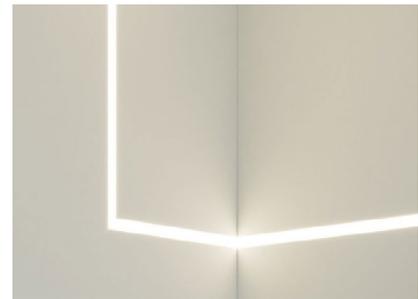

SELECT LUMINAIRE SPECIFICATIONS

Refer to Specification Sheet for More Information.



LINII

NOTES

- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
- 2) Additional lumen packages are available. Refer to specification sheets.
- 3) Silver, Black, White, Bronze finishes are standard; New premium finishes available, contact factory for more information.

- Title 24 / JA8
- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI






TOE-KICKS

Toe-kicks are the ultimate modern accent. Consider adding toe-kicks to bathrooms for a tasteful touch of flair in contemporary residences. Need something a little softer? Choose indirect toe-kicks — they even prevent glare on glossy bathroom floors and work perfectly for curved millwork pieces. For exterior water features or hardscapes, consider a grazing toe-kick to provide far-reaching low-level illumination without ruining the night landscape with harsh overhead lighting.


DIRECT

DETAIL SECTION

Bright and Direct. Traditional accent to provide low-level illumination.

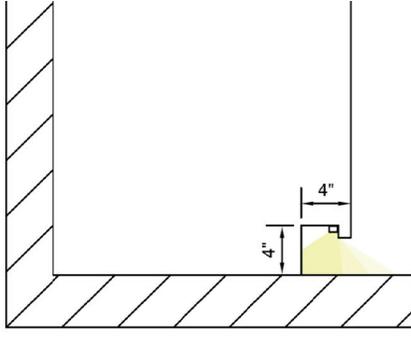

RENDER

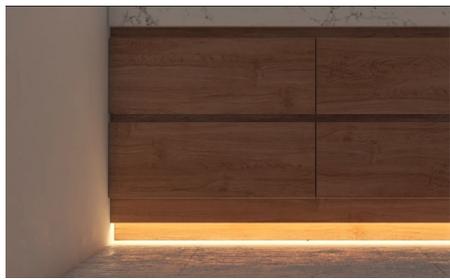


RECOMMENDED LUMINAIRE(S)

- Kendo S Static White**
Part Number: KS-(length)-72SO-27K-F-FC-SA-(power feed info)
Power Supply: PDCU-D-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-WD68SO-19K-27K-F-FC-SA-(power feed info)
Power Supply: PDC-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-72HO-27K-F-FC-SA-(power feed info)
Power Supply: PDCU-W-96-24

TAPE & CHANNEL (For Field Assembly)

- Channel:** KMC-(length)-F-SA
***Premium finishes available on request
- Static White:** LL42HO-27K-(power feed info)-(length)
Power Supply: PDCU-D-96-24
- Warm Dim:** LLWD68SO-19K-27K-(power feed info)-(length)
Power Supply: PDC-96-24
- Static White Wet:** LL42WET-T-VHO-27K-(power feed info)-(length)
Power Supply: PDCU-W-96-24




KENDO S

- NOTES**
- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
 - 2) Additional lumen packages are available. Refer to specification sheets.
 - 3) Silver, Black, White, Bronze finishes are standard; New premium finishes available, contact factory for more information.

INDIRECT

DETAIL SECTION

Soft and Indirect. Best for glossy floors to avoid unwanted reflection or for a curved millwork where straight runs are not

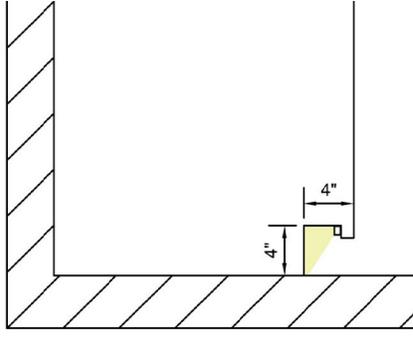

RENDER




RECOMMENDED LUMINAIRE(S)

- Kendo S Static White**
Part Number: KS-(length)-72SO-27K-F-FC-SA-(power feed info)
Power Supply: PDCU-D-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-WD68SO-19K-27K-F-FC-SA-(power feed info)
Power Supply: PDC-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-72HO-27K-F-FC-SA-(power feed info)
Power Supply: PDCU-W-96-24

TAPE & CHANNEL (For Field Assembly)

- Channel:** KMC-(length)-F-SA
***Premium finishes available on request
- Static White:** LL42HO-27K-(power feed info)-(length)
Power Supply: PDCU-D-96-24
- Warm Dim:** LLWD68SO-19K-27K-(power feed info)-(length)
Power Supply: PDC-96-24
- Static White Wet:** LL42WET-T-VHO-27K-(power feed info)-(length)
Power Supply: PDCU-W-96-24




KENDO S

- Title 24 / JA8
- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI

GRAZE

DETAIL SECTION

Dynamic and direct. For a modern and dramatic look.

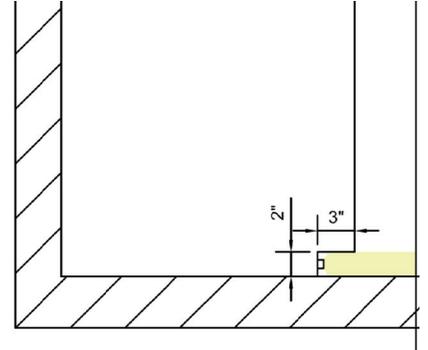

RENDER




RECOMMENDED LUMINAIRE(S)

- Kendo S Static White**
Part Number: KS-(length)-72SO-27K-F-FC-SA-(power feed info)
Power Supply: PDCU-D-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-WD68SO-19K-27K-F-FC-SA-(power feed info)
Power Supply: PDC-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-72HO-27K-F-FC-SA-(power feed info)
Power Supply: PDCU-W-96-24

TAPE & CHANNEL (For Field Assembly)

- Channel:** KMC-(length)-F-SA
***Premium finishes available on request
- Static White:** LL42HO-27K-(power feed info)-(length)
Power Supply: PDCU-D-96-24
- Warm Dim:** LLWD68SO-19K-27K-(power feed info)-(length)
Power Supply: PDC-96-24
- Static White Wet:** LL42WET-T-VHO-27K-(power feed info)-(length)
Power Supply: PDCU-W-96-24



KENDO S










SHOWER + BATH ACCENTS

Design spa-like bathrooms your clients will look forward to enjoying time and time again. Supplement vanity lighting and enhance self-care routines with dynamic accents, or eliminate downlights all together for a modern approach by using recessed linear lighting.

WET LOCATION WALL SHELF

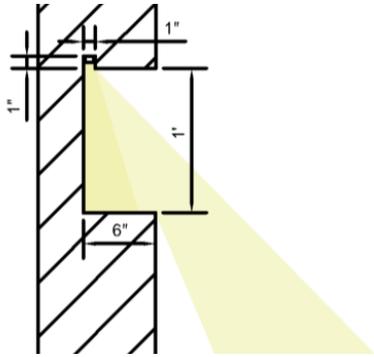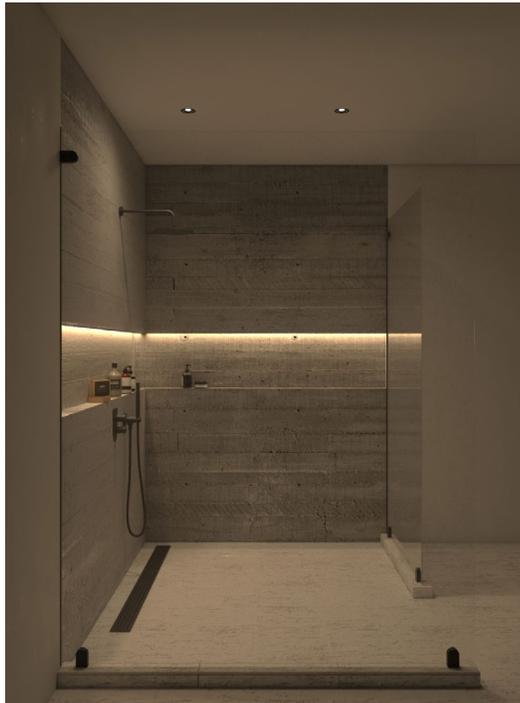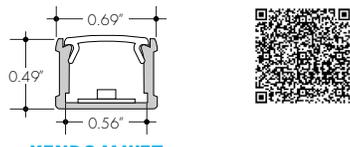DETAIL	SECTION	RENDER	RECOMMENDED LUMINAIRE(S)
<p>Consider adding a built-in wall shelf with accent lighting. Luminii has wet location LEDs for any application.</p> 			<p>RECOMMENDED LUMINAIRE(S)</p> <ul style="list-style-type: none"> Kendo M Static White Part Number: KM-(length)-72SO-27K-F-(power feed info) Power Supply: PDCU-D-96-24 Kendo M Warm Dim Part Number: KSW-(length)-WD68SO-19K-27K-F-(power feed info)-SA Power Supply: PDC-96-24 Kendo M Wet (Exterior) Part Number: KSW-(length)-72HO-27K-F-FC-SA-(power feed info) Power Supply: PDCU-W-96-24 <p>TAPE & CHANNEL (For Field Assembly)</p> <ul style="list-style-type: none"> Channel: KMC-(length)-F-SA Static White: LL42-HO-27K- Power Supply: PDCU-D-96-24 Warm Dim: LLWD68SO-19K-27K-(power feed info)-(length) Power Supply: PDC-96-24 Static White Wet: LLW42WET-T-VHO-27K-(power feed info)-(length) <p>Note: Wet is recommended for shower applications.</p>
<p>SELECT LUMINAIRE SPECIFICATIONS</p> <p>Refer to Specification Sheet for More Information.</p>   <p>KENDO M WET</p>			

WET LOCATION WALL POCKET WITH SHELVES

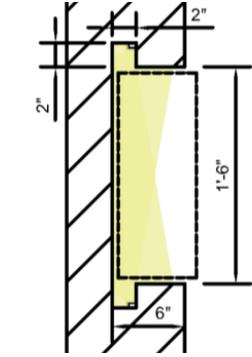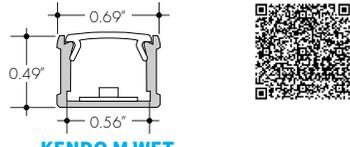DETAIL	SECTION	RENDER	RECOMMENDED LUMINAIRE(S)
<p>Consider adding a built-in wall pocket accent lighting. Luminii has wet location LEDs for any application.</p> 			<p>RECOMMENDED LUMINAIRE(S)</p> <ul style="list-style-type: none"> Kendo M Static White Part Number: KM-(length)-72SO-27K-F-(power feed info) Power Supply: PDCU-D-96-24 Kendo M Warm Dim Part Number: KMW-(length)-WD68SO-19K-27K-F-(power feed info)-SA Power Supply: PDC-96-24 Kendo M Wet (Exterior) Part Number: KSW-(length)-72HO-27K-F-FC-SA-(power feed info) Power Supply: PDCU-W-96-24 <p>TAPE & CHANNEL (For Field Assembly)</p> <ul style="list-style-type: none"> Channel: KMC-(length)-F-SA Static White: LL42-HO-27K- Power Supply: PDCU-D-96-24 Warm Dim: LLWD68SO-19K-27K-(power feed info)-(length) Power Supply: PDC-96-24 Static White Wet: LLW42WET-T-VHO-27K-(power feed info)-(length) Power Supply: PDCU-W-96-24 <p>Note: Wet is recommended for shower applications.</p>
<p>SELECT LUMINAIRE SPECIFICATIONS</p> <p>Refer to Specification Sheet for More Information.</p>   <p>KENDO M WET</p>			

NOTES

- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
- 2) Additional lumen packages are available. Refer to specification sheets.
- 3) Silver, Black, White, Bronze finishes are standard; New premium finishes available, contact factory for more information.

- Title 24 / JA8
- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI




RECESSED LINEAR MUD-IN (SHOWER)

DETAIL

Eliminate downlights with linear general illumination for a sleek modern look. Wall, Ceiling and Corners available.

SELECT LUMINAIRE SPECIFICATIONS

Refer to Specification Sheet for More Information.



RENDER



RECOMMENDED LUMINAIRE(S)

- LINII**
Part Number: LIN-(length)72HO-27K-F-GDS-(power feed info)
Power Supply: PDCU-D-96-24
- LINII (FLAT CORNER)**
Part Number: LIN-FC-72HO-27K-F-GDS-(power feed info)
Power Supply: Refer to Spec Sheet

TAPE & CHANNEL (For Field Assembly)

- LED Tape:** N/A
- Extrusion:** N/A
- Power Supply:** N/A




RECESSED LINEAR MUD-IN (BATH)

DETAIL

Eliminate downlights with linear general illumination for a sleek modern look. Wall, Ceiling and Corners available.

SELECT LUMINAIRE SPECIFICATIONS

Refer to Specification Sheet for More Information.



RENDER




RECOMMENDED LUMINAIRE(S)

- LINII**
Part Number: LIN-(length)72HO-27K-F-GDS-(power feed info)
Power Supply: PDCU-D-96-24
- LINII (INSIDE CORNER)**
Part Number: LIN-IC-72HO-27K-F-GDS-(power feed info)
Power Supply: Refer to Spec Sheet

TAPE & CHANNEL (For Field Assembly)

- LED Tape:** N/A
- Extrusion:** N/A
- Power Supply:** N/A

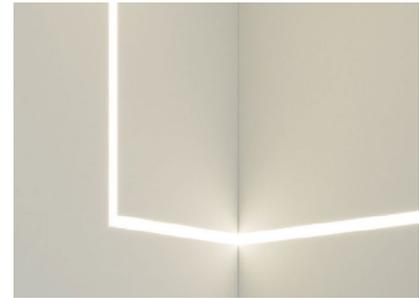

NOTES

- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
- 2) Additional lumen packages are available. Refer to specification sheets.
- 3) Silver, Black, White, Bronze finishes are standard; New premium finishes available, contact factory for more information.

- Title 24 / JA8
- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI



INGRADE LINEAR


DETAIL

Modern accent perfect for highlighting natural brick or stone finishes. Supplementary downlighting recommended. Consider Stenos or Rain downlights.



RECOMMENDED LUMINAIRE(S)

TRIDENT
 Part Number: 455-407-FH-MO-27-(finish)-BXX-(length)
 Power Supply: PDCU-D-96-24

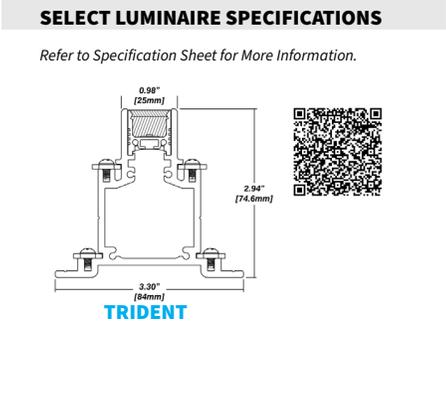

TAPE & CHANNEL (For Field Assembly)

LED Tape: N/A
Extrusion: N/A
Power Supply: N/A

INGRADE LINEAR


DETAIL

Modern accent perfect for accent natural brick or stone finishes. Supplementary downlighting recommended.



RECOMMENDED LUMINAIRE(S)

TRIDENT
 Part Number: 455-407-FH-MO-27-(finish)-BXX-(length)
 Power Supply: PDCU-D-96-24

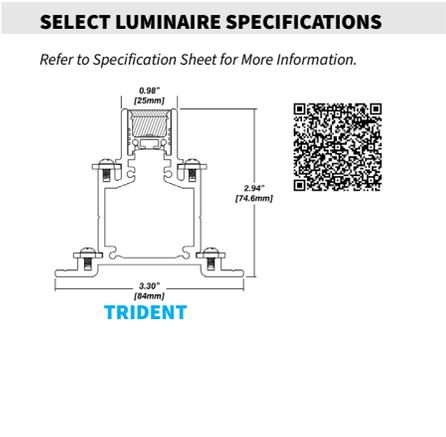

TAPE & CHANNEL (For Field Assembly)

LED Tape: N/A
Extrusion: N/A
Power Supply: N/A

- NOTES**
- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
 - 2) Additional lumen packages are available. Refer to specification sheets.
 - 3) Silver, Black, White, Bronze finishes are standard; New premium finishes available, contact factory for more information.

- Title 24 / JA8
- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI





Luminii part numbers and specifications are subject to change at any time.

Please refer to specification sheets on Luminii.com for the most up to date information or contact your local sales representative for more details.

Luminii Design Guides are intended to provide inspiration; please consult with your design professional, contractor, or electrician prior to purchase.

[Have additional questions? Luminii is here to help.](#)

Contact us anytime and we will help guide you to find the perfect products for any application.