

LUMINII HÔM

# Cove + Curtain Design Guide

# Make every home feel like HŌM

WITH TIPS FROM OUR COVE + CURTAIN DESIGN GUIDE.

Cove and curtain lighting can help set the mood in every room. Create a relaxing environment by indirectly lighting the space or accentuating a featured ceiling with cove lighting. Or, make a statement in gathering areas with curtain lighting that frames beautiful views.

Every moment spent at home should be accentuated with light. Our curated residential lighting collection from Luminii HŌM does just that, brightening every detail as intended. Dive into our Cove and Curtain Design Guide to inspire your next residential project. We look forward to helping you apply these lighting design principles to support your creative vision.



# Welcome HÖM

Elevate your home with architectural-grade lighting products by Luminii HÖM — all highly modifiable to fit your most unique spaces. Explore interactive and downloadable tools like design guides, the product configurator, hand selected product recommendations, and easy-to-follow spec sheets now at [luminiihom.com](https://www.luminiihom.com)






## COVE

An essential detail that creates soft indirect lighting either replacing or supplementing downlighting, accent featured ceilings, or add depth and contrast to a room.



Find the perfect detail for either traditional accents or modern ceilings which are typically free of downlights.


## INDIRECT ACCENT COVE

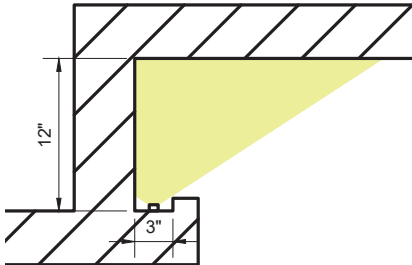DETAIL	RENDER
<p>Best used to wash vertical plane of the cove and provide soft glow.</p> 	

RECOMMENDED LUMINAIRES	SELECT LUMINAIRE SPECIFICATIONS
<p><b>KENDO M</b> KM-(length)-27K-SO-F-FC-SA-E-1 PSU - PDCU-D-96-24</p>	<p><i>Refer to Specification Sheet for More Information.</i></p>  <ul style="list-style-type: none"> <li>Dot Free w/ frosted lens</li> <li>5-Year Warranty</li> <li>24 VDC Class 2</li> <li>90+ CRI</li> </ul>
TAPE AND CHANNEL (FOR FIELD ASSEMBLY)	
<p>LED Tape - LL42-HO-27K-SL-NC-(length) Extrusion - KMC-144-F-SA PSU - PDCU-D-96-24</p>	<p><b>WARM DIM</b> LED Tape - LLWD68-19-27K-SL-NC-(length) Channel - KMC-144-F-SA PSU - PS010WD-96-24</p>

## FORWARD THROW COVE


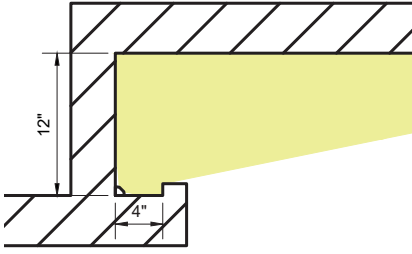
DETAIL	RENDER
<p>Best for tall coves to softly wash the ceiling above.</p> 	


RECOMMENDED LUMINAIRES	SELECT LUMINAIRE SPECIFICATIONS
<p><b>KENDO 45MR</b> K45MR-(length)-27K-SO-F-CB-SA-E-1 PSU - PDCU-D-96-24</p>	<p><i>Refer to Specification Sheet for More Information.</i></p>  <ul style="list-style-type: none"> <li>Dot Free w/ frosted lens</li> <li>5-Year Warranty</li> <li>24 VDC Class 2</li> <li>90+ CRI</li> </ul>
TAPE AND CHANNEL (FOR FIELD ASSEMBLY)	
<p>LED Tape - LL42-HO-27K-SL-NC-(length) Extrusion - KMC-144-F-SA PSU - PDCU-D-96-24</p>	<p><b>WARM DIM</b> LED Tape - LLWD68-19-27K-SL-NC-(length) Channel - KMC-144-F-SA PSU - PS010WD-96-24</p>

**NOTES**  
 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.  
 2) Additional lumen packages are available. Refer to specification sheets.  
 3) Silver, Black, White, Bronze finishes are standard; Custom available, contact factory for more information.






## GRAZING COVE
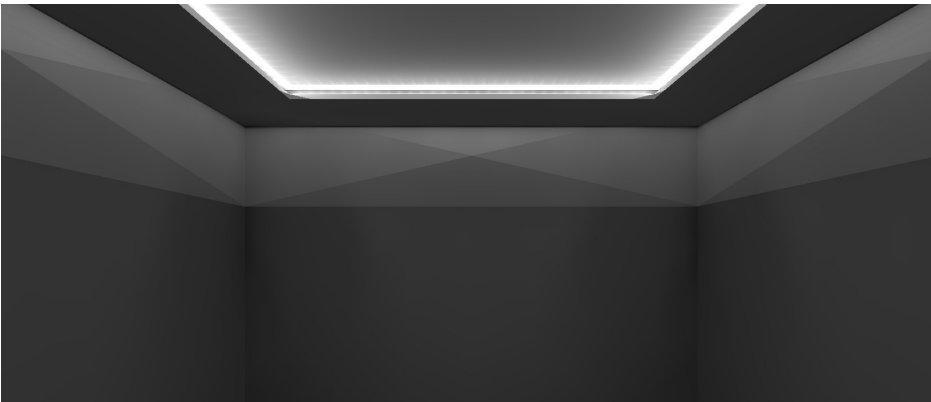
<p><b>DETAIL</b></p> <p>Best used in shallow ceilings and curved cove installations or when grazing is desired.</p> 	<p><b>RENDER</b></p> 
---	---

<p><b>RECOMMENDED LUMINAIRES</b></p> <p><b>KENDO M</b> KM-(length)-27K-SO-F-CB-SA-E-1 PSU - PDCU-D-96-24</p> <p><b>KURBA (FOR CURVES)</b> KBL-F-V-27K-EPF-EC-(length) PSU - PDCU-D-96-24</p>	<p><b>SELECT LUMINAIRE SPECIFICATIONS</b></p> <p><i>Refer to Specification Sheet for More Information.</i></p>  <p><b>KENDO M</b></p> <ul style="list-style-type: none"> <li>• Dot Free w/ frosted lens</li> <li>• 5-Year Warranty</li> <li>• 24 VDC Class 2</li> <li>• 90+ CRI</li> </ul>
<p><b>TAPE AND CHANNEL (FOR FIELD ASSEMBLY)</b></p>	
<p>LED Tape - LL42-HO-27K-SL-NC-(length) Extrusion - KMC-144-F-SA PSU - PDCU-D-96-24</p>	<p><b>WARM DIM</b> LED Tape - LLWD68-19-27K-SL-NC-(length) Channel - KMC-144-F-SA PSU - PS010WD-96-24</p>

## WALL MOUNTED COVE
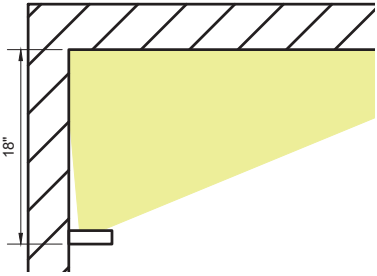
<p><b>DETAIL</b></p> <p>Cove replacement; mounted directly to wall. Eliminates the need to build an architectural cove.</p> 	<p><b>RENDER</b></p> 
---	---

<p><b>RECOMMENDED LUMINAIRES</b></p> <p><b>MCOVE</b> M-(length)-27K-HO-LT-WH PSU - PDCU-D-96-24</p> <p>Inside and Outside corners are available. Refer to specification sheet.</p>	<p><b>SELECT LUMINAIRE SPECIFICATIONS</b></p> <p><i>Refer to Specification Sheet for More Information.</i></p>  <p><b>MCOVE REC</b>      <b>MCOVE</b></p> <ul style="list-style-type: none"> <li>• Dot Free w/ frosted lens</li> <li>• 5-Year Warranty</li> <li>• 24 VDC Class 2</li> <li>• 90+ CRI</li> </ul>
<p><b>MCOVE REC</b> M-REC-(length)-27K-HO-LT-WH PSU - PDCU-D-96-24</p> <p>Inside and Outside corners are available. Refer to specification sheet.</p>	

**NOTES**  
 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.  
 2) Additional lumen packages are available. Refer to specification sheets.  
 3) Silver, Black, White, Bronze finishes are standard; Custom available, contact factory for more information.





### **CURTAIN / WALL POCKET**



Activate curtains and walls and provide a soft perimeter glow. Illuminating walls and vertical surfaces give the room a more welcoming feel and the illusion of a larger more open space.

Utilizing curtain and wall pockets to help reduce the need for overhead downlighting allows for decorative statement pieces shine.

## DIRECT CURTAIN / WALL POCKET

DETAIL	RENDER
--------	--------


Use a grazing optic for a dramatic and controlled look.

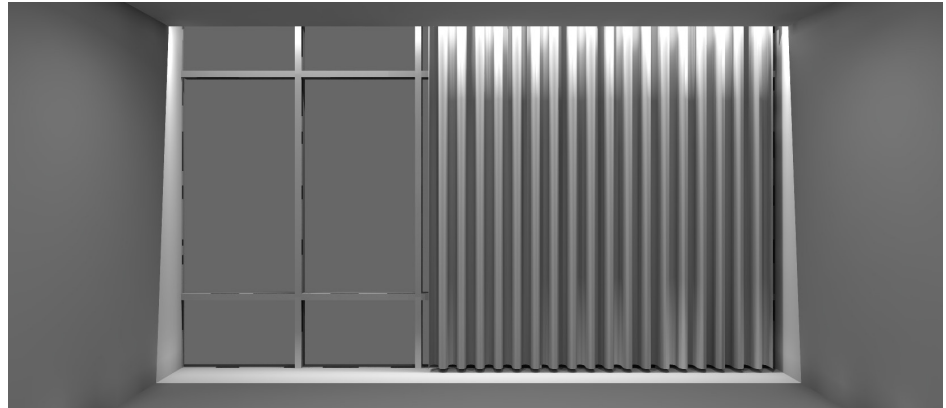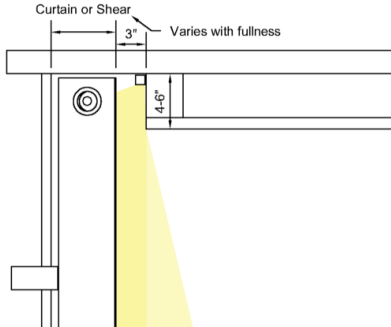

RECOMMENDED LUMINAIRES	SELECT LUMINAIRE SPECIFICATIONS
------------------------	---------------------------------

**KENDO M**  
 KM-(length)-27K-SO-G-FC-SA-E-1  
 PSU - PDCU-D-96-24

Refer to Specification Sheet for More Information.



- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI

**KENDO M**

### TAPE AND CHANNEL (FOR FIELD ASSEMBLY)



LED Tape - LL72-SO-27K-SL-NC-(length)  
 Extrusion - KMC-144-G-SA  
 PSU - PDCU-D-96-24

**WARM DIM**  
 LED Tape - LLWD68-19-27K-SL-NC-(length)  
 Channel - KMC-144-G-SA  
 PSU - PSD-96-24

## INDIRECT CURTAIN / WALL POCKET

DETAIL	RENDER
--------	--------


Soft accent. Works great when paired with coves.

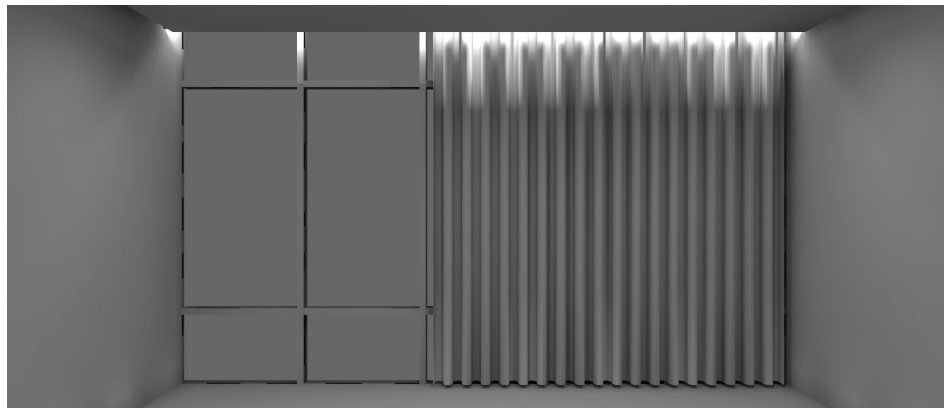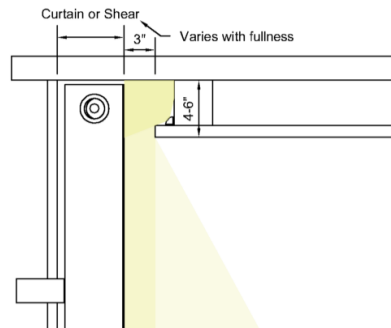

RECOMMENDED LUMINAIRES	SELECT LUMINAIRE SPECIFICATIONS
------------------------	---------------------------------

**KENDO M**  
 KM-(length)-27K-SO-F-FC-SA-E-1  
 PSU - PDCU-D-96-24

Refer to Specification Sheet for More Information.



- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI

**KENDO M**

### TAPE AND CHANNEL (FOR FIELD ASSEMBLY)

LED Tape - LL72-SO-27K-SL-NC-(length)  
 Extrusion - KMC-144-F-SA  
 PSU - PDCU-D-96-24

**WARM DIM**  
 LED Tape - LLWD68-19-27K-SL-NC-(length)  
 Channel - KMC-144-F-SA  
 PSU - PSD-96-24

- NOTES**
- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
  - 2) Additional lumen packages are available. Refer to specification sheets.
  - 3) Silver, Black, White, Bronze finishes are standard; Custom available, contact factory for more information.







## CURTAIN + SHEER DETAIL

**DETAIL** **RENDER**


For windows treatments with both sheer and blackout curtains.

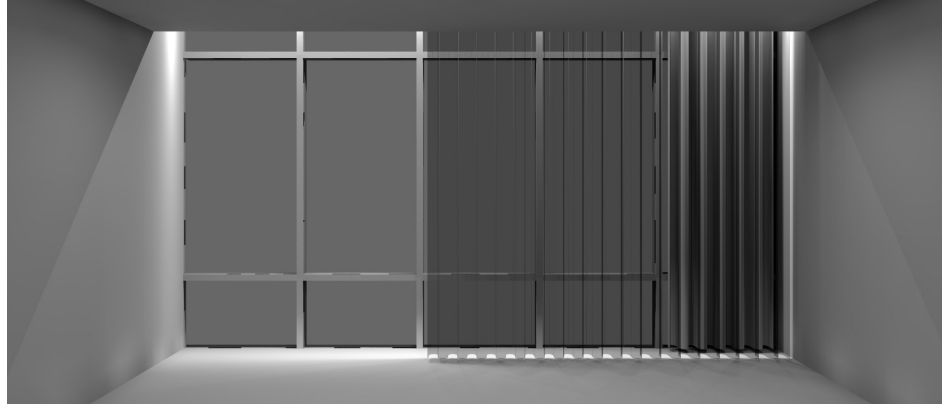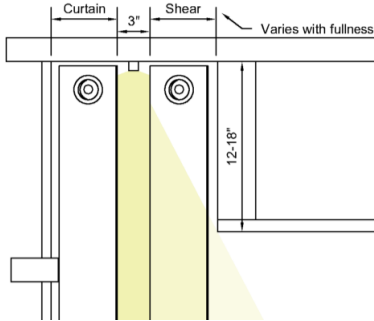

**RECOMMENDED LUMINAIRES** **SELECT LUMINAIRE SPECIFICATIONS**

**KENDO M**  
KM-(length)-27K-SO-G-FC-SA-E-1  
PSU - PDCU-D-96-24

Refer to Specification Sheet for More Information.



- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI

**KENDO M**

**TAPE AND CHANNEL (FOR FIELD ASSEMBLY)**



LED Tape - LL72-SO-27K-SL-NC-(length)  
Extrusion - KMC-144-G-SA  
PSU - PDCU-D-96-24

**WARM DIM**  
LED Tape - LLWD68-19-27K-SL-NC-(length)  
Channel - KMC-144-G-SA  
PSU - PSD-96-24

## DIRECT RECESSED LINEAR

**DETAIL** **RENDER**


For windows treatments with both sheer and blackout curtains.

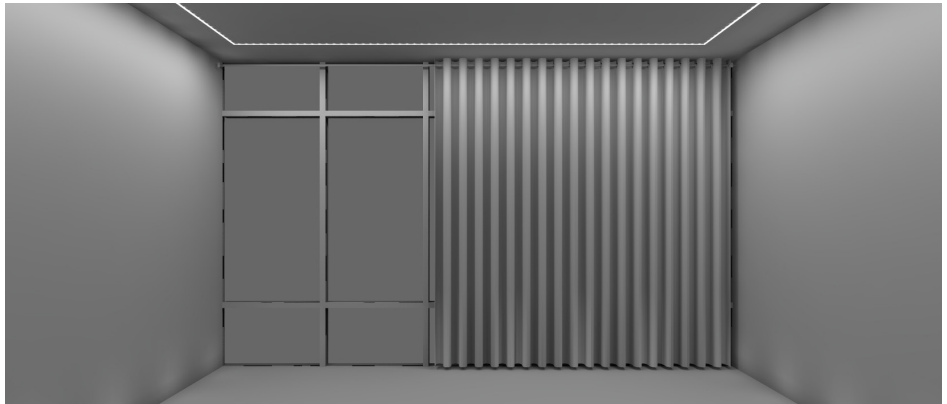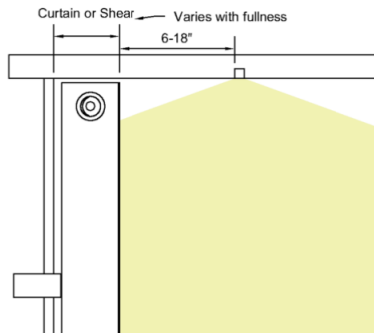

**RECOMMENDED LUMINAIRES** **SELECT LUMINAIRE SPECIFICATIONS**

**LINII**  
LIN-GDS-(length)-27K-MO-F  
PSU - PDCU-D-96-24

Refer to Specification Sheet for More Information.



- Dot Free w/ Frosted Lens
- 5-Year Warranty
- 24 VDC Class 2
- 90+ CRI

**LINII**

- NOTES**
- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
  - 2) Additional lumen packages are available. Refer to specification sheets.
  - 3) Silver, Black, White, Bronze finishes are standard; Custom available, contact factory for more information.





---

Luminii part numbers and specifications are subject to change at any time.

Please refer to specification sheets on [Luminii.com](http://Luminii.com) for the most up to date information or contact your local sales representative for more details.

Luminii Design Guides are intended to provide inspiration; please consult with your design professional, contractor, or electrician prior to purchase.

Have additional questions? [Luminii is here to help.](#)

Contact us anytime and we will help guide you to find the perfect products for any application.