



Features



- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 30' depending on output
- Suitable for grazer, surface mount, architectural reveals, handrail, and accent lighting applications.
- Approved for closet/storage space installation per NEC 410.16(A)(3) and 410.16(C)(5)
- Class two listed for damp locations.
- Dot free even illumination with frosted lens
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors.
- Warm Dim follows the incandescent dimming curve and is compatible with MLV, ELV, and Incandescent dimmers.
- RGB options offer balanced output across the color gamut and a true white with RGBW
- Dynamic White allows individual control of CCT and output
- Smart Pixel offerings allow for infinite color combinations with cascading and chasing effects.
- 5 year warranty



Finish Options (see page 2 for additional information)

- Silver Anodized
- Black
- Bronze
- White
- Matte Black
- Warm Nickel
- Aged Brass
- Polished Gold
- Chrome



Technical Information

| TYPE | Warm Dim | Dynamic White | | | RGBW | | RGB | | Pixel | |
|--|------------------|------------------|------------------|--------------|--------------|--------------|--------------|-----------------------|-----------------------|--|
| OUTPUT OPTIONS | WD68SO (19K-27K) | DW68SO (19K-27K) | DW68HO (27K-65K) | RGBW36SO | RGBW36HO | RGB42SO | RGB42HO | RGBWX18SO | RGBX18SO | |
| Lumens Output (all channels full on) | 197 lm/ft | 238 lm/ft | 286 lm/ft | 119 lm/ft | 198 lm/ft | 119 lm/ft | 175 lm/ft | 144 lm/ft | 95 lm/ft | |
| Average Power Consumption (for a 4" section) | 5.4 W/ft | 4.6 W/ft | 5.6 W/ft | 4 W/ft | 7.6 W/ft | 4.5 W/ft | 8.3 W/ft | 5.7 W/ft | 4.5 W/ft | |
| Efficacy | 36 lm/W | 52 lm/W | 51 lm/W | 30 lm/W | 26 lm/W | 26 lm/W | 21 lm/W | 25 lm/W | 21 lm/W | |
| Max Run Length (in series) | 20 ft | 32 ft | 12 ft | 26 ft | 13 ft | 28 ft | 13 ft | 20 ft | 30 ft | |
| Max Ambient Temperature* | 50°C [122°F] | 50°C [122°F] | | 50°C [122°F] | 45°C [113°F] | 50°C [122°F] | 45°C [113°F] | 50°C [122°F] | | |
| Control/Dimming Protocol | MLV, ELV, Inc. | 0-10V, DMX | | | DMX | | | SPI Protocol UCS 2904 | SPI Protocol UCS 2903 | |

*Max Ambient Temperature to maintain L70 of 50k+ hours. Exceeding Max Ambient Temperature may result in decreased life/output. Consult Technical Support for specific inquiries.


| Warm Dim (WD68) | | | | | Dynamic White (DW68) | | | | | RGBW (3000K) | | | | | Dominant Wavelength | | |
|-----------------|-----|----------------|----------------|----------------|----------------------|-----|----------------|----------------|----------------|----------------|------|----------------|----------------|----------------|---------------------|----------|--|
| TM-30 | | | | | TM-30 | | | | | TM-30 | | | | | Color | RGB/RGBW | |
| CCT | CRI | R _f | R _g | R ₉ | CCT | CRI | R _f | R _g | R ₉ | Tape | CRI | R _f | R _g | R ₉ | | | |
| 1900K | 96 | 92 | 96 | 94 | 2700K | 98 | 96 | 101 | 91 | RGBW36 | 95 | 93 | 106 | 84 | Red | 620nm | |
| 2400K | 97 | 96 | 103 | 98 | 2900K | 98 | 96 | 102 | 94 | RGBWX18 | 93 | 91 | 99 | 64 | Green | 525nm | |
| 2700K | 96 | 93 | 106 | 95 | 3500K | 97 | 94 | 105 | 97 | DW68 | | | | | Blue | 467nm | |
| | | | | | 4100K | 95 | 91 | 104 | 79 | CCT Multiplier | | | | | | | |
| | | | | | 4400K | 97 | 91 | 101 | 97 | 27K - 65K | 1.00 | | | | | | |
| | | | | | 6500K | 92 | 88 | 97 | 64 | 19K - 35K | 0.78 | | | | | | |

Ordering Code

| MODEL | LENGTH ¹ | OUTPUT | CCT | LENS ² | MOUNTING | FINISH ⁴ | POSITION | POWER FEED | ACCESSORIES |
|------------|---------------------------|--|--|-------------------------|--|--|---------------------------------|---|--|
| KM-Kendo M | 12"-120" 3" increments | WD68SO - Standard | 19K27K- 1900K- 2700K | GR - Narrow Beam Grazer | FC - Fixed Clip A - Adjustable Hinge Mounting FC45 - Fixed Clip, 45° MAG - Magnetic | SA - Silver Anodized BK - Black BZ - Bronze WH - White MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold ⁵ CH - Chrome ⁵ | E - End B - Back S - Side | 1 - 72" wire leads 1X2 - 72" wire leads at both ends 2 - 72" wire leads at one end and Quick Connect at other 3 - Single Quick Connect 4 - Dual Quick Connect | --- - N/A, leave blank BLS - Blade louver, Silver BLBK - Blade louver, Black BLWH - Blade louver, White GSS - Glare shield, Silver GSBK - Glare shield, Black GSWH - Glare shield, White |
| | 12"-144" 3" increments | DW68SO - Standard DW68HO - High | 19K35K- 1900K- 3500K 27K65K- 2700K- 6500K | | | | | | |
| | 12"-144" 2" increments | RGBW36SO - Standard RGBW36HO - High RGB42SO - Standard RGB42HO - High | CLR - Color | | | | | | |
| | 12"-144" 4" increments | RGBWX18SO - Standard RGBX18SO - Standard | PXSPI - Smart Pixel Control | | | | | | |

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.
 2 - Warm Dim and Dynamic White options can be used to comply with Title 24 JAS at max brightness depending on Lens selection, see multiplier charts to calculate specific efficacy.
 3 - Glare Shield and Blade Louvers not available with Raised Lens.
 4 - Non SA finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
 5 - Polished Gold finishes have a maximum fixture length of 48", and Chrome finishes have a maximum fixture length of 72".


Product Dimensions

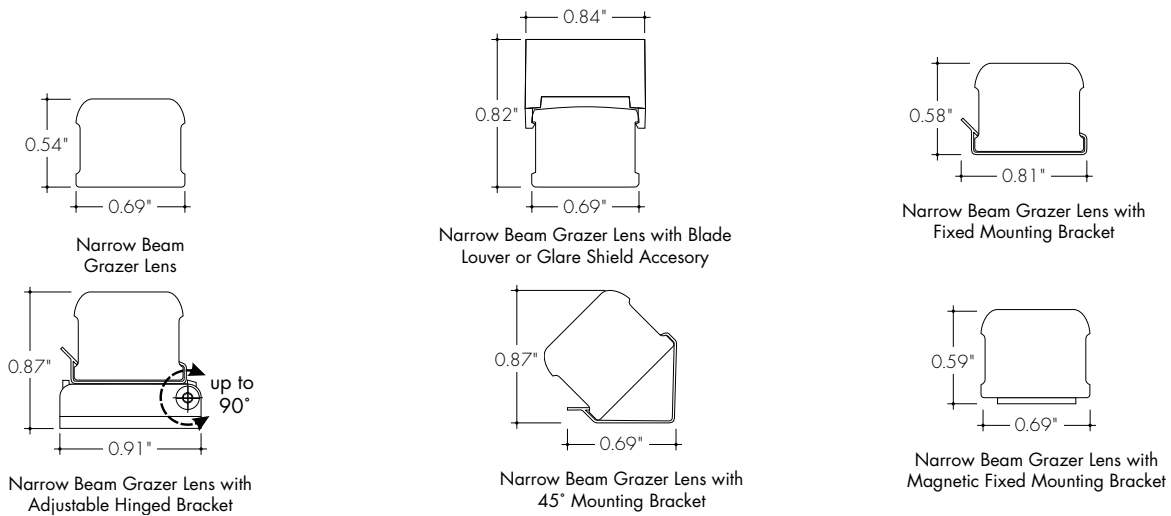

Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Silver Anodized finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

Silver Anodized Base



Silver Anodized is a soft silver with a clear finish.

Black Standard



Black is a true deep black with a glossy finish.

Bronze Standard




Bronze is a rich, dark brown with a satin finish.

White Standard




White is a polar bright white and field paintable.

Matte Black Premium



Matte Black is a dark, pitch-black with a soft flat finish.

Warm Nickel Premium




Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

Aged Brass Premium



Aged Brass is a deep brown shade with slightly golden undertones.

Polished Gold Premium



Polished Gold is bright and radiant for a brilliant finish.

Chrome Premium







Chrome is a highly reflective silver polish.





Powerfeeds and Connectors

Linking and Extension Cable Options





For use with Warm Dim (WD68):

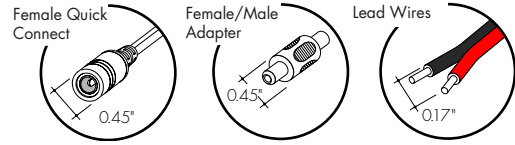





For use with Dynamic White (DW68), RGB Pixel (RGBX18) and RGBW Pixel (RGBWX18):

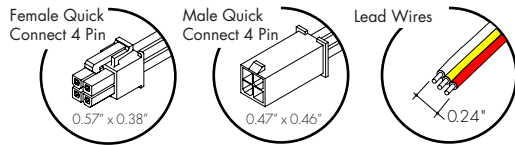









For use with RGB (RGB42):

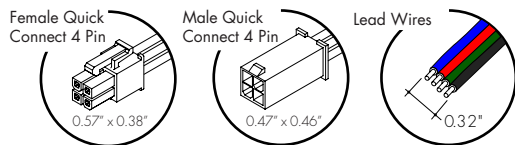

For use with RGBW (RGBW36):

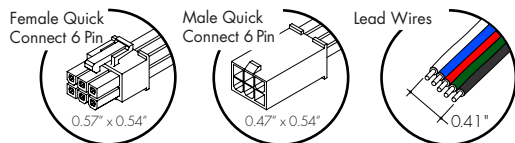


Powerfeeds Position/Type

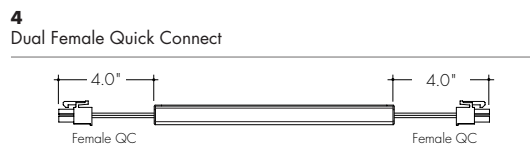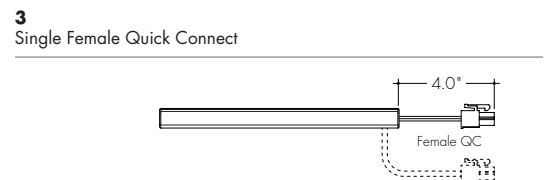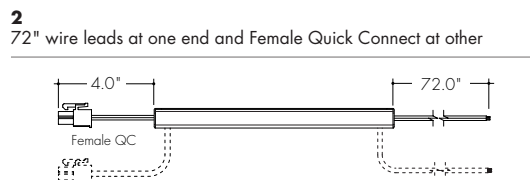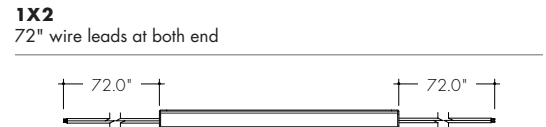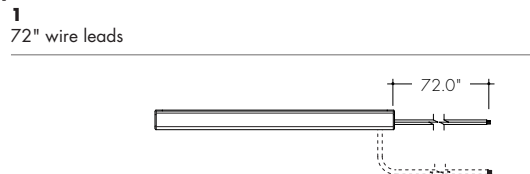


Side and Back feeds shown as dashed lines
All wires are 18 AWG unless otherwise specified

Sample Layout

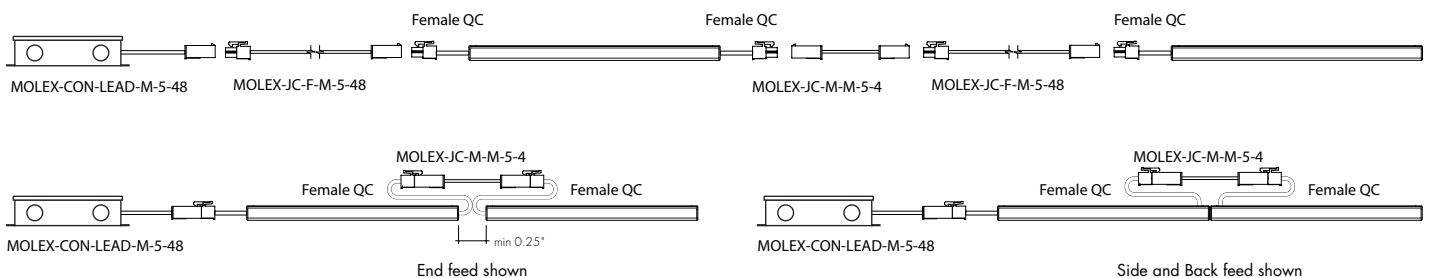

Lens Option / Light Transmission

| Output Options | Narrow Beam Grazer Lens | Grazer Lens, White Glare Shield | Grazer Lens, White Blade Louver |
|--------------------------------|-------------------------|---------------------------------|---------------------------------|
| WD68SO - 27K | CD | CD | CD |
| WD68SO - 19K | CD | CD | CD |
| DW68SO (All On) | CD | CD | CD |
| DW68SO (1-Channel) | CD | CD | CD |
| DW68HO (All On) | CD | CD | CD |
| DW68HO (1-Channel) | CD | CD | CD |
| RGBW36SO | CD | CD | CD |
| RGBW36HO | CD | CD | CD |
| RGB42SO | CD | CD | CD |
| RGB42HO | CD | CD | CD |
| RGBWX18SO | CD | CD | CD |
| RGBX18SO | CD | CD | CD |
| Transmission Percentage | 100% | 88% | 67% |




CD SD ND
 CD - Clear Dotting
 SD - Slight Dotting
 ND - No Dotting

Accessory Options


LV-GS-KMSC-24-XX

Glare Shield reduces glare at high angle, field cuttable. Also available with complete fixture, use ordering code **-GSXX**

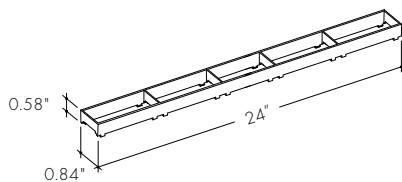


LV-BL-KMSC-24-XX

Blade Louver reduces glare at high angle in two directions. Also available with complete fixture, use ordering code **-BLXX**

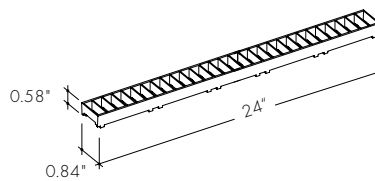

LVSP-4T-BK

Low Voltage, 4 Terminal Splice Box, Black

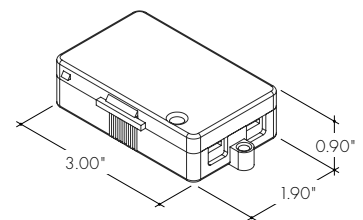

| XX | Color |
|----|--------|
| WH | White |
| BK | Black |
| SL | Silver |

Power Consumption

Tested at Full Power with PDC Series power supplies.

*For Back Feed add 4/16" (1/4") to Actual Length. Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

Warm Dim (WD68)

| Nominal Length (in) | Side and End Feed Actual Length* | Watts | Nominal Length (in) | Side and End Feed Actual Length* | Watts | Nominal Length (in) | Side and End Feed Actual Length* | Watts | Nominal Length (in) | Side and End Feed Actual Length* | Watts |
|---------------------|----------------------------------|-------|---------------------|----------------------------------|-------|---------------------|----------------------------------|-------|---------------------|----------------------------------|-------|
| | | SO | | | SO | | | SO | | | SO |
| 12 | 10 7/16 | 4.6 | 47 | — | — | 82 | 81 13/16 | 34.8 | 117 | 116 4/16 | 47.5 |
| 13 | 12 15/16 | 5.8 | 48 | 47 6/16 | 21.0 | 83 | — | — | 118 | — | — |
| 14 | — | — | 49 | — | — | 84 | — | — | 119 | 118 12/16 | 48.3 |
| 15 | — | — | 50 | 49 13/16 | 22.0 | 85 | 84 5/16 | 35.7 | 120 | — | — |
| 16 | 15 6/16 | 6.9 | 51 | — | — | 86 | — | — | 121 | — | — |
| 17 | — | — | 52 | — | — | 87 | 86 12/16 | 36.7 | 122 | 121 3/16 | 49.1 |
| 18 | 17 14/16 | 8.0 | 53 | 52 5/16 | 23.0 | 88 | — | — | 123 | — | — |
| 19 | — | — | 54 | — | — | 89 | — | — | 124 | 123 11/16 | 49.9 |
| 20 | — | — | 55 | 54 12/16 | 24.1 | 90 | 89 3/16 | 37.6 | 125 | — | — |
| 21 | 20 5/16 | 9.1 | 56 | — | — | 91 | — | — | 126 | — | — |
| 22 | — | — | 57 | — | — | 92 | 91 11/16 | 38.6 | 127 | 126 2/16 | 50.6 |
| 23 | 22 12/16 | 10.2 | 58 | 57 4/16 | 25.1 | 93 | — | — | 128 | — | — |
| 24 | — | — | 59 | — | — | 94 | — | — | 129 | 128 9/16 | 51.5 |
| 25 | — | — | 60 | 59 11/16 | 26.1 | 95 | 94 2/16 | 39.6 | 130 | — | — |
| 26 | 25 4/16 | 11.3 | 61 | — | — | 96 | — | — | 131 | — | — |
| 27 | — | — | 62 | — | — | 97 | 96 9/16 | 40.5 | 132 | 131 1/16 | 52.5 |
| 28 | 27 11/16 | 12.3 | 63 | 62 2/16 | 27.1 | 98 | — | — | 133 | — | — |
| 29 | — | — | 64 | — | — | 99 | — | — | 134 | 133 8/16 | 53.3 |
| 30 | — | — | 65 | 64 10/16 | 28.0 | 100 | 99 1/16 | 41.4 | 135 | — | — |
| 31 | 30 2/16 | 13.4 | 66 | — | — | 101 | — | — | 136 | 135 15/16 | 54.2 |
| 32 | — | — | 67 | — | — | 102 | 101 8/16 | 42.2 | 137 | — | — |
| 33 | 32 10/16 | 14.5 | 68 | 67 1/16 | 29.0 | 103 | — | — | 138 | — | — |
| 34 | — | — | 69 | — | — | 104 | 104 | 43.0 | 139 | 138 7/16 | 54.8 |
| 35 | — | — | 70 | 69 8/16 | 30.0 | 105 | — | — | 140 | — | — |
| 36 | 35 1/16 | 15.6 | 71 | — | — | 106 | — | — | 141 | 140 14/16 | 55.4 |
| 37 | — | — | 72 | 72 | 30.9 | 107 | 106 7/16 | 43.9 | 142 | — | — |
| 38 | 37 9/16 | 16.7 | 73 | — | — | 108 | — | — | 143 | — | — |
| 39 | — | — | 74 | — | — | 109 | 108 14/16 | 44.8 | 144 | 143 5/16 | 56.2 |
| 40 | 40 | 17.8 | 75 | 74 7/16 | 32.0 | 110 | — | — | — | — | — |
| 41 | — | — | 76 | — | — | 111 | — | — | — | — | — |
| 42 | — | — | 77 | 76 14/16 | 33.1 | 112 | 111 6/16 | 45.8 | — | — | — |
| 43 | 42 7/16 | 18.9 | 78 | — | — | 113 | — | — | — | — | — |
| 44 | — | — | 79 | — | — | 114 | 113 13/16 | 46.6 | — | — | — |
| 45 | 44 15/16 | 20.0 | 80 | 79 6/16 | 33.9 | 115 | — | — | — | — | — |
| 46 | — | — | 81 | — | — | 116 | — | — | — | — | — |

Power Consumption

Tested at Full Power with PDC Series power supplies.

*For Back Feed add 4/16" (1/4") to Actual Length. Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

Dynamic White (DW68)

| Nominal Length (in) | Side and End Feed Actual Length* | Watts | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | |
|---------------------|----------------------------------|-------|------|---------------------|----------------------------------|-------|------|---------------------|----------------------------------|-------|------|---------------------|----------------------------------|-------|------|
| | | SO | HO | | | SO | HO | | | SO | HO | | | SO | HO |
| 12 | 10 11/16 | 4.6 | 5.9 | 47 | - | - | - | 82 | - | - | - | 117 | 116 8/16 | 41.5 | 50.8 |
| 13 | - | - | - | 48 | 47 10/16 | 18.3 | 23.1 | 83 | 82 1/16 | 29.9 | 37.3 | 118 | - | - | - |
| 14 | 13 3/16 | 4.6 | 5.9 | 49 | - | - | - | 84 | - | - | - | 119 | 119 | 41.9 | 51.5 |
| 15 | - | - | - | 50 | - | - | - | 85 | 84 9/16 | 30.5 | 38.5 | 120 | - | - | - |
| 16 | 15 10/16 | 5.9 | 7.4 | 51 | 50 1/16 | 19.0 | 24.0 | 86 | - | - | - | 121 | - | - | - |
| 17 | - | - | - | 52 | - | - | - | 87 | 87 | 31.4 | 39.5 | 122 | 121 7/16 | 42.7 | 52.5 |
| 18 | - | - | - | 53 | 52 9/16 | 20.0 | 25.4 | 88 | - | - | - | 123 | - | - | - |
| 19 | 18 2/16 | 6.7 | 8.4 | 54 | - | - | - | 89 | - | - | - | 124 | 123 14/16 | 43.3 | 53.0 |
| 20 | - | - | - | 55 | - | - | - | 90 | 89 7/16 | 32.7 | 40.9 | 125 | - | - | - |
| 21 | 20 9/16 | 7.9 | 9.8 | 56 | 55 | 20.7 | 26.3 | 91 | - | - | - | 126 | - | - | - |
| 22 | - | - | - | 57 | - | - | - | 92 | 91 15/16 | 33.6 | 41.8 | 127 | 126 6/16 | 44.0 | 53.5 |
| 23 | - | - | - | 58 | 57 8/16 | 21.8 | 27.7 | 93 | - | - | - | 128 | - | - | - |
| 24 | 23 | 8.7 | 10.8 | 59 | - | - | - | 94 | - | - | - | 129 | 128 13/16 | 45.0 | 54.3 |
| 25 | - | - | - | 60 | 59 15/16 | 22.5 | 28.6 | 95 | 94 6/16 | 34.9 | 43.3 | 130 | - | - | - |
| 26 | 25 8/16 | 9.8 | 12.3 | 61 | - | - | - | 96 | - | - | - | 131 | - | - | - |
| 27 | - | - | - | 62 | - | - | - | 97 | 96 13/16 | 35.8 | 44.2 | 132 | 131 5/16 | 45.6 | 54.8 |
| 28 | 27 15/16 | 10.6 | 13.3 | 63 | 62 6/16 | 23.7 | 29.8 | 98 | - | - | - | 133 | - | - | - |
| 29 | - | - | - | 64 | - | - | - | 99 | - | - | - | 134 | 133 12/16 | 46.5 | 55.7 |
| 30 | - | - | - | 65 | 64 14/16 | 24.6 | 30.6 | 100 | 99 5/16 | 36.4 | 44.8 | 135 | - | - | - |
| 31 | 30 6/16 | 11.8 | 14.8 | 66 | - | - | - | 101 | - | - | - | 136 | - | - | - |
| 32 | - | - | - | 67 | - | - | - | 102 | 101 12/16 | 37.4 | 45.7 | 137 | 136 3/16 | 46.8 | 56.3 |
| 33 | 32 14/16 | 12.6 | 15.8 | 68 | 67 5/16 | 25.4 | 31.3 | 103 | - | - | - | 138 | - | - | - |
| 34 | - | - | - | 69 | - | - | - | 104 | - | - | - | 139 | 138 11/16 | 47.3 | 57.4 |
| 35 | - | - | - | 70 | 69 12/16 | 26.7 | 32.4 | 105 | 104 4/16 | 38.0 | 46.3 | 140 | - | - | - |
| 36 | 35 5/16 | 13.4 | 16.8 | 71 | - | - | - | 106 | - | - | - | 141 | - | - | - |
| 37 | - | - | - | 72 | - | - | - | 107 | 106 11/16 | 39.0 | 47.2 | 142 | 141 2/16 | 47.6 | 58.1 |
| 38 | 37 13/16 | 14.5 | 18.3 | 73 | 72 4/16 | 27.6 | 33.1 | 108 | - | - | - | 143 | - | - | - |
| 39 | - | - | - | 74 | - | - | - | 109 | - | - | - | 144 | 143 9/16 | 48.1 | 59.1 |
| 40 | - | - | - | 75 | 74 11/16 | 28.4 | 34.3 | 110 | 109 2/16 | 39.7 | 47.8 | | | | |
| 41 | 40 4/16 | 15.3 | 19.3 | 76 | - | - | - | 111 | - | - | - | | | | |
| 42 | - | - | - | 77 | - | - | - | 112 | 111 10/16 | 40.3 | 48.9 | | | | |
| 43 | 42 11/16 | 16.4 | 20.7 | 78 | 77 2/16 | 28.9 | 35.2 | 113 | - | - | - | | | | |
| 44 | - | - | - | 79 | - | - | - | 114 | - | - | - | | | | |
| 45 | - | - | - | 80 | 79 10/16 | 29.5 | 36.4 | 115 | 114 1/16 | 40.8 | 49.7 | | | | |
| 46 | 45 3/16 | 17.2 | 21.7 | 81 | - | - | - | 116 | - | - | - | | | | |

Power Consumption

Tested at Full Power with PDC Series power supplies.

*For Back Feed add 4/16" (1/4") to Actual Length. Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

RGB/RGBW (RGB42/RGBW36)

| Nominal Length (in) | Side and End Feed Actual Length* | Watts | | | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | | | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | | | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | | | |
|---------------------|----------------------------------|--------|------|-------|------|---------------------|----------------------------------|--------|------|-------|------|---------------------|----------------------------------|--------|------|-------|------|---------------------|----------------------------------|--------|------|-------|------|
| | | RGBW36 | | RGB42 | | | | RGBW36 | | RGB42 | | | | RGBW36 | | RGB42 | | | | RGBW36 | | RGB42 | |
| | | SO | HO | SO | HO | | | SO | HO | SO | HO | | | SO | HO | SO | HO | | | SO | HO | SO | HO |
| 12 | 10 11/16 | 4.0 | 7.3 | 4.4 | 8.6 | 47 | 46 2/16 | 14.4 | 27.5 | 16.8 | 31.3 | 82 | 81 9/16 | 26.1 | 49.6 | 29.4 | 53.8 | 117 | - | - | - | - | |
| 13 | 12 11/16 | 4.0 | 7.3 | 4.4 | 8.6 | 48 | - | - | - | - | - | 83 | - | - | - | - | - | 118 | 117 | 37.1 | 66.2 | 41.3 | 73.1 |
| 14 | - | - | - | - | - | 49 | 48 2/16 | 15.1 | 28.8 | 17.5 | 32.7 | 84 | 83 9/16 | 26.8 | 50.8 | 30.0 | 55.0 | 119 | 119 | 37.8 | 67.5 | 41.9 | 74.0 |
| 15 | 14 10/16 | 4.5 | 8.5 | 5.2 | 10.0 | 50 | - | - | - | - | - | 85 | - | - | - | - | - | 120 | - | - | - | - | |
| 16 | - | - | - | - | - | 51 | 50 1/16 | 15.8 | 30.0 | 18.3 | 34.0 | 86 | 85 8/16 | 27.4 | 51.9 | 30.7 | 56.2 | 121 | 120 15/16 | 38.6 | 68.7 | 42.6 | 74.9 |
| 17 | 16 10/16 | 5.1 | 9.7 | 5.9 | 11.3 | 52 | - | - | - | - | - | 87 | - | - | - | - | - | 122 | - | - | - | - | |
| 18 | - | - | - | - | - | 53 | 52 1/16 | 16.4 | 31.2 | 18.9 | 35.1 | 88 | 87 8/16 | 28.0 | 52.9 | 31.4 | 57.3 | 123 | 122 15/16 | 39.2 | 69.7 | 43.2 | 75.3 |
| 19 | 18 9/16 | 5.6 | 10.9 | 6.7 | 12.6 | 54 | - | - | - | - | - | 89 | - | - | - | - | - | 124 | - | - | - | - | |
| 20 | - | - | - | - | - | 55 | 54 | 17.0 | 32.4 | 19.6 | 36.3 | 90 | 89 7/16 | 28.6 | 53.8 | 32.2 | 58.4 | 125 | 124 14/16 | 39.7 | 70.7 | 43.8 | 75.7 |
| 21 | 20 9/16 | 6.2 | 12.1 | 7.4 | 13.9 | 56 | 56 | 17.6 | 33.5 | 20.3 | 37.5 | 91 | - | - | - | - | - | 126 | - | - | - | - | |
| 22 | - | - | - | - | - | 57 | - | - | - | - | - | 92 | 91 7/16 | 29.2 | 54.8 | 32.9 | 59.5 | 127 | 126 14/16 | 40.3 | 71.7 | 44.4 | 76.1 |
| 23 | 22 8/16 | 6.7 | 13.3 | 8.2 | 15.2 | 58 | 57 15/16 | 18.2 | 34.7 | 21.0 | 38.7 | 93 | - | - | - | - | - | 128 | - | - | - | - | |
| 24 | - | - | - | - | - | 59 | - | - | - | - | - | 94 | 93 6/16 | 29.9 | 55.8 | 33.6 | 60.5 | 129 | 128 13/16 | 40.8 | 72.8 | 45.0 | 76.6 |
| 25 | 24 8/16 | 7.3 | 14.5 | 8.9 | 16.6 | 60 | 59 15/16 | 18.9 | 35.9 | 21.7 | 39.8 | 95 | - | - | - | - | - | 130 | - | - | - | - | |
| 26 | - | - | - | - | - | 61 | - | - | - | - | - | 96 | 95 6/16 | 30.2 | 56.3 | 34.0 | 61.1 | 131 | 130 13/16 | 41.4 | 73.8 | 45.6 | 77.0 |
| 27 | 26 7/16 | 8.0 | 15.7 | 9.6 | 18.0 | 62 | 61 14/16 | 19.5 | 37.1 | 22.4 | 41.1 | 97 | - | - | - | - | - | 132 | - | - | - | - | |
| 28 | - | - | - | - | - | 63 | - | - | - | - | - | 98 | 97 5/16 | 30.8 | 57.2 | 34.7 | 62.2 | 133 | 132 12/16 | 41.9 | 74.8 | 46.3 | 77.4 |
| 29 | 28 7/16 | 8.6 | 17.0 | 10.4 | 19.4 | 64 | 63 14/16 | 20.2 | 38.4 | 23.2 | 42.4 | 99 | - | - | - | - | - | 134 | - | - | - | - | |
| 30 | - | - | - | - | - | 65 | - | - | - | - | - | 100 | 99 5/16 | 31.3 | 57.9 | 35.4 | 63.4 | 135 | 134 12/16 | 42.5 | 75.5 | 46.8 | 78.1 |
| 31 | 30 6/16 | 9.3 | 18.2 | 11.1 | 20.7 | 66 | 65 13/16 | 20.8 | 39.7 | 24.0 | 43.7 | 101 | - | - | - | - | - | 136 | - | - | - | - | |
| 32 | - | - | - | - | - | 67 | - | - | - | - | - | 102 | 101 4/16 | 31.9 | 58.6 | 36.0 | 64.7 | 137 | 136 11/16 | 43.1 | 76.3 | 47.3 | 78.8 |
| 33 | 32 6/16 | 9.7 | 18.8 | 11.5 | 21.4 | 68 | 67 13/16 | 21.5 | 41.0 | 24.7 | 45.1 | 103 | - | - | - | - | - | 138 | - | - | - | - | |
| 34 | - | - | - | - | - | 69 | - | - | - | - | - | 104 | 103 4/16 | 32.4 | 59.3 | 36.7 | 65.9 | 139 | 138 11/16 | 43.7 | 77.0 | 47.8 | 79.6 |
| 35 | 34 5/16 | 10.3 | 20.0 | 12.2 | 22.8 | 70 | 69 12/16 | 22.1 | 42.3 | 25.5 | 46.4 | 105 | - | - | - | - | - | 140 | - | - | - | - | |
| 36 | - | - | - | - | - | 71 | - | - | - | - | - | 106 | 105 3/16 | 32.9 | 60.0 | 37.3 | 67.2 | 141 | 140 10/16 | 44.3 | 77.7 | 48.3 | 80.3 |
| 37 | 36 5/16 | 11.0 | 21.3 | 13.0 | 24.2 | 72 | 71 12/16 | 22.8 | 43.5 | 26.3 | 47.8 | 107 | - | - | - | - | - | 142 | - | - | - | - | |
| 38 | - | - | - | - | - | 73 | - | - | - | - | - | 108 | 107 3/16 | 33.5 | 60.7 | 38.0 | 68.4 | 143 | 142 10/16 | 44.9 | 78.5 | 48.8 | 81.0 |
| 39 | 38 4/16 | 11.7 | 22.5 | 13.7 | 25.6 | 74 | 73 11/16 | 23.5 | 44.8 | 26.9 | 49.0 | 109 | - | - | - | - | - | 144 | - | - | - | - | |
| 40 | - | - | - | - | - | 75 | - | - | - | - | - | 110 | 109 2/16 | 34.0 | 61.4 | 38.6 | 69.7 | | | | | | |
| 41 | 40 4/16 | 12.4 | 23.8 | 14.5 | 27.0 | 76 | 75 11/16 | 24.1 | 46.0 | 27.6 | 50.2 | 111 | - | - | - | - | - | | | | | | |
| 42 | - | - | - | - | - | 77 | - | - | - | - | - | 112 | 111 2/16 | 34.8 | 62.6 | 39.3 | 70.5 | | | | | | |
| 43 | 42 3/16 | 13.1 | 25.0 | 15.2 | 28.5 | 78 | 77 10/16 | 24.8 | 47.2 | 28.2 | 51.4 | 113 | - | - | - | - | - | | | | | | |
| 44 | - | - | - | - | - | 79 | - | - | - | - | - | 114 | 113 1/16 | 35.6 | 63.8 | 39.9 | 71.4 | | | | | | |
| 45 | 44 3/16 | 13.8 | 26.3 | 16.0 | 29.9 | 80 | 79 10/16 | 25.4 | 48.4 | 28.8 | 52.6 | 115 | - | - | - | - | - | | | | | | |
| 46 | - | - | - | - | - | 81 | - | - | - | - | - | 116 | 115 1/16 | 36.3 | 65.0 | 40.6 | 72.3 | | | | | | |

Power Consumption

Tested at Full Power with PDC Series power supplies.

*For Back Feed add 4/16" (1/4") to Actual Length. Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

PIXEL

| Nominal Length (in) | Side and End Feed Actual Length* | Watts | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | | Nominal Length (in) | Side and End Feed Actual Length* | Watts | |
|---------------------|----------------------------------|--------|---------|---------------------|----------------------------------|--------|---------|---------------------|----------------------------------|--------|---------|---------------------|----------------------------------|--------|---------|
| | | RGBX18 | RGBWX18 | | | RGBX18 | RGBWX18 | | | RGBX18 | RGBWX18 | | | RGBX18 | RGBWX18 |
| | | SO | SO | | | SO | SO | | | SO | SO | | | SO | SO |
| 12 | 8 12/16 | 4.6 | 5.7 | 47 | - | - | - | 82 | - | - | - | 117 | - | - | - |
| 13 | 12 11/16 | 4.6 | 5.7 | 48 | - | - | - | 83 | - | - | - | 118 | - | - | - |
| 14 | - | - | - | 49 | 48 2/16 | 17.4 | 21.9 | 84 | 83 9/16 | 29.8 | 37.1 | 119 | 119 | 40.9 | 51.2 |
| 15 | - | - | - | 50 | - | - | - | 85 | - | - | - | 120 | - | - | - |
| 16 | - | - | - | 51 | - | - | - | 86 | - | - | - | 121 | - | - | - |
| 17 | 16 10/16 | 6.1 | 7.5 | 52 | - | - | - | 87 | - | - | - | 122 | - | - | - |
| 18 | - | - | - | 53 | 52 1/16 | 18.9 | 23.7 | 88 | 87 8/16 | 31.1 | 38.7 | 123 | 122 15/16 | 42.1 | 52.8 |
| 19 | - | - | - | 54 | - | - | - | 89 | - | - | - | 124 | - | - | - |
| 20 | - | - | - | 55 | - | - | - | 90 | - | - | - | 125 | - | - | - |
| 21 | 20 9/16 | 7.6 | 9.4 | 56 | 56 | 20.3 | 25.4 | 91 | - | - | - | 126 | - | - | - |
| 22 | - | - | - | 57 | - | - | - | 92 | 91 7/16 | 32.4 | 40.3 | 127 | 126 14/16 | 43.3 | 54.3 |
| 23 | - | - | - | 58 | - | - | - | 93 | - | - | - | 128 | - | - | - |
| 24 | - | - | - | 59 | - | - | - | 94 | - | - | - | 129 | - | - | - |
| 25 | 24 8/16 | 9.1 | 11.3 | 60 | 59 15/16 | 21.7 | 27.1 | 95 | - | - | - | 130 | - | - | - |
| 26 | - | - | - | 61 | - | - | - | 96 | 95 6/16 | 33.4 | 41.6 | 131 | 130 13/16 | 44.5 | 55.9 |
| 27 | - | - | - | 62 | - | - | - | 97 | - | - | - | 132 | - | - | - |
| 28 | - | - | - | 63 | - | - | - | 98 | - | - | - | 133 | - | - | - |
| 29 | 28 7/16 | 10.6 | 13.2 | 64 | 63 14/16 | 23.0 | 28.8 | 99 | - | - | - | 134 | - | - | - |
| 30 | - | - | - | 65 | - | - | - | 100 | 99 5/16 | 34.6 | 43.2 | 135 | 134 12/16 | 45.7 | 57.4 |
| 31 | - | - | - | 66 | - | - | - | 101 | - | - | - | 136 | - | - | - |
| 32 | - | - | - | 67 | - | - | - | 102 | - | - | - | 137 | - | - | - |
| 33 | 32 6/16 | 11.7 | 14.6 | 68 | 67 13/16 | 24.4 | 30.5 | 103 | - | - | - | 138 | - | - | - |
| 34 | - | - | - | 69 | - | - | - | 104 | 103 4/16 | 35.9 | 44.8 | 139 | 138 11/16 | 46.9 | 58.9 |
| 35 | - | - | - | 70 | - | - | - | 105 | - | - | - | 140 | - | - | - |
| 36 | - | - | - | 71 | - | - | - | 106 | - | - | - | 141 | - | - | - |
| 37 | 36 5/16 | 13.1 | 16.5 | 72 | 71 12/16 | 25.8 | 32.3 | 107 | - | - | - | 142 | - | - | - |
| 38 | - | - | - | 73 | - | - | - | 108 | 107 3/16 | 37.2 | 46.4 | 143 | 142 10/16 | 48.0 | 60.4 |
| 39 | - | - | - | 74 | - | - | - | 109 | - | - | - | 144 | - | - | - |
| 40 | - | - | - | 75 | - | - | - | 110 | - | - | - | - | - | - | - |
| 41 | 40 4/16 | 14.6 | 18.3 | 76 | 75 11/16 | 27.1 | 33.9 | 111 | - | - | - | - | - | - | - |
| 42 | - | - | - | 77 | - | - | - | 112 | 111 2/16 | 38.4 | 48.0 | - | - | - | - |
| 43 | - | - | - | 78 | - | - | - | 113 | - | - | - | - | - | - | - |
| 44 | - | - | - | 79 | - | - | - | 114 | - | - | - | - | - | - | - |
| 45 | 44 3/16 | 16.0 | 20.1 | 80 | 79 10/16 | 28.4 | 35.5 | 115 | - | - | - | - | - | - | - |
| 46 | - | - | - | 81 | - | - | - | 116 | 115 1/16 | 39.7 | 49.6 | - | - | - | - |

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

| Wattage [W] | Wire Length From Power Supply to Start of Run [ft] | | | | | | |
|-------------|--|--------|--------|--------|--------|--------|--------|
| | 12 AWG | 14 AWG | 16 AWG | 18 AWG | 20 AWG | 22 AWG | 24 AWG |
| 5 | 1088.2 | 684.4 | 430.3 | 270.6 | 170.2 | 107.1 | 67.3 |
| 10 | 544.1 | 342.2 | 215.1 | 135.3 | 85.1 | 53.5 | 33.7 |
| 15 | 362.7 | 228.1 | 143.4 | 90.2 | 56.7 | 35.7 | 22.4 |
| 20 | 272.0 | 171.1 | 107.6 | 67.7 | 42.6 | 26.8 | 16.8 |
| 25 | 217.6 | 136.9 | 86.1 | 54.1 | 34.0 | 21.4 | 13.5 |
| 30 | 181.4 | 114.1 | 71.7 | 45.1 | 28.4 | 17.8 | 11.2 |
| 35 | 155.5 | 97.8 | 61.5 | 38.7 | 24.3 | 15.3 | 9.6 |
| 40 | 136.0 | 85.5 | 53.8 | 33.8 | 21.3 | 13.4 | 8.4 |
| 45 | 120.9 | 76.0 | 47.8 | 30.1 | 18.9 | 11.9 | 7.5 |
| 50 | 108.8 | 68.4 | 43.0 | 27.1 | 17.0 | 10.7 | 6.7 |
| 55 | 98.9 | 62.2 | 39.1 | 24.6 | 15.5 | 9.7 | 6.1 |
| 60 | 90.7 | 57.0 | 35.9 | 22.6 | 14.2 | 8.9 | 5.6 |
| 65 | 83.7 | 52.6 | 33.1 | 20.8 | 13.1 | 8.2 | 5.2 |
| 70 | 77.7 | 48.9 | 30.7 | 19.3 | 12.2 | 7.6 | 4.8 |
| 75 | 72.5 | 45.6 | 28.7 | 18.0 | 11.3 | 7.1 | 4.5 |
| 80 | 68.0 | 42.8 | 26.9 | 16.9 | 10.6 | 6.7 | 4.2 |
| 85 | 64.0 | 40.3 | 25.3 | 15.9 | 10.0 | 6.3 | 4.0 |
| 90 | 60.5 | 38.0 | 23.9 | 15.0 | 9.5 | 5.9 | 3.7 |
| 96 | 56.7 | 35.6 | 22.4 | 14.1 | 8.9 | 5.6 | 3.5 |

Power Supplies


See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view luminii website for list of compatible dimmers.

For use with Warm Dim, WD68

Triac, MLV, & ELV Compatible Dimmers

| MODEL | POWER | OUTPUT |
|---------------------------|---------------|-------------|
| PDC - (IP20) Power Supply | 96 - 96 Watts | 24 - 24 VDC |

| MODELS | 96W |
|---------------|-------|
| Length | 8.25" |
| Width | 4.10" |
| Depth | 1.56" |

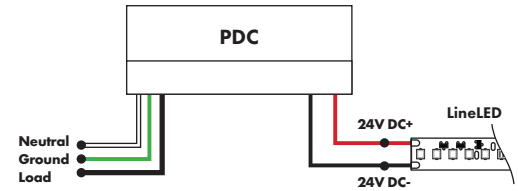


For use with Dynamic White, DW68

0-10V Warm Dimming 0% Power Supply 120VAC - 277VAC (for warm dimming of Dynamic White option)

| MODEL | POWER | OUTPUT |
|--|--------------|-------------|
| PS010WD - 0-10 Warm dim LED Power Supply | 96 - 96 Watt | 24 - 24 VDC |

Requires a 0-10V controller to work properly

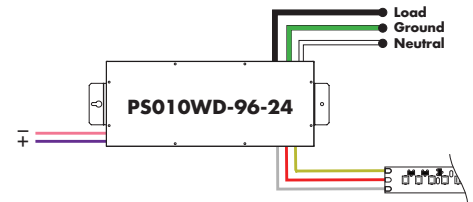


0-10V Tunable White 0% Dimming Power Supply 120VAC - 277VAC (for tunable white control of Dynamic White option)

| MODEL | POWER | OUTPUT |
|---|--------------|-------------|
| PS010TW - 0-10 Tunable White LED Driver | 96 - 96 Watt | 24 - 24 VDC |

Requires two 0-10V controllers to work properly


| MODELS | PS010TW |
|-----------------|---------|
| A Length | 14.40" |
| B Width | 2.60" |
| C Depth | 5.20" |

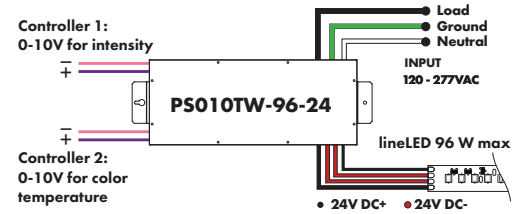

Customizable Dim to Warm or Variable White via 0 - 10V (for tunable white or warm dimming control of Dynamic option)

| MODEL | POWER | OUTPUT | CONTROL |
|------------------------|------------|-----------|---|
| PS010V-0-10 LED Driver | 96-96 Watt | 24-24 VDC | WW- Standard One Channel - Dim To Warm Curve W2C- Standard Two Channel - Dim 1: Intensity; Dim 2: CCT W21- Standard Two Channel - Dim 1: Warm Channel Intensity; Dim 2: Cool Channel Intensity W1X- Custom One Channel - Dim To Warm Curve W2X- Custom two Channel - Dim 1: Intensity; Dim 2: CCT |

Requires a 0-10V controller to work properly

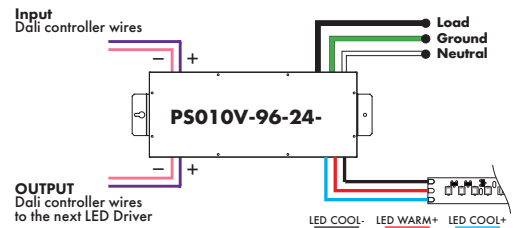


For use with RGB/RGBW/Pixel, RGB42/RGBW36/RGBX18/RGBWX18

Non-Dimming Power Supply 120VAC - 277VAC

| MODEL | POWER | OUTPUT | DIMMING | LOCATION |
|------------------|--------------|-------------|------------------|------------------|
| PSV - PSV Series | 96 - 96 Watt | 24 - 24 VDC | ND - Non Dimming | D - Dry location |

Requires a controller and a decoder to work properly

| MODELS | 96W |
|-----------------|--------|
| A Length | 14.40" |
| B Width | 5.20" |
| Depth | 2.60" |

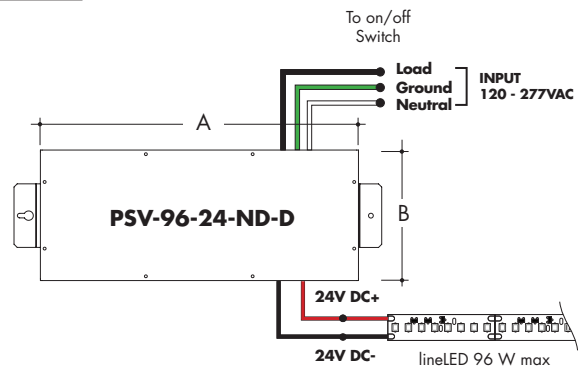

Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.



For use with RGB/RGBW, RGB42/RGBW36 or with Dynamic White, DW68

DMX 0% Dimming Power Supplies 120VAC - 277VAC

| MODEL | POWER | OUTPUT |
|--|------------------------------------|-----------|
| PSDMX-DMX Power Supply dims down to 0% | 96 - 96 Watt 3X96 - 3 X 96 Watt | 24-24 VDC |

Features eldoLED's LINEARdrive configurable dimmable drivers.


DDMX-RGBW DMX Decoder not required when purchasing this power supply.

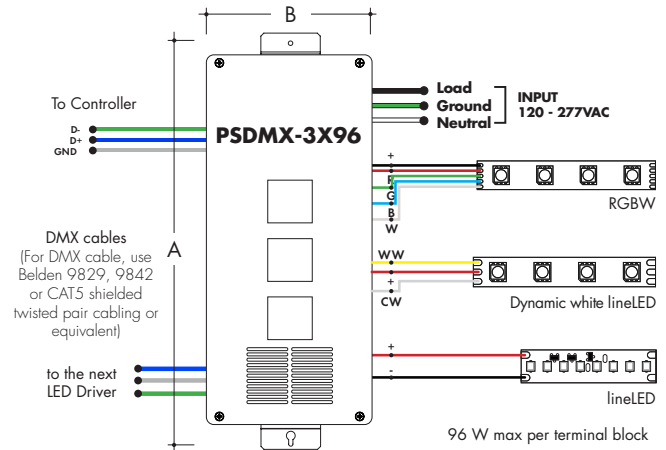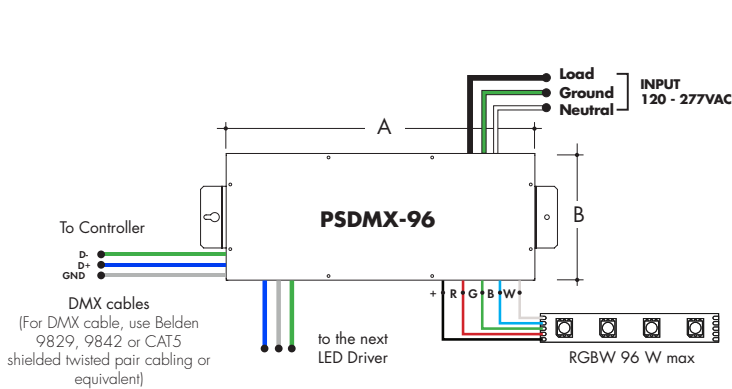

| MODELS | 96W | 3X96 |
|-----------------|--------|--------|
| A Length | 14.40" | 15.75" |
| B Width | 5.20" | 6.62" |
| Depth | 2.60" | 4.95" |

DMX-1Z-RGBW, DMX-3Z-RGBW

RGBW LED 1 or 3 Zone Controller

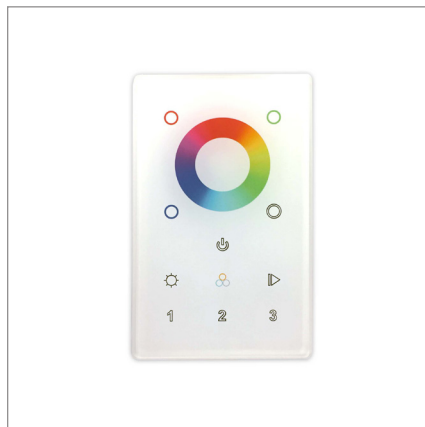

ORDERING CODE

| MODEL | ZONES | COLOR |
|----------------------|----------------------------------|----------------------------------|
| DMX - DMX Controller | 3Z - Three Zone 1Z - One Zone | RGBW - Red, Green, Blue, & White |

DMX /Wireless RGB-W wall-mount controller controls DMX lighting fixtures, wireless control of RGB-W lighting fixture or use both simultaneously. Fits in any standard US switch box. Includes all the outputs in the back of the controller.

Control brightness levels with a single touch, personalize and memorize 3 different scenes, and even create 3 variations of white.

Features

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- 65,000 Color Options, Dimming and Speed Control
- Memory Function
- 50 Foot Wireless Range
- Easily Fits Standard US Switch Boxes
- Touch Sensitive Glass Surface
- Includes 10 Built in Programs, or Create and Play Your Own

Operating Voltage


12 - 24V DC

Color Parameters

- Brightness
- Saturation
- Primary colors
- Fading
- Color changing speed

Touch DMX Controller

Touchscreen digital LED controller



MODEL

TSDMX-E

TSDMX-E - Touchscreen DMX controller

Programmable advanced DMX512 lighting controller featuring a touch-screen interface. Operates as stand alone controller or integrated with most architectural lighting control systems. Can controller endless DMX512 enabled devices.

Mounts to standard single or dual gang wall box with the included power supply inside the junction box. Terminal block design for power and data connections.

Features

- Sleek glass design which sits 0.43" from the wall
- Graphical color display to show selected environment
- Color/dimmer/speed palette
- Color temperature mixing
- Touch sensitive buttons. No mechanical parts
- Touch sensitive wheel allows for accurate color selection
- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- 1024 DMX channels. Control 340 RGB fixtures
- USB & Ethernet connectivity for programming and control

Power Supply

7 VDC (included)

Programmability

PC, Mac, Tablet, Smartphone

Output Signal


DMX512 (1024 channels)

Color Parameters

- Brightness
- Saturation
- Speed of color changing sequence
- Fading / dimming / brightness

DMX Decoder

DMX signal to RGBW decoder (required to operate DMX controller)

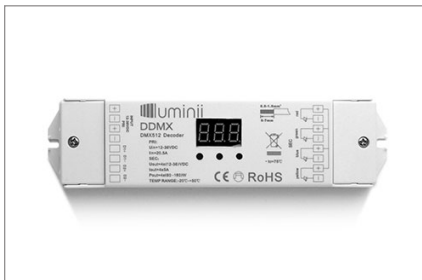

ORDERING CODE

MODEL

DDMX-RGBW

DDMX-RGBW - DMX decoder

Translates controller DMX512 programs for RGB and white LED strips.

Unique DMX address for the decoder can be set easily and displayed by the numeric display on the case. Changing and resetting the DMX address requires manual input.

Use power repeater to expand output.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range

from -4°F to +122°F in case

Smart Pixel Decoder

SPI signal to DMX signal decoder



Model

SR-DMX-SPI

SR-DMX-SPI - Smart Pixel Decoder

The SR-DMX-SPI is a smart LED pixel decoder that controls RGB/RGBW pixel LED strips with SPI signal. Designed with an OLED backlit panel, the pixel controller allows for easy configuration of most settings.

Four push buttons are available for control of the LED functions.

*For pixel only.

Features

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- SPI signal output for RGB/RGBW pixel light control
- DMX512 controllable and RF/WIFI remote controllable
- Capable of addressing up to 1020 RGB pixels & 765 RGB pixels
- OLED panel allows for easy configuration

Operating Voltage

12 - 36V DC

Power capacity

up to 96W at 24V

Operating temperature range

from -4°F to +122°F in case