

Features

Kurba Max is a dot free direct view, highly versatile, energy efficient and flexible LED strip suitable for outdoor wet locations capable of horizontal/side bends and vertical/top bends with a 8" bending radius. The silicone material offers excellent heat, weather, UV, and solvent resistance and has a special coating to repel dust and dirt accumulation.

Applications

Indoor/Outdoor dry & wet location

Average Life (L70)

50,000 hours

Materials

Silicone for red list approved, as well as heat, weather, UV, and solvent resistance

Approvals


24VDC Class 2 wet listed, IP68

Dimming

Dimable down to 1%. Dot Free even illumination. Also available with Black Lens

Warranty

3 years

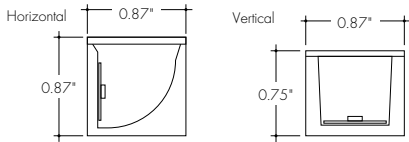

Finish Options (see page 2 for additional information)

Base White




Technical Information

Bending Direction	Horizontal		Vertical		CCT INFO / LUMEN MULTIPLIER	
	43SO	44HO	43SO	44HO	Color Temperature	Multiplier (ref. 3000K)
Output					2200K	0.93
Light Output at 3000K	335 lm/ft	437 lm/ft	396 lm/ft	536 lm/ft	2400K	1.00
Average Power Consumption at 4'	5.03 W/ft	5.03 W/ft	5.03 W/ft	5.03 W/ft	2700K	1.00
Efficacy	67 lm/W	87 lm/W	79 lm/W	107 lm/W	3000K	1.02
Ordering Increment	1.97"	2.19"	1.97"	2.19"	3500K	1.02
Maximum Run Length (In Series)	19'	19'	19'	19'	4000K	1.01
Operating Temperature Range	-40°F to 113°F	-40°F to 113°F	-40°F to 113°F	-40°F to 113°F	Note: 80 CRI	

Constraints


Horizontal Bend Direction

Bend LED in these positions only to avoid damage

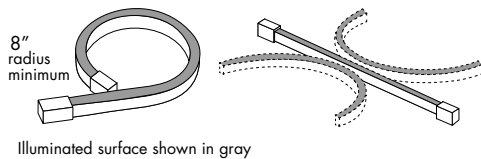


Horizontal Prohibited Bends

Twisting or bending LED in these positions will cause damage




Vertical Bend Direction

Bend LED in these positions only to avoid damage

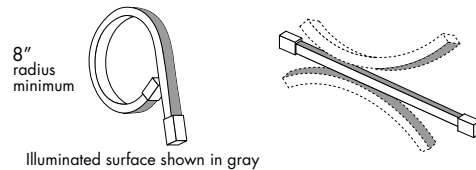

Vertical Prohibited Bends

Twisting or bending LED in these positions will cause damage

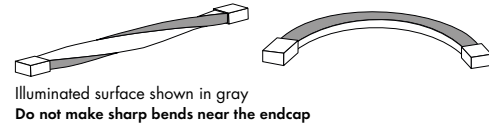

Ordering Code

MODEL	RATING ¹	BEND DIRECTION	LENGTH	OUTPUT ¹	CCT	LENS	MOUNTING	FINISH	FEED POSITION LEFT	FEED POSITION RIGHT
KBX-Kurba Max	W-Wet	HB-Horizontal Bending VB-Vertical Bending	SEE PCC CHART ON PAGES 7-8	43SO-Standard 44HO-High	22K-2200K 27K-2700K 30K-3000K 35K-3500K 40K-4000K	SF-Silicone Frosted	NA-See Page 6 for orderable mounting accessories	WH-White	INJECTION MOLD IME-End Feed 1 IMB-Back Feed 1 IMSA-Side 1 Feed IMSB-Side 2 Feed ² NPF-No Power Feed ³	INJECTION MOLD IME-End Feed 1 IMB-Back Feed 1 IMSA-Side 1 Feed IMSB-Side 2 Feed ² NPF-No Power Feed ³


¹ - Title 24 JA8 compliant depending on Output, CCT, and lens selections. See Technical Information and Lens Transmission charts to calculate specific efficacies.

² - IMSB - Side 2 Feed not available with HB - Horizontal Bending
³ - NPF-NPF for Feed Position 1&2 is not a valid configuration option

Feeds come with 90° wire leads

Powerfeeds and Connectors

Power Feed Position Options and Orientation

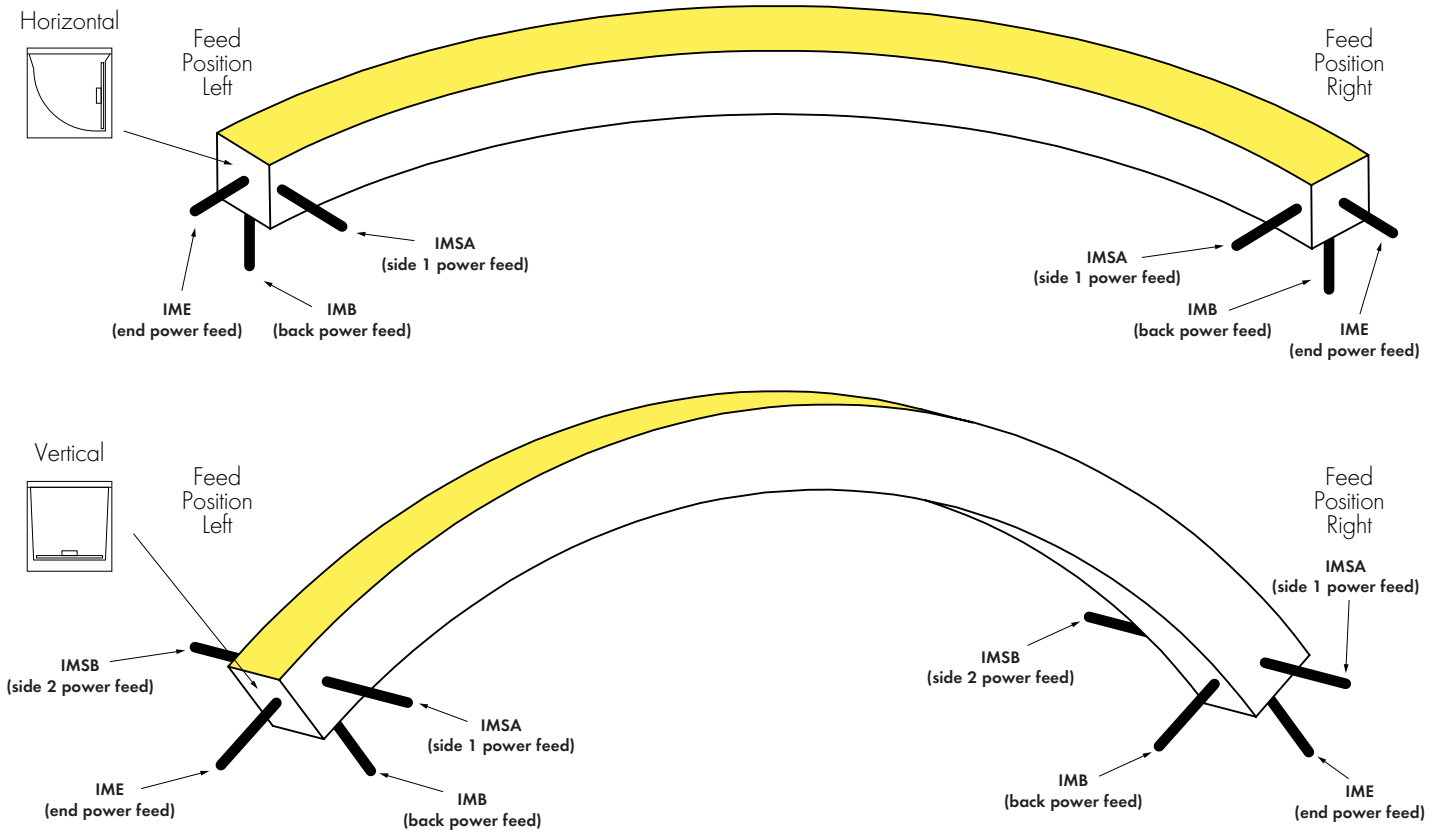


NOTE: IMSB - Side 2 Feed not available with HB - Horizontal Bending

Powerfeed Options

Horizontal


END CONNECTOR

Injection-molded End Connector
-IME

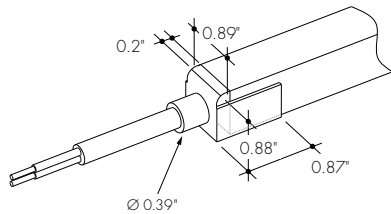


BACK CONNECTOR

Injection-molded Back Connector
-IMB




SIDE CONNECTOR

Injection-molded Side Connector
-IMSA




ENDCAP (NO CONNECTOR)

Injection-molded Cap (No Connector)
-NPF



ANTI-WICKING FERRULE


Included on every power feed wire



Vertical


END CONNECTOR

Injection-molded End Connector
-IME

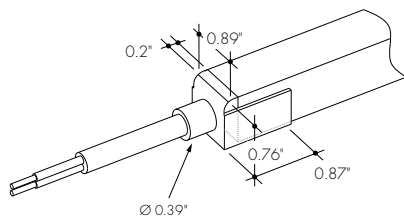


BACK CONNECTOR

Injection-molded Back Connector
-IMB




SIDE CONNECTOR

Injection-molded Side Connector
-IMSA and -IMSB




ENDCAP (NO CONNECTOR)

Injection-molded Cap (No Connector)
-NPF



ANTI-WICKING FERRULE


Included on every power feed wire





Product Dimensions

Horizontal



Kurba Max Cross Sections





Example Feed Position
IME - NPF
End Feed 1 to
No Power Feed

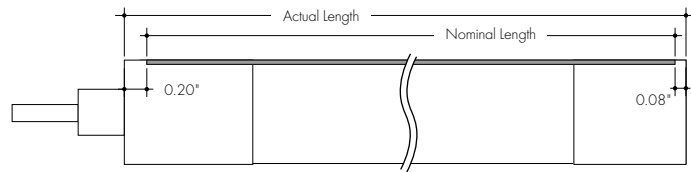



Example Feed Position
IMSA - NPF
Side 1 Feed to
No Power Feed

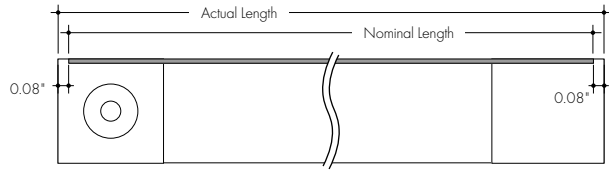

Example Feed Position
IMB - NPF
Back Feed 1 to
No Power Feed

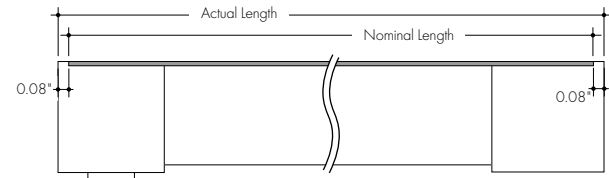


Example Feed Position
IME - IME
End Feed 1 and
End Feed 1

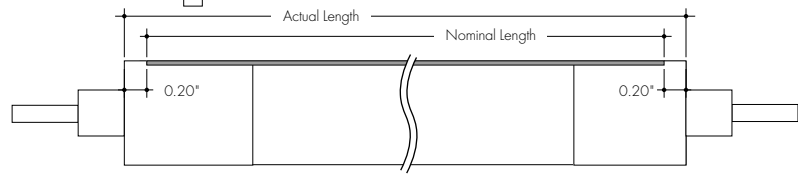



Vertical



Kurba Max Cross Sections





Example Feed Position
IME - NPF
End Feed 1 to
No Power Feed

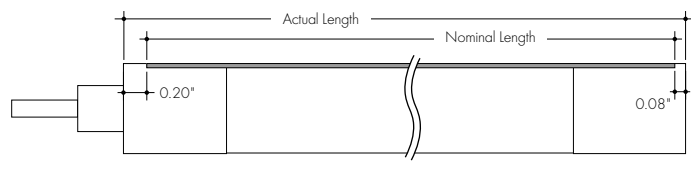



Example Feed Position
IMSA - NPF
Side 1 Feed to
No Power Feed

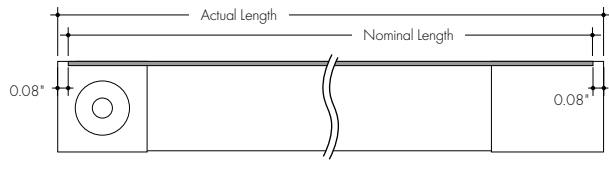

Example Feed Position
IMB - NPF
Back Feed 1 to
No Power Feed

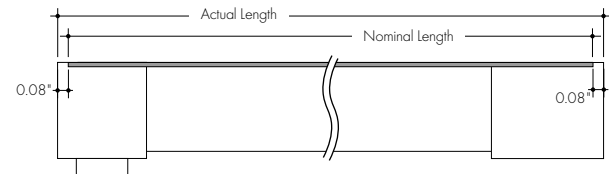


Example Feed Position
IME - IME
End Feed 1 and
End Feed 1

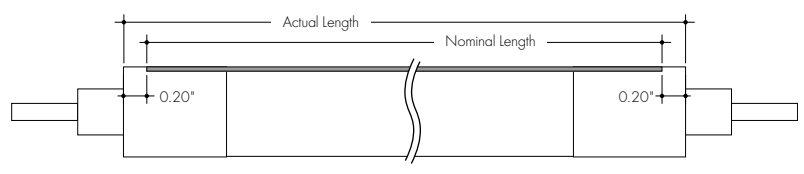

Finish Options

- A wide variety of finish options allowing complete customization of style and aesthetic.

White Base



Kurba's base finish is a crisp white which brings a timeless, clean aesthetic that brightens and enhances any space

Light Transmission and Dotting

Output Options	Lens/Accessory
	Silicone Frosted/ White Finish
43SO-HB	ND
44HO-HB	ND
43SO-VB	ND
44HO-HB	ND
Transmission Percentage	100%




CD - Clear Dotting
SD - Slight Dotting
ND - No Dotting

Photometry

KBX-W-HB-48-44HO-30K-SF-NA-WH

Kurba Max, Horizontal Bend, 4ft, 3000K, 44HO output, Silicone Frosted Lens

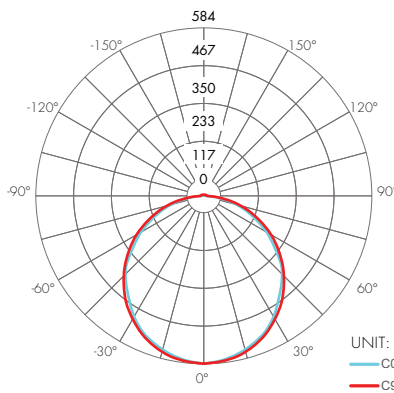

Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	452	25.9%
0-40	622	35.6%
0-60	1318	75.4%
0-90	1720	98.4%
Total	1748	100.0%


Beam Angle



UNIT: CD
— C0/180
— C90/270

KBX-W-VB-48-44HO-30K-SF-NA-WH

Kurba Max, Vertical Bend, 4ft, 3000K, 44HO output, Silicone Frosted Lens

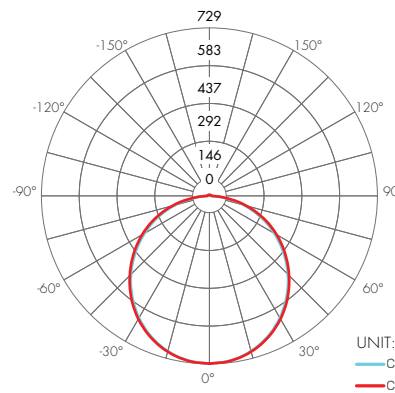

Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	562	26.2%
0-40	772	36.0%
0-60	1629	76.0%
0-90	2120	98.9%
Total	2144	100.0%

Beam Angle





UNIT: CD
— C0/180
— C90/270

Mounting Accessories

MC-KBX-SAP-SM-0.8-SA



KBX Mounting Channel, Serrated Aluminum Profile, Surface Mount, 0.8in, Silver Anodized



Aluminum mounting bracket providing grip. For use with light strip mounted to the ceiling. 1 recommended every 8 in.

MC-KBX-SAP-SM-78-SA



KBX Mounting Channel, Serrated Aluminum Profile, Surface Mount, 78in, Silver Anodized

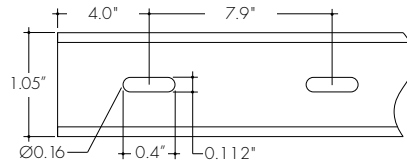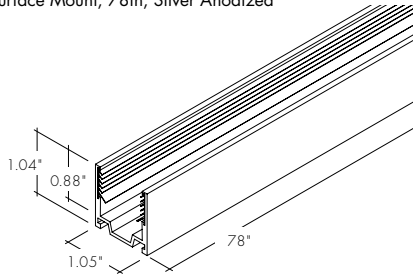

Aluminum mounting channel providing grip. For use with light strip mounted to the ceiling.

MC-FS-KBL-F-V-78


Flanged Mounting Channel with grip, 78"

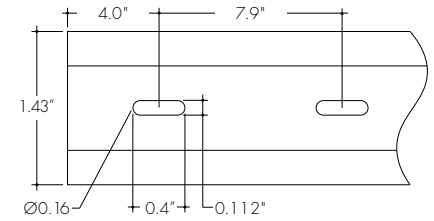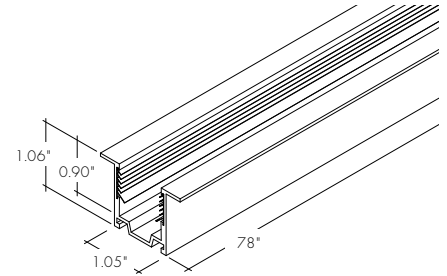

Flanged aluminum mounting channel providing grip. For use with light strip mounted to the ceiling.

MC-KBX-BSAP-HB-SM-38-SA


KBX Mounting Channel, Bendable Serrated Aluminum Profile, Horizontal Bending, Surface Mount, 38in, Silver Anodized

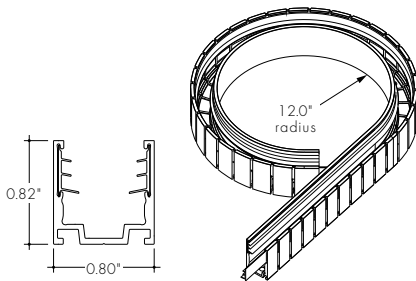

Bendable stainless steel mounting channel providing grip. For use with light strip mounted to the ceiling. **NOTE:** Compatible with HB - Horizontal Bend only


LVSP-WET

Splice box: wet rated, low voltage, gray



LVSP-WET-CM

Connector for splice box, low voltage for cable management, gray




43SO | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry.
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"
 A - End Connector at both ends of Kurba (0.20" + 0.20" added to overall length)
 B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (0.20" + 0.08" added to overall length)
 C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (0.08" + 0.08" added to overall length)


Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)			
	W	A	B	C		W	A	B	C		W	A	B	C		W	A	B	C
6	2.6	6.3	6.2	6.1	77	32.4	77.2	77.1	76.9	148	62.1	148.0	147.9	147.8	219	91.8	218.9	218.8	218.7
8	3.5	8.3	8.2	8.0	79	33.2	79.1	79.0	78.9	150	62.9	150.0	149.9	149.8	221	92.6	220.9	220.8	220.6
10	4.3	10.2	10.1	10.0	81	34.0	81.1	81.0	80.9	152	63.7	152.0	151.9	151.7	223	93.4	222.8	222.7	222.6
(1FT) 12	5.1	12.2	12.1	12.0	83	34.8	83.1	83.0	82.8	154	64.5	153.9	153.8	153.7	225	94.2	224.8	224.7	224.6
14	5.9	14.2	14.1	13.9	(7FT) 85	35.7	85.0	84.9	84.8	(13FT) 156	65.4	155.9	155.8	155.7	227	95.1	226.8	226.7	226.5
16	6.8	16.1	16.0	15.9	87	36.5	87.0	86.9	86.8	158	66.2	157.9	157.8	157.6	(19 FT) 229	95.9	228.7	228.6	228.5
18	7.6	18.1	18.0	17.9	89	37.3	89.0	88.9	88.7	160	67.0	159.8	159.7	159.6					
20	8.4	20.1	20.0	19.8	91	38.1	91.0	90.8	90.7	162	67.8	161.8	161.7	161.6					
22	9.2	22.1	21.9	21.8	93	39.0	92.9	92.8	92.7	164	68.7	163.8	163.7	163.5					
(2FT) 24	10.1	24.0	23.9	23.8	95	39.8	94.9	94.8	94.6	166	69.5	165.8	165.6	165.5					
26	10.9	26.0	25.9	25.8	(8FT) 97	40.6	96.9	96.7	96.6	(14FT) 168	70.3	167.7	167.6	167.5					
28	11.7	28.0	27.8	27.7	99	41.4	98.8	98.7	98.6	170	71.1	169.7	169.6	169.5					
30	12.5	29.9	29.8	29.7	101	42.3	100.8	100.7	100.6	172	72.0	171.7	171.5	171.4					
32	13.4	31.9	31.8	31.7	103	43.1	102.8	102.6	102.5	174	72.8	173.6	173.5	173.4					
34	14.2	33.9	33.7	33.6	105	43.9	104.7	104.6	104.5	176	73.6	175.6	175.5	175.4					
(3FT) 36	15.0	35.8	35.7	35.6	107	44.7	106.7	106.6	106.5	178	74.4	177.6	177.4	177.3					
38	15.8	37.8	37.7	37.6	(9FT) 109	45.6	108.7	108.5	108.4	(15FT) 180	75.3	179.5	179.4	179.3					
40	16.7	39.8	39.7	39.5	110	46.4	110.6	110.5	110.4	182	76.1	181.5	181.4	181.3					
42	17.5	41.7	41.6	41.5	112	47.2	112.6	112.5	112.4	184	76.9	183.5	183.4	183.2					
44	18.3	43.7	43.6	43.5	114	48.0	114.6	114.5	114.3	185	77.7	185.4	185.3	185.2					
46	19.1	45.7	45.6	45.4	116	48.9	116.5	116.4	116.3	187	78.6	187.4	187.3	187.2					
(4FT) 48	20.0	47.6	47.5	47.4	118	49.7	118.5	118.4	118.3	189	79.4	189.4	189.3	189.1					
50	20.8	49.6	49.5	49.4	(10FT) 120	50.5	120.5	120.4	120.2	191	80.2	191.3	191.2	191.1					
52	21.6	51.6	51.5	51.3	122	51.3	122.4	122.3	122.2	(16FT) 193	81.0	193.3	193.2	193.1					
54	22.4	53.5	53.4	53.3	124	52.2	124.4	124.3	124.2	195	81.9	195.3	195.2	195.0					
56	23.3	55.5	55.4	55.3	126	53.0	126.4	126.3	126.1	197	82.7	197.3	197.1	197.0					
57	24.1	57.5	57.4	57.2	128	53.8	128.4	128.2	128.1	199	83.5	199.2	199.1	199.0					
59	24.9	59.5	59.3	59.2	130	54.6	130.3	130.2	130.1	201	84.3	201.2	201.1	200.9					
(5FT) 61	25.7	61.4	61.3	61.2	(11FT) 132	55.5	132.3	132.2	132.0	203	85.2	203.2	203.0	202.9					
63	26.6	63.4	63.3	63.2	134	56.3	134.3	134.1	134.0	(17FT) 205	86.0	205.1	205.0	204.9					
65	27.4	65.4	65.2	65.1	136	57.1	136.2	136.1	136.0	207	86.8	207.1	207.0	206.9					
67	28.2	67.3	67.2	67.1	138	57.9	138.2	138.1	138.0	209	87.6	209.1	208.9	208.8					
69	29.1	69.3	69.2	69.1	140	58.8	140.2	140.0	139.9	211	88.5	211.0	210.9	210.8					
71	29.9	71.3	71.1	71.0	142	59.6	142.1	142.0	141.9	213	89.3	213.0	212.9	212.8					
(6FT) 73	30.7	73.2	73.1	73.0	(12FT) 144	60.4	144.1	144.0	143.9	215	90.1	215.0	214.8	214.7					
75	31.5	75.2	75.1	75.0	146	61.2	146.1	145.9	145.8	(18 FT) 217	90.9	216.9	216.8	216.7					

Note: All values are rounded to the nearest 0.1 inch.


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB




44HO | Power Consumption Per Fixture Length


Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry.
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"
 A - End Connector at both ends of Kurba (0.20" + 0.20" added to overall length)
 B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (0.20" + 0.08" added to overall length)
 C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (0.08" + 0.08" added to overall length)

Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)			
	W	A	B	C		W	A	B	C		W	A	B	C
7	2.9	7.0	6.8	6.7	86	35.9	85.7	85.6	85.5	165	68.9	164.5	164.3	164.2
9	3.8	9.1	9.0	8.9	88	36.8	87.9	87.8	87.7	167	69.9	166.6	166.5	166.4
(1 ft) 11	4.8	11.3	11.2	11.1	90	37.8	90.1	90.0	89.8	(14 ft) 169	70.8	168.8	168.7	168.6
14	5.7	13.5	13.4	13.3	92	38.7	92.3	92.2	92.0	171	71.7	171.0	170.9	170.8
16	6.6	15.7	15.6	15.5	95	39.6	94.5	94.3	94.2	173	72.6	173.2	173.1	173.0
18	7.5	17.9	17.8	17.7	(8 ft) 97	40.5	96.6	96.5	96.4	176	73.5	175.4	175.3	175.2
20	8.4	20.1	20.0	19.8	99	41.4	98.8	98.7	98.6	178	74.4	177.6	177.5	177.3
22	9.3	22.3	22.2	22.0	101	42.3	101.0	100.9	100.8	(15 ft) 180	75.4	179.8	179.6	179.5
(2 ft) 24	10.3	24.5	24.3	24.2	103	43.3	103.2	103.1	103.0	182	76.3	182.0	181.8	181.7
27	11.2	26.6	26.5	26.4	106	44.2	105.4	105.3	105.2	184	77.2	184.1	184.0	183.9
29	12.1	28.8	28.7	28.6	(9 ft) 108	45.1	107.6	107.5	107.3	187	78.1	186.3	186.2	186.1
31	13.0	31.0	30.9	30.8	110	46.0	109.8	109.7	109.5	189	79.0	188.5	188.4	188.3
33	13.9	33.2	33.1	33.0	112	46.9	112.0	111.8	111.7	(16 ft) 191	79.9	190.7	190.6	190.5
(3 ft) 35	14.8	35.4	35.3	35.2	114	47.9	114.1	114.0	113.9	193	80.9	192.9	192.8	192.7
38	15.8	37.6	37.5	37.3	116	48.8	116.3	116.2	116.1	195	81.8	195.1	195.0	194.8
40	16.7	39.8	39.7	39.5	119	49.7	118.5	118.4	118.3	198	82.7	197.3	197.1	197.0
42	17.6	42.0	41.8	41.7	(10 ft) 121	50.6	120.7	120.6	120.5	200	83.6	199.5	199.3	199.2
44	18.5	44.1	44.0	43.9	123	51.5	122.9	122.8	122.7	202	84.5	201.6	201.5	201.4
46	19.4	46.3	46.2	46.1	125	52.4	125.1	125.0	124.8	(17 ft) 204	85.4	203.8	203.7	203.6
(4 ft) 49	20.3	48.5	48.4	48.3	127	53.4	127.3	127.1	127.0	206	86.4	206.0	205.9	205.8
51	21.3	50.7	50.6	50.5	130	54.3	129.5	129.3	129.2	208	87.3	208.2	208.1	208.0
53	22.2	52.9	52.8	52.7	(11 ft) 132	55.2	131.6	131.5	131.4	211	88.2	210.4	210.3	210.2
55	23.1	55.1	55.0	54.8	134	56.1	133.8	133.7	133.6	213	89.1	212.6	212.5	212.3
57	24.0	57.3	57.2	57.0	136	57.0	136.0	135.9	135.8	(18 ft) 215	90.0	214.8	214.6	214.5
(5 ft) 60	24.9	59.5	59.3	59.2	138	57.9	138.2	138.1	138.0	217	90.9	217.0	216.8	216.7
62	25.8	61.6	61.5	61.4	141	58.9	140.4	140.3	140.2	219	91.9	219.1	219.0	218.9
64	26.8	63.8	63.7	63.6	143	59.8	142.6	142.5	142.3	222	92.8	221.3	221.2	221.1
66	27.7	66.0	65.9	65.8	(12 ft) 145	60.7	144.8	144.6	144.5	224	93.7	223.5	223.4	223.3
68	28.6	68.2	68.1	68.0	147	61.6	147.0	146.8	146.7	226	94.6	225.7	225.6	225.5
70	29.5	70.4	70.3	70.2	149	62.5	149.1	149.0	148.9	(19 ft) 228	95.5	227.9	227.8	227.6
(6 ft) 73	30.4	72.6	72.5	72.3	152	63.4	151.3	151.2	151.1	Note: All values are rounded to the nearest 0.1 inch.				
75	31.3	74.8	74.7	74.5	154	64.4	153.5	153.4	153.3					
77	32.3	77.0	76.8	76.7	(13 ft) 156	65.3	155.7	155.6	155.5					
80	33.2	79.1	79.0	78.9	158	66.2	157.9	157.8	157.7					
81	34.1	81.3	81.2	81.1	160	67.1	160.1	160.0	159.8					
(7 ft) 84	35.0	83.5	83.4	83.3	162	68.0	162.3	162.1	162.0					


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB




Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Universal Power Supply 1% 120VAC - 277VAC

MODEL	POWER	OUTPUT
PDCU-D - IP20 Dry Series	30 - 30 W 60 - 60 W 96 - 96 W 3X96 - 3X96 W	24 - 24 VDC
PDCU-W - IP66 Wet Series	96 - 96 W 3X96 - 3X96 W	

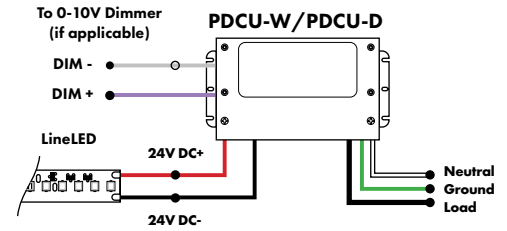



0-10V dims down to 1%, MLV/ELV/TRIAC dims down to 1%.
For a complete list of compatible dimmers, see [Compatible Dimming Chart](#) on the Resources page.

MODELS	PDCU-W 96W	PDCU-W 3X96W	PDCU-D 30W	PDCU-D 60W	PDCU-D 96W	PDCU-D 3X96W
Length	8.66"	11.85"	6.10"	7.93"	8.25"	9.57"
Width	3.73"	4.32"	3.35"	3.35"	4.10"	5.94"
Depth	1.61"	1.81"	1.33"	1.32"	1.56"	1.13"

0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	POWER	OUTPUT	DIMMING
PS010V - 0-10V Power Supply dims down to 0.1%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC	LIN - Linear LOG - Logarithmic

MODELS	96W	3X96
Length	14.40"	15.75"
Width	5.20"	6.62"
Depth	2.60"	4.95"

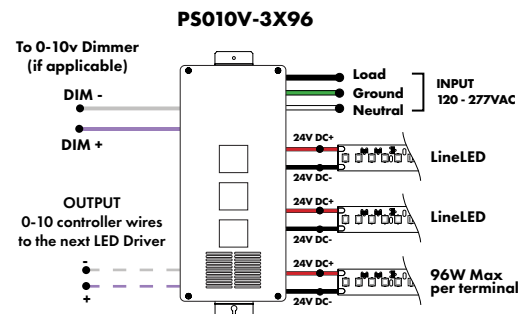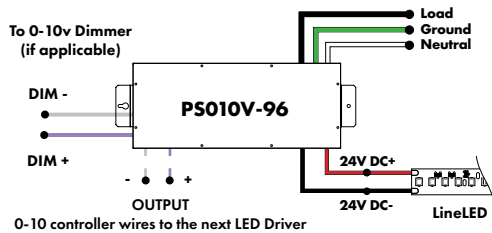

Power Supplies



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

DMX Dimming Power Supplies 120VAC - 277VAC

MODEL	POWER	OUTPUT
PSDMX - DMX Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers

MODELS	96W	3X96
Length	14.40"	15.75"
Width	5.20"	6.62"
Depth	2.60"	4.95"

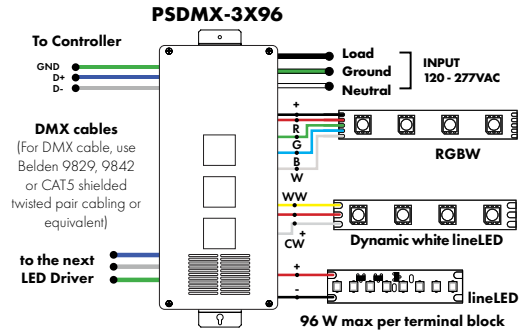
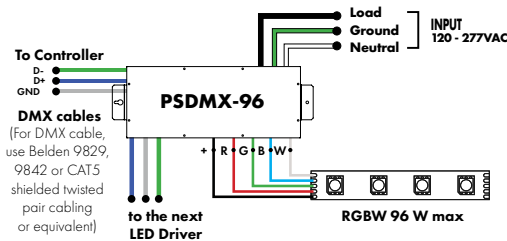


DALI 0% Dimming Power Supplies 120VAC - 277VAC

MODEL	POWER	OUTPUT
PSDALI - DALI Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers


Model	96W	3X96
Length	14.40"	15.75"
Width	5.20"	6.62"
Depth	2.60"	4.95"

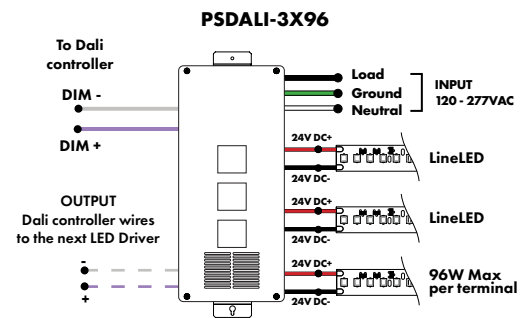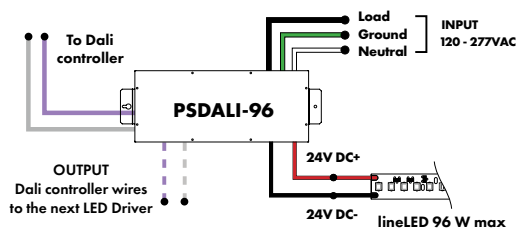

Enlighted Enabled Dimming Power Supplies 120VAC - 277VAC

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV - PSV Series	96 - 96 Watt	24 - 24 VDC	ENL - Enlighted Dimming dims down to 0%	D - Damp

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"

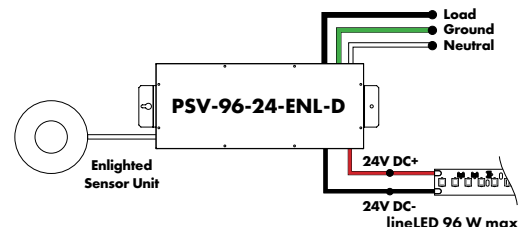


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Non-Dimming Power Supply 120VAC - 277VAC

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV - PSV Series	96 - 96 Watt	24 - 24 VDC	ND - Non Dimming	D - Damp

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

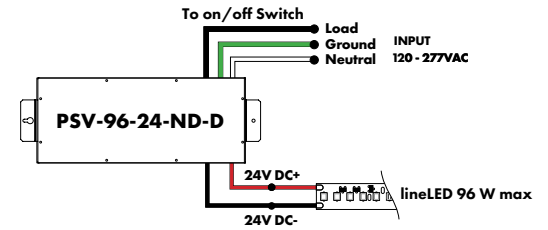


Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 1%

MODEL
L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver
40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

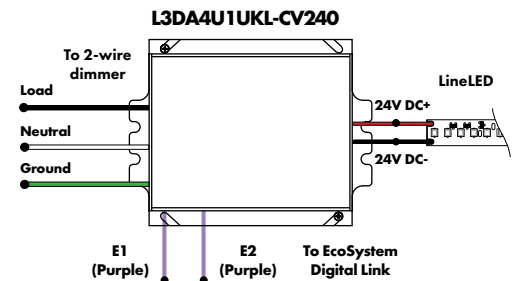


Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL
L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™
96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

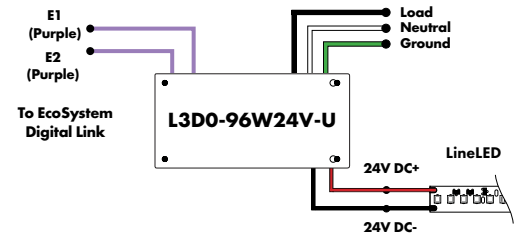

In-Ground Power Supplies

MODEL	POWER	OUTPUT	INPUT
IG - In ground CVE Series CVE - ELV Dimming DALI - eldoLED Dali dimming Both dims down to 0%	96X2 - 2 X 96 Watt	24 - 24 VDC	Blank - 120 V 277 - 240/277 V

MODELS	Dual Circuit
Length	8.40"
Width	8.30"
Depth	8.10"

