







Latona 1 - Recessed downlight. The Latona 1 is a smaller, stylish recessed fixture that features the 93CRI Accuracy module. This fixture is a small but a powerful option that features stationary positioning to guarantee correct position of light.

#### **Ordering Code**

Fixtur	e <b>510</b>							
	1	2	3	4	5	6	7	8
Drive	r	510						
	1	2	3	4	5	6	7	8

#### **Product Specifications**

SAMPLE: Fixture 510 - FL - A90 - 615 - 27 - 07 - 00 - 01 | Driver 910 - 510 - FL - STD - 120 - A90 - 07 - 01

1 - Model	2 - Trim	Trim 3 - LED		4 - Reflector		5 - CCT 6 - Lumen		7 - Accessory	
<b>510</b> • Latona 1	FL - Flanged 99 - Flangeless	<b>A90</b> - 93+ CRI Acc	,	88° Faceted	27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K	<b>07</b> · 700 (6.1W) <b>10</b> · 1000 (9.1W) <b>15</b> · 1500 (14W)		00 · No Accessory DL · Diffusing Lens	
8 - Finish	1 - Housing Style	2 - Mode	l 3 - Trim	4 - Driver		Dim Level			Dim Level
01 · White 02 · Black 08 · Silver XX · Custom	<b>910</b> ⋅ Remote <b>915</b> ⋅ New Construct <b>920</b> ⋅ IC Housing*1/2/8		Same as Fixture	LCS - DIM - ELDOLC -	Non Dimming 0 - 10 Volt Protocol Phase* EldoLED 0 - 10 Volt* Dali Protocol*	N/A 1% 1% 0.1%	LUT2W DMX	<ul> <li>Hilume Ecodigital*4</li> <li>2 Wire for phase*3/4</li> <li>SENSO*4</li> <li>Emergency Driver*4/5</li> </ul>	1% 1%
5 - Line Voltage	6 - LED	7 - Lumen	8 - Finish*7						
<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V*4/6	Same as Fixture	Same as Fixture	Same as Fixture Only required with Flangeless Trim			uantity: — Type: —			

<sup>\*1 1000</sup>lm max

<sup>\*2</sup> Not available with flangeless trim

<sup>\*3 120</sup>V only

<sup>\*6</sup> Not available with ELDO, Lutron or DMX

<sup>\*7</sup> Only required with **Flangeless Trim** 

<sup>\*8</sup> JA8 Compliant

#### RECESSED LED DOWNLIGHT



#### **Light Engine**

up to 1500lm

High Efficacy: up to 98 lumen/Watt

Color Options (CCT): 2500K, 2700K, 3000K, 3500K, 4000K or 6500K

Color Consistency: Range within a 3-MacAdam Ellipse

Color rendering (CRI): 93+ CRI & 50+ R9 Value

#### Driver

Dimming: 1% dimming standard with 0.1% option

Ripple: Industry leading Low ripple

Power Factor > 0.9 Efficiency:

> Efficiency over 85% Class 2 output for safety

Installation: Small Footprint allows retrofit installations

Lumen Option	700lm	1000lm	1500lm
Delivered Lumen	602lm	891lm	1340lm
Fixture Wattage	6.1W	9.1W	14W


## Reflector **Faceted Reflector** Smooth Reflector

#### Installation

- · For new and retrofit installations
- · Easy installation with spring loaded tabs
- Simple connection between fixture and driver via quick connect
- · Wet rated available

#### Construction/Finish

- · Powder coated in white, black or silver
- · Custom finish are available
- · Cast aluminum
- · Seismic tether
- · Made in Canada

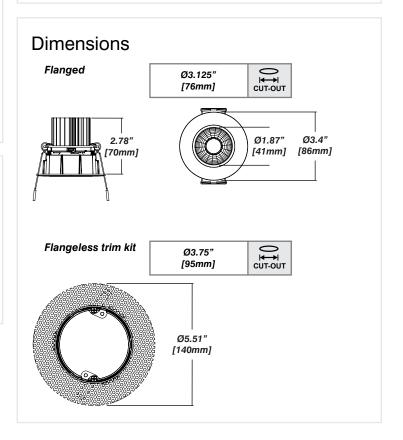

# LATONA 1








#### **Housing Options**

#### Standard Senso Housing - 910

#### Dimension









#### Included

Unless specified otherwise, this is provided as standard

Bar hanger

- Included with large 910 box only
- Length: from 14-3/16" to 26"
  - Mounting screws not included

Driver with enclosure Security wire


- **sure** Galvanized steel enclosure
  - Flexible aircraft cable, 12" long
  - · Easy to clip snap body included


(A) laying on top of ceiling. (B) mounted to the bar hanger and fixed to the ceiling. (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture

### New Construction - 915 Flanged



### Dimension






## New Construction - 915 Flangeless



#### Dimension



#### Included

Plaster Frame • Galvanized steel construction with cut-out to


**Bar hanger** • Length: from 14-3/16" to 26'

Outlet Box • Standard Senso housing 910 included

**Security wire** • Flexible aircraft cable, 12" long


· Easy to clip snap body included


#### IC Housing - 920





#### Dimension





#### Included

IC Housing

- Galvanized steel construction
- Airtight

Includes gasketed junction box

Plaster Frame

Galvanized steel construction

Bar hanger

Length: from 14-3/16" to 26"

**Note:** Lumen output cannot exceed 1000lm Not available in flangeless

<sup>\*</sup> driver can be installed either: