

# LATONA 3 WET

WET RATED RECESSED LED DOWNLIGHT



**Latona 3 Wet - Wet Rated Recessed LED Downlight.** The Latona 3 Wet is a smaller, stylish square recessed fixture that features the 93+CRI Accuracy module. This fixture is a small but a powerful option that features stationary positioning to guarantees correct position of light.

## Ordering Code

Fixture	<b>516</b>						
	1	2	3	4	5	6	7
Driver		<b>516</b>			--	--	
	1	2	3	4	5	6	

## Product Specifications

**SAMPLE:** Fixture **516 - A90 - 615 - 27 - 07 - 00 - 01** | Driver **910 - 515 - STD - 120 - A90 - 07**

1 - Model	2 - LED	3 - Reflector	4 - CCT	5 - Lumen	6 - Accessory	7 - Finish
<b>516</b> · Latona 3 Wet-Rated	<b>A90</b> · 93+ CRI Accuracy	<b>615</b> · 15° <b>638F</b> · 38° Faceted <b>640</b> · 40° <b>660</b> · 60°	<b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K	<b>07</b> · 700 (6.1W) <b>10</b> · 1000 (9.1W) <b>15</b> · 1500 (14W)	<b>CL</b> · Clear Lens <b>DL</b> · Diffusing Lens	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom

1 - Housing Style	2 - Model	3 - Driver	Dim Level	Dim Level	4 - Line Voltage
<b>910</b> · Remote <b>915</b> · New construction <b>920</b> · IC Housing <sup>*1/2</sup>	Same as Fixture	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase <sup>*3</sup> <b>ELDOLC</b> · EldoLED 0 - 10 Volt <sup>*4</sup> <b>DALI</b> · Dali Protocol <sup>*4</sup>	N/A 1% 1% 0.1% 0.1%	<b>LUTES</b> · Hilume Ecodigital <sup>*4</sup> <b>LUT2W</b> · 2 Wire for phase <sup>*3/4</sup> <b>DMX</b> · SENSO <sup>*4</sup> <b>EMG</b> · Emergency Driver <sup>*4/5</sup>	1% 1% <b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V <sup>*4/6</sup>

5 - LED	6 - Lumen		
Same as Fixture	Same as Fixture	*1 JA8 Compliant *2 1000lm max *3 120V only *4 Requires remote housing *5 Specified separately *6 Not available with ELDO, Lutron or DMX	Project : _____ Quantity : _____ Type : _____ Notes : _____

# LATONA 3 WET

WET RATED RECESSED LED DOWNLIGHT



## Light Engine


- Output:** up to 1500lm
- High Efficacy:** up to 75 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI & 50+ R9 Value

## Driver


- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations

Lumen Option	700lm	1000lm	1500lm
Delivered Lumen	488lm	723lm	1080lm
Fixture Wattage	6.1W	9.1W	14W

## Dimensions

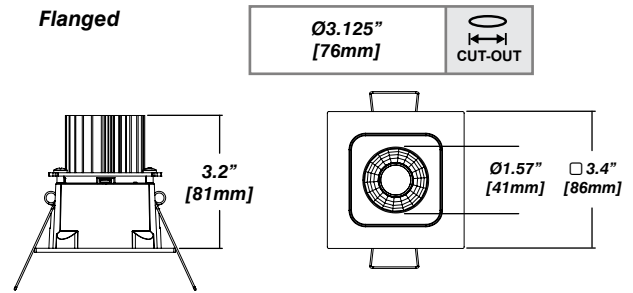

## Reflector

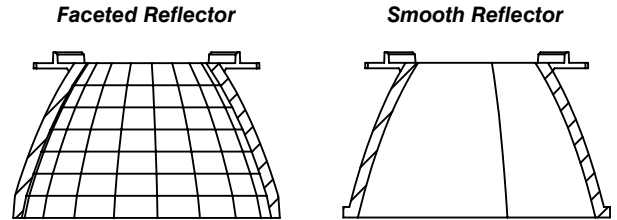

## Installation

- For new and retrofit installations
- Easy installation with spring loaded tabs
- Simple connection between fixture and driver via quick connect
- Wet Rated for damp conditions

## Construction/Finish

- Powder coated in white, black or silver
- Custom finish are available
- Cast aluminum
- Seismic tether
- Made in Canada

# LATONA 3 WET



WET RATED RECESSED LED DOWNLIGHT



## Housing Options

### Standard Senso Housing - 910

### Dimension

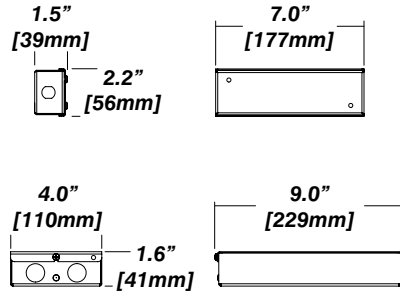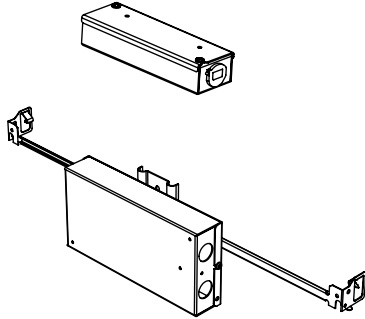

### Included

Unless specified otherwise, this is provided as standard



- Bar hanger**
  - Included with large 910 box only
  - Length: from 14-3/16" to 26"
  - Mounting screws not included
- Driver with enclosure**
  - Galvanized steel enclosure
- Security wire**
  - Flexible aircraft cable, 12" long
  - Easy to clip snap body included

\* driver can be installed either:

- (A) laying on top of ceiling.
- (B) mounted to the bar hanger and fixed to the ceiling.
- (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture

### New Construction - 915 Flanged

### Dimension

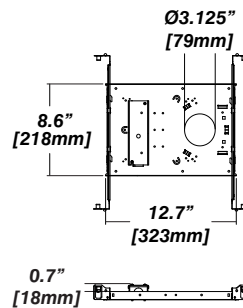



### Included

- Plaster Frame**
  - Galvanized steel construction
- Bar hanger**
  - Length: from 14-3/16" to 26"
- Outlet Box**
  - Standard Senso housing 910 included
- Security wire**
  - Flexible aircraft cable, 12" long
  - Easy to clip snap body included

### IC Housing - 920

### Dimension

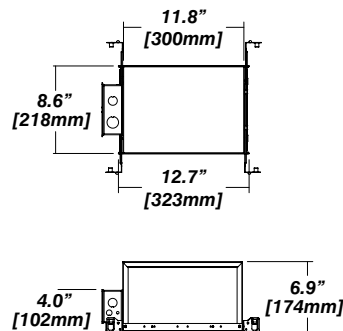

### Included

- IC Housing**
  - Galvanized steel construction
  - Airtight
  - Includes gasketed junction box
- Plaster Frame**
  - Galvanized steel construction
- Bar hanger**
  - Length: from 14-3/16" to 26"

**Note:** Lumen output cannot exceed 1000lm  
Not available in flangeless

