

# LETO 44 P SML

PENDANT LED DOWNLIGHT



**Leto 44 P SML - Pendant LED Downlight.** As a perfect cube, Leto 44 P SML can be used as both a standalone figure as well as in an array with other Leto 44 P SML fixtures.

## Ordering Code

Fixture	<b>700</b>							
	1	2	3	4	5	6	7	8
Driver							--	--
	1	2	3	4	5	6	7	8

## Product Specifications

**SAMPLE:** Fixture **700 - A90 - 615 - 27 - 07 - DL - 08 - 01** | Driver **952 - 08 - 02 - 01 - STD - 120 - A90 - 07**

1 - Model	2 - LED	3 - Optic		4 - CCT	5 - Lumen	6 - Accessory			
<b>700</b> · Leto 44 Small Pendant	<b>A90</b> · 93+ CRI Accuracy	<i>Faceted</i>	<i>Smooth</i>	<b>25</b> · 2500K	<b>07</b> · 700 (6.1W)	<b>00</b> · No Accessory			
		<b>615</b> · 15°	<b>630S</b> · 30°	<b>27</b> · 2700K	<b>10</b> · 1000 (9.1W)	<b>DL</b> · Diffusing Lens			
		<b>630</b> · 30°	<b>645S</b> · 45°	<b>30</b> · 3000K		<b>HO</b> · Honeycomb			
		<b>645</b> · 45°		<b>35</b> · 3500K		<b>SL</b> · Solite Lens			
		<b>660</b> · 60°		<b>40</b> · 4000K					
				<b>65</b> · 6500K					
7 - Body Color		8 - Baffle Color		1 - Canopy Style	2 - Canopy Color		3 - Suspension (6' incl.)		
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	<b>956</b> · Square	<i>Standard</i>	<i>Premium</i>	<b>02</b> · 2 Aircraft + Feed Cable		
<b>01</b> · White	<b>52</b> · Mocha	<b>01</b> · White	<b>52</b> · Mocha		<b>01</b> · White	<b>52</b> · Mocha	<b>03</b> · Solid Stem (6' MAX)		
<b>02</b> · Black	<b>53</b> · Charcoal	<b>02</b> · Black	<b>53</b> · Charcoal		<b>02</b> · Black	<b>53</b> · Charcoal	<b>04</b> · Hang Straight Solid Stem		
<b>08</b> · Silver	<b>54</b> · Cerulean	<b>08</b> · Silver	<b>54</b> · Cerulean		<b>08</b> · Silver	<b>54</b> · Cerulean	<b>05</b> · 2 Powered Aircraft <sup>*1</sup>		
	<b>55</b> · Firebrick		<b>55</b> · Firebrick			<b>55</b> · Firebrick	Contact Senso for specific length		
	<b>XX</b> · RAL		<b>XX</b> · RAL			<b>XX</b> · RAL			
4 - Suspension Color	5 - Driver		Dim Level		Dim Level		6 - Voltage	7 - LED	8 - Lumen
<b>00</b> · None <sup>*1</sup>	<b>STD</b> · Non Dimming	N/A	<b>LUTES</b> · Hilume Ecodigital	1%	<b>120</b> · 120V	Same as	Same as		
<b>01</b> · White	<b>LCS</b> · 0 - 10 Volt Protocol	1%	<b>LUT2W</b> · 2 Wire for phase <sup>*2</sup>	1%	<b>277</b> · 277V	Fixture	Fixture		
<b>02</b> · Black	<b>DIM</b> · Phase <sup>*2</sup>	1%	<b>DMX</b> · Senso <sup>*3</sup>		<b>347</b> · 347V <sup>*3/5</sup>				
<b>03</b> · Clear	<b>ELDOLC</b> · EldoLED 0 - 10 Volt	0.1%	<b>EMG</b> · Emergency Driver <sup>*3/4</sup>						
<b>XX</b> · Custom	<b>DALI</b> · Dali Protocol	0.1%	<b>CSMB</b> · Casambi Wireless Control <sup>*3/4</sup>						

\*1 no suspension color option for **05** - 2 Powered Aircraft

\*2 120V only

\*3 remote mount

\*4 second driver required


\*5 not available with ELDO, Lutron or DMX

# LETO 44 P SML


PENDANT LED DOWNLIGHT

## Suspension


**2 Aircraft Cable  
w/ Feed Cable**

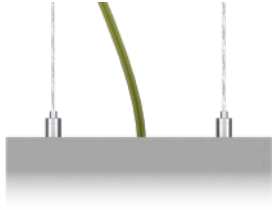

**Solid Stem**



**2 Powered Aircraft**

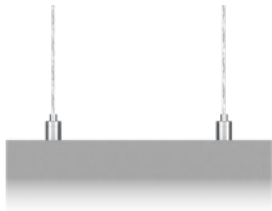


## Installation

- The included canopy fits on a standard junction box
- Height adjustable aircraft cable, feed cable or solid stem suspension (specify height) included
- Electrical feed cable included

## Construction / Finish


- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

## Dimensions

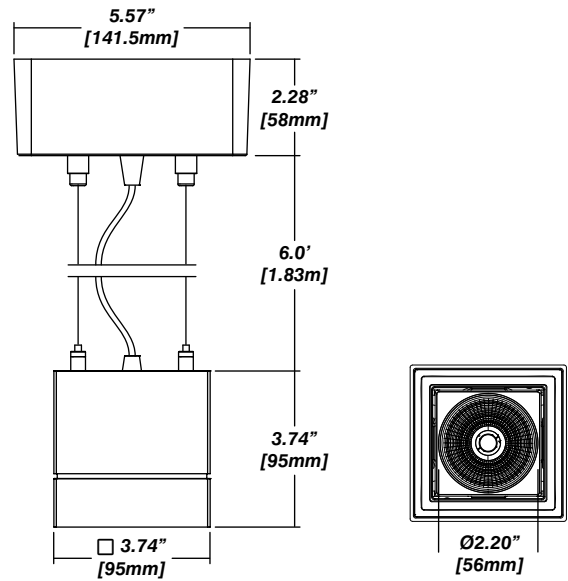


## Reflector

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

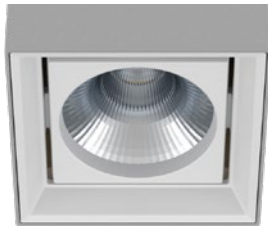


## Accessories


**Diffusing Lens**



**Honeycomb Mesh**

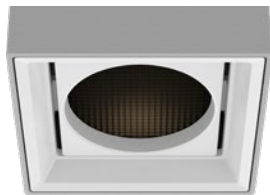

**Solite Lens**

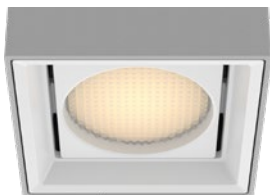

## Canopy

**Square Canopy:** W/L - 5.67" [144mm] / H - 2.28" [58mm]

Drivers mounted in the Square Canopy: **STD, LCS, DIM, ELDOLC, DALI, LUTES**  
Drivers remote mounted: **DMX, EMG, CSMB**

**2 Aircraft Cable  
w/ Feed Cable**



**2 Powered  
Aircraft Cable**



**Solid Stem**



**Hang Straight  
Solid Stem**



# LETO 44 P SML

PENDANT LED DOWNLIGHT




## Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See [Sensolighting.com](http://Sensolighting.com) for more information.

*\*Full photometric Reports and IES files available for every configuration*

## Leto 44 Light Distribution

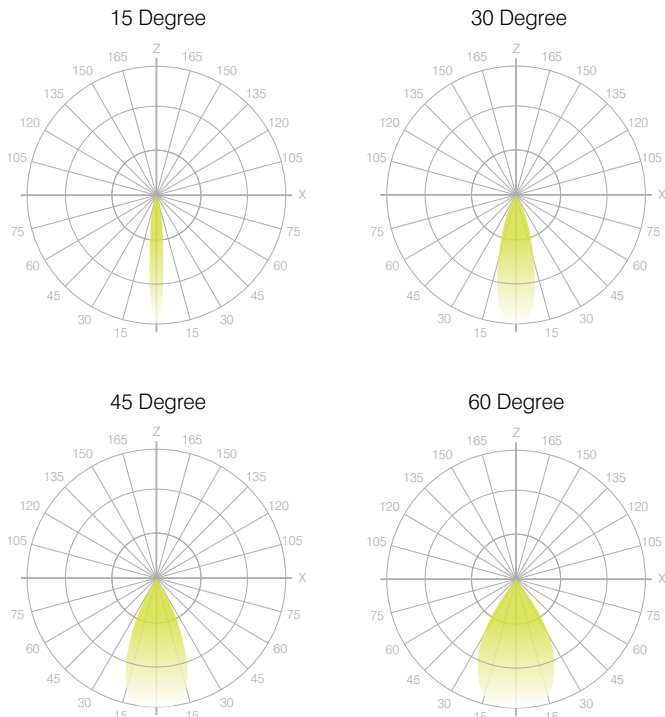

## Color Metrics

### TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

*\*Full Color Metric Info Available at [Sensolighting.com](http://Sensolighting.com)*

## LED Module Performance

- Output:** Up to 150 lumen/Watt
- Efficacy:** Color consistency within a 3-MacAdam Ellipse
- CCT:** 2500K - 6500K
- Color Rendering:** 90+ CRI
- Min. R Values:** R<sup>9</sup> - 60 R<sup>f</sup> - 90 R<sup>a</sup> - 100

## Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option  
Casambi wireless control available
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety
- Installation:** Canopy or remote mounted

<b>Lumen Option</b>	700lm	1000lm
<b>Fixture Wattage</b>	6.1W	9.1W
<b>Delivered Lumen</b>	691lm	1018lm