


# LETO 11 ADJ

## ADJUSTABLE WALL MOUNT CYLINDER

### TUNABLE WHITE & WARM DIM

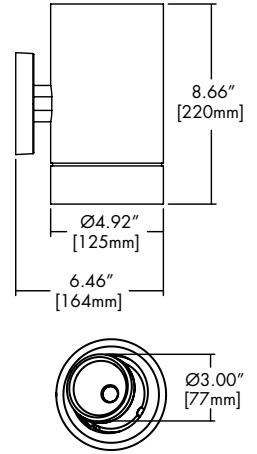

### Features

- 360° rotation and up to 30° total tilt.
- Field interchangeable faceted metal reflectors provide adjustable beam spreads between 18° to 60°.
- Four output options available up to 2000 lumens.
- Nine driver selections available to cover wide range of applications.
- Five year warranty.

### Finish Options

- White
- Black
- Silver
- Mocha
- Charcoal
- Cerulean
- Firebrick



### Technical Information

TYPE	WD1830				TW2765	
	700 lm	1000lm	1500lm	2000lm	1500lm	2000lm
<b>OUTPUT OPTIONS</b>						
<b>Fixture wattage</b>	7.2 W	11.4 W	16.4 W	21.6 W	12.9 W	16.4 W
<b>Delivered Lumen</b>	724 lm	1153 lm	1632 lm	2037 lm	1538 lm	1816 lm
<b>Efficacy</b>	101 lm/W	101 lm/W	100 lm/W	94 lm/W	119 lm/W	111 lm/W
<b>Center Beam Candlepower (18° Faceted Reflector)</b>	4536 cd	5324 cd	7537 cd	9703 cd	6310 cd	7451 cd

CCT	CRI	TM-30		
		R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

### Ordering Code

Integral Driver Example: Fixture LET11A-WM-07-WD1830-F18-NA-WH-WH-PHSD-NA  
 Remote Driver Example: Fixture LET11A-WM-07-WD1830-F18-NA-WH-WH-PHSD-NA  
 HRM-LET11A-WM-07-WD1830-PHSD-NA

### Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY*	BODY FINISH	BAFFLE FINISH
LET11A - Leto 11 Adjustable	WM - Wall Mount	07 - 700 lumens <sup>1</sup> 10 - 1000 lumens 15 - 1500 lumens 20 - 2000 lumens	WD1830 - Warm Dim, 1800K-3000K TW2765 - Tunable White, 2700K-6500K <sup>5,6,7</sup>	F18 - 18 Degree, Faceted F30 - 30 Degree, Faceted F45 - 45 Degree, Faceted F60 - 60 Degree, Faceted	NA - No Accessory CL - Clear Lens DL - Diffusing Lens  *Max of two accessories per fixture. See page 2 for ordering part number.	Standard WH - White BK - Black SL - Silver  Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	Standard WH - White BK - Black SL - Silver  Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick
DRIVER				DRIVER OPTIONS			

PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only  
 010S - 0-10V, 1% Dimming, 120/277V  
 0103 - 0-10V, 1% Dimming, 347V Only<sup>3</sup>  
 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V<sup>3</sup>  
 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V<sup>3</sup>  
 DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V<sup>3</sup>  
 DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V<sup>3</sup>  
 LUTE - Lutron HiLume Ecodigital, 1% Dimming, 120V/277V<sup>1,3</sup>  
 DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V<sup>3</sup>

NA - None  
 EMG - Emergency Driver<sup>3,4</sup>

1 - LUTE driver is not available at 700 lumens.  
 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.  
 3 - Drivers 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG are only available with HRM - Remote Power Supply.  
 4 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.  
 5 - TW2765 only available with 1500/2000 lumens.  
 6 - TW2765 only available with Drivers 010L/010G/DALI8/DMX. Not available with EMG driver option.  
 7 - TW2765 requires HRM - Remote Power Supply.

CONTACT FACTORY FOR MORE OPTIONS.

## Lens & Accessory Options

### OPTC-ACC-CL-65MM

#### Clear Lens

Also available with complete fixture, use ordering code.

**-CL**



### OPTC-ACC-DL-65MM

#### Diffusing Lens

Also available with complete fixture, use ordering code.

**-DL**



## Optics

### RFLC-FXX-60MM

#### Faceted Reflector

Also available with complete fixture, use ordering code.

**-F18/-F30/-F45/-F60**



FXX	Optic
F18	18° Faceted
F30	30° Faceted
F45	45° Faceted
F60	60° Faceted

# LETO 11 ADJ

ADJUSTABLE WALL MOUNT CYLINDER  
TUNABLE WHITE & WARM DIM

## Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11A-WM-Leto 11 Adjustable Wall Mount	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture

Maximum mounting distance to luminaire using 18 AWG wire								
PHSD	010S	0103	010L	010G	DALI	DALI8	LUTE	DMX
16'	16'	16'	72'	72'	72'	72'	15'	149'


### 4" J-box

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

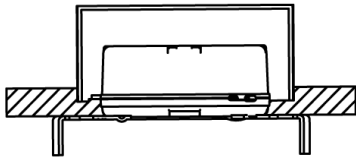


Driver
PHSD
010S

### HRM Single with Externally Mounted Driver

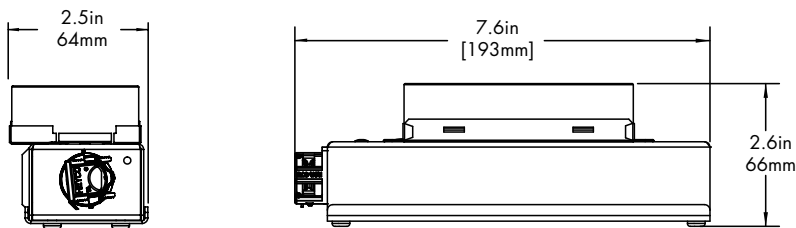

Driver
0103
010L
010G
DALI
LUTE


### HRM Double

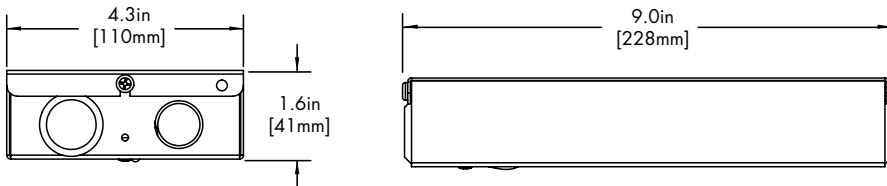

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

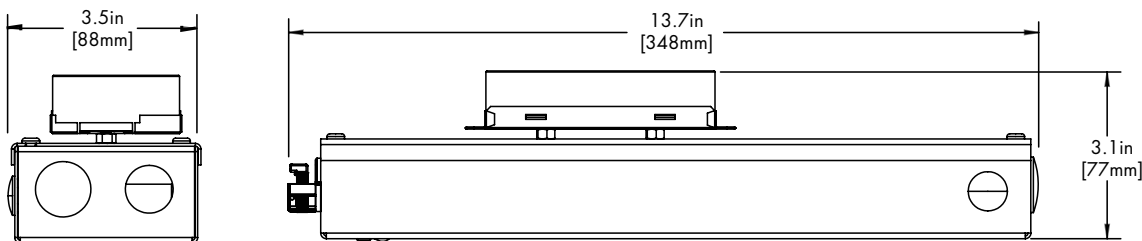

Driver
EMG

# LETO 11 ADJ

ADJUSTABLE WALL MOUNT CYLINDER  
TUNABLE WHITE & WARM DIM

## Standard Finish

**BK**  
Black



**WH**  
White



**SL**  
Silver



## Premium Finish

Two tone with Black Baffle Finish. Any combination may be used for baffle and body finishes.

**MA**  
Mocha



**CC**  
Charcoal



**CR**  
Cerulean




**FB**  
Firebrick



## TM-30


**Warm Dim 1800K**

COLOR VECTOR GRAPHIC




**Warm Dim 3000K**

COLOR VECTOR GRAPHIC




**Tunable White 2700K**

COLOR VECTOR GRAPHIC





**Tunable White 6500K**

COLOR VECTOR GRAPHIC





## Photometry



### 18° Faceted Reflector

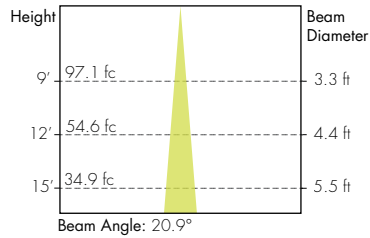

### 30° Faceted Reflector

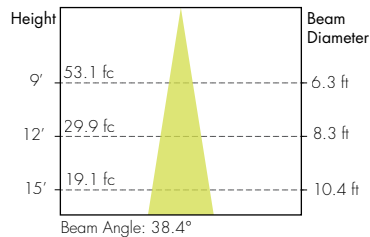

### 45° Faceted Reflector

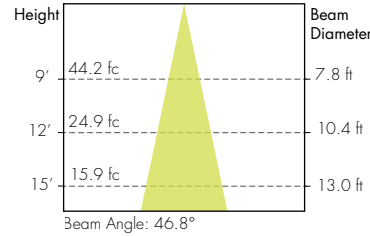

### 60° Faceted Reflector

