

LETO 11 MINI

SUSPENDED CYLINDER
TUNABLE WHITE & WARM DIM





Features

- Faceted metal reflectors provide beam spreads between 20° to 60°.
- Three output options available up to 1500 lumens.
- Nine drivers selections available to cover wide range of applications.
- Five year warranty.



Finish Options

- White Silver Mocha Firebrick Warm Nickel
- Black Charcoal Cerulean Bronze Aged Brass

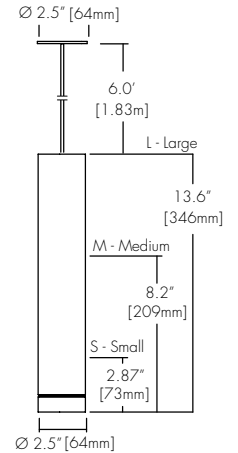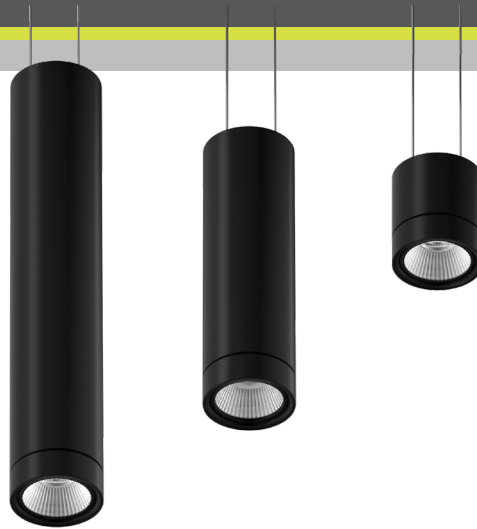

Technical Information

| TYPE | WD1830 | | TW2765 |
|--|----------------|---------------|---------------|
| OUTPUT OPTIONS | 700 lm (S/M/L) | 1000 lm (M/L) | 1500 lm (M/L) |
| Fixture wattage | 7.2 W | 11.4 W | 16.5 W |
| Delivered Lumen | 819 lm | 1288 lm | 1617 lm |
| Efficacy | 114 lm/W | 113 lm/W | 98 lm/W |
| Center Beam Candlepower (20° Faceted Reflector) | 1689 cd | 2680 cd | 3464 cd |

| CCT | TM-30 | | | |
|-------|-------|----------------|----------------|----------------|
| | CRI | R _f | R _g | R ₉ |
| 1800K | 94 | 90 | 93 | 61 |
| 3000K | 94 | 89 | 97 | 72 |
| 2700K | 91 | 90 | 96 | 59 |
| 6500K | 93 | 87 | 97 | 73 |

Ordering Code

Integral Driver Example: Fixture LET11M-S-S-07-25K-F20-NA-WH-WH-RDS-WH-FC-NA-PHSD-NA

Remote Driver Example: Fixture LET11M-S-S-07-25K-F20-NA-WH-WH-RDS-WH-FC-NA-PHSD-NA-HRM-LET11M-S-07-25K-PHSD-NA

Fixture

| MODEL | TYPE | SIZE | OUTPUT | CCT | OPTIC | ACCESSORY | BODY FINISH | BAFFLE FINISH |
|---------------------|-------------|----------------------|--|--|--|---|--|--|
| LET11M-Leto 11 Mini | S-Suspended | S-Small ⁶ | 07-700 lumens (7.2W) | WD1830-Warm Dim, 1800K-3000K | F20-20 Degree, Faceted F30-30 Degree, Faceted F60-60 Degree, Faceted | NA-No Accessory DL-Diffusing Lens HC-Honeycomb Louver | Standard WH-White BK-Black S-Silver | Standard WH-White BK-Black S-Silver |
| | | M-Medium L-Large | 07-700 lumens (7.2W) 10-1000 lumens (11.4W) | WD1830-Warm Dim, 1800K-3000K | | | Premium ³ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass | Premium ³ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass |
| | | M-Medium L-Large | 15-1500 lumens (16.5W) | TW2765-Tunable White, 2700K-6500K ^{1,2} | | | | |

| CANOPY/ HOUSING | CANOPY FINISH | SUSPENSION TYPE | SUSPENSION FINISH | DRIVER | DRIVER OPTIONS ¹¹ |
|--|--|--|---|--|---|
| RDS-Round Slim SQS-Square Slim RTL-Round Flangeless RDR-Round Semi-Recessed | Standard WH-White BK-Black S-Silver Premium ³ MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass | FC-Feed Cable, 6ft SS2-Solid Stem, 2ft SS3-Solid Stem, 3ft SS6-Solid Stem, 6ft POA-2 Powered Aircraft, 6ft | Standard NA-None ⁴ CL-Clear ^{5,6} WH-White BK-Black SL-Silver ⁷ Premium ³ MA-Mocha ⁷ CC-Charcoal ⁷ CR-Cerulean ⁷ FB-Firebrick ⁷ BZ-Bronze WN-Warm Nickel AB-Aged Brass | PHSD-Forward/Reverse Phase, 1% Dimming, 120V Only 010S-0-10V, 1% Dimming, 120/277V 0103-0-10V, 1% Dimming, 347V Only ⁹ 010L-EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V ⁹ 010G-EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V ⁹ DALI-EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V ⁹ DALI8-EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V ⁹ LUTE-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V ^{8,9} DMX-EldoLED, DMX, 0.1% Dimming, 120V/277V ⁹ | NA-None EMG-Emergency Driver ^{9,10} |

1 - TW2765 only available with Drivers 010L/010G/DALI8/DMX. Not available with EMG driver option.
2 - TW2765 requires HRM - Remote Power Supply.
3 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
4 - Must select NA None when POA 2 Powered Aircraft Suspension is selected.
5 - Clear Suspension Finish only available with FC - Feed Cable.
6 - Size Small is not available with CL Clear suspension finish.

7 - These finishes are only available with SS Solid Stem.
8 - LUTE driver is not available at 700 lumens.
9 - Drivers 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG are only available with HRM - Remote Power Supply.
10 - Emergency option comes prewired from factory with driver in remote housing. 8WV of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.
11 - AVNLR/CSMB available upon request.


CONTACT FACTORY FOR MORE OPTIONS.

LETO 11 MINI


SUSPENDED CYLINDER
TUNABLE WHITE & WARM DIM

Canopy


RDS
Round Slim Canopy




SQS
Square Slim Canopy



RTL
Round Flangless Canopy



RDR
Semi-Recessed

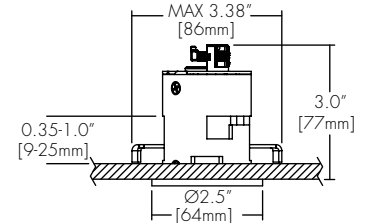

| RDS or SQS | |
|------------------|--|
| Integral Drivers | PHSD, 010S |
| Remote Drivers | 0103, 010L, 010G, DALI, DALI8, LUTE, DMX |

| RTL or RDR | |
|------------------|--|
| Integral Drivers | |
| Remote Drivers | PHSD, 010S, 0103, 010L, 010G, DALI, DALI8, LUTE, DMX |

Suspension


FC (6' incl.)
Feed Cable



SSX (2', 3', 6' max)
Solid Stem



POA (6' incl.)
2 Powered Aircraft



Lens & Accessory Options

DL
Diffusing Lens



HC
Honeycomb



Optics

FXX (20°, 30°, 60°)
Faceted Reflector



LETO 11 MINI

SUSPENDED CYLINDER
TUNABLE WHITE & WARM DIM

Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

| REMOTE DRIVER | MODEL | OUTPUT | CCT | DRIVER | DRIVER OPTIONS |
|---------------------|---------------------------------|-----------------|-----------------|-----------------|-----------------|
| HRM-Housing, Remote | LET11M-S-Leto 11 Mini Suspended | Same as Fixture | Same as Fixture | Same as Fixture | Same as Fixture |

| Maximum mounting distance to luminaire using 18 AWG wire | | | | | | | |
|--|------|------|------|------|------|------|------|
| 010S | 0103 | PHSD | 010L | 010G | DALI | DMX | LUTE |
| 16' | 16' | 16' | 72' | 72' | 72' | 149' | 15' |


4" J-box

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

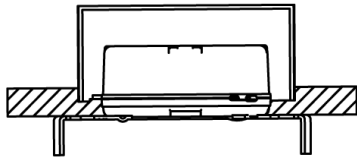


| Canopy | + | Driver |
|--------|---|--------|
| RDS | + | PHSD |
| RDS | + | 010S |
| SQS | + | PHSD |
| SQS | + | 010S |

HRM Single with Externally Mounted Driver

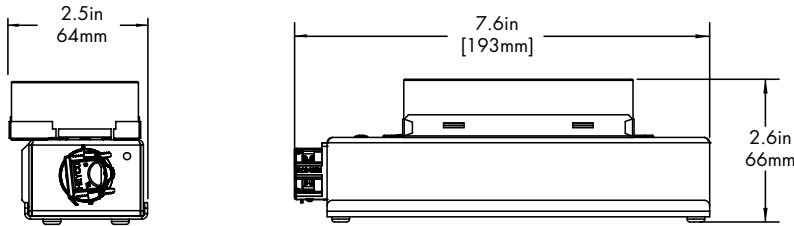


| Driver |
|--------|
| 0103 |
| 010L |
| 010G |
| 010S |
| DALI |
| LUTE |

HRM Double

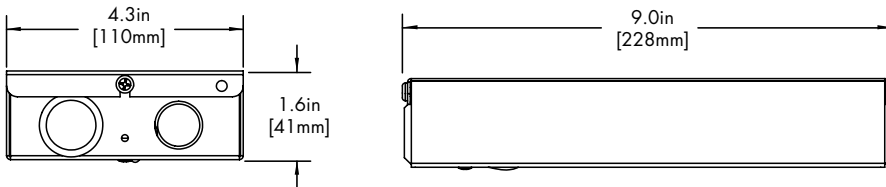

| Driver |
|--------|
| DALI8 |
| DMX |


HRM Cylinder Driver

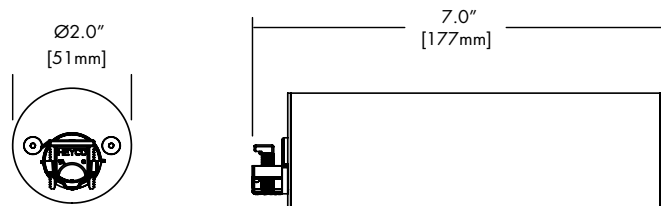

| Canopy | + | Driver |
|--------|---|--------|
| RDR | + | 010S |
| RDR | + | PHSD |

EMG Emergency Driver

120 minute EMG operation time.

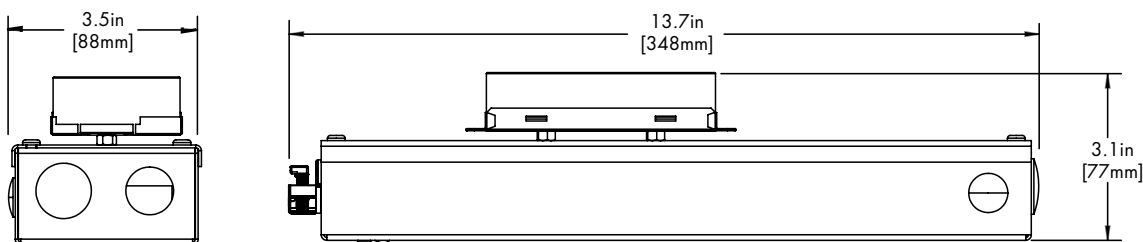

| Driver |
|--------|
| EMG |

LETO 11 MINI

SUSPENDED CYLINDER
TUNABLE WHITE & WARM DIM

Standard Finishes

BK
Black



WH
White



SL
Silver



Premium Finishes

MA
Mocha



CC
Charcoal



CR
Cerulean



FB
Firebrick



BZ
Bronze



WN
Warm Nickle



AB
Antique Bronze




LETO 11 MINI

SUSPENDED CYLINDER
TUNABLE WHITE & WARM DIM

TM-30

Warm Dim 1800K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Warm Dim 3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 6500K



COLOR VECTOR GRAPHIC





— Reference Source — Test Source

Photometry

20° Faceted Reflector

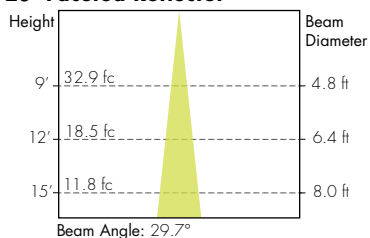

30° Faceted Reflector

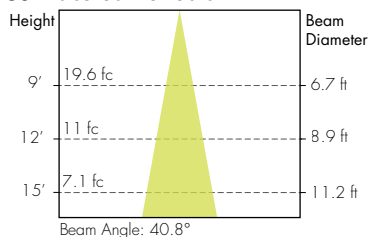

60° Faceted Reflector

