

# LETO 44 PLUS

WALL MOUNT ASYMMETRIC CYLINDER  
TUNABLE WHITE & WARM DIM




## Features

- Four output options available up to 2000 lumens.
- Nine drivers selections available to cover wide range of applications.
- Five year warranty.

## Finish Options

- White
- Black
- Silver
- Mocha
- Charcoal
- Cerulean
- Firebrick

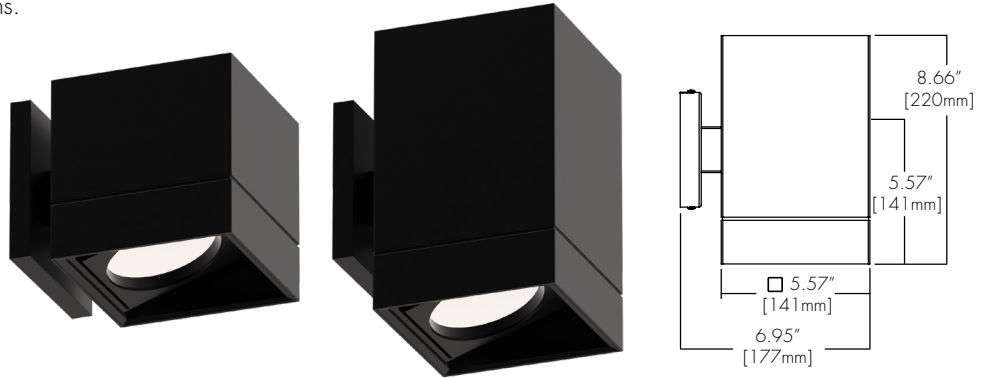

## Technical Information

TYPE	WD1830				TW2765
	700 lm	1000 lm	1500 lm	2000 lm	1500 lm
<b>OUTPUT OPTIONS</b>	700 lm	1000 lm	1500 lm	2000 lm	1500 lm
<b>Fixture wattage</b>	7.2 W	12.1 W	17.1 W	21.4 W	28.2 W
<b>Delivered Lumen</b>	560 lm	871 lm	1245 lm	1618 lm	1976 lm
<b>Efficacy</b>	78 lm/W	72 lm/W	73 lm/W	76 lm/W	70 lm/W
<b>Center Beam Candlepower</b>	732 cd	1138 cd	1627 cd	2114 cd	2642 cd

CCT	CRI	TM-30		
		R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

## Ordering Code

Integral Driver Example: Fixture LET44P-WM-S-07-WD1830-ASM-DL-WH-WH-PHSD-NA

Remote Driver Example: Fixture LET44P-WM-S-07-WD1830-ASM-DL-WH-WH-PHSD-NA-HRM-LET44P-WM-07-WD1830-PHSD-NA

### Fixture

MODEL	TYPE	SIZE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET44P - Leto 44 Plus	WM - Wall Mount	S - Small <sup>1,2</sup> M - Medium	07 - 700 10 - 1000 15 - 1500 <sup>3</sup> 20 - 2000	WD1830 - Warm Dim, 1800K-3000K TW2765 - Tunable White, 2700K-6500K <sup>3,4,5</sup>	ASM - Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver  Premium <sup>6</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	Standard WH - White BK - Black SL - Silver  Premium <sup>6</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick

### DRIVER

### DRIVER OPTIONS<sup>10</sup>

- PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only
- 010S - 0-10V, 1% Dimming, 120/277V
- 0103 - 0-10V, 1% Dimming, 347V Only<sup>8</sup>
- 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V<sup>4,8</sup>
- 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V<sup>4,8</sup>
- DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V<sup>8</sup>
- DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V<sup>4,8</sup>
- LUTE - Lutron HiLume Ecodigital, 1% Dimming, 120V/277V<sup>7,8</sup>
- DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V<sup>4,8</sup>

- NA - None
- EMG - Emergency Driver<sup>8,9</sup>

- 1 - Size Small max output is 1500 lumens.
- 2 - Size Small with WD1830 has a max output of 1000 lumens.
- 3 - TW2765 only available with 1500 lumens.
- 4 - TW2765 only available with Drivers 010L/010G/DALI8/DMX. Not available with EMG driver option.
- 5 - TW2765 requires HRM - Remote Power Supply.
- 6 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

- 7 - LUTE driver is not available at 700 lumens.
- 8 - 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG driver options will always require a remote driver.
- 9 - Emergency option comes prewired from factory with driver in remote housing. 8WV of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.
- 10 - AWWNR/CSMB available upon request, contact Senso for details.

CONTACT FACTORY FOR MORE OPTIONS.

# LETO 44 PLUS

WALL MOUNT ASYMMETRIC CYLINDER  
TUNABLE WHITE & WARM DIM

## Lens

---

### DL

Diffusing Lens

---



# LETO 44 PLUS

WALL MOUNT ASYMMETRIC CYLINDER  
TUNABLE WHITE & WARM DIM

## Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET44P-WM-Leto 44 Plus Wall Mount	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture

Maximum mounting distance to luminaire using 18 AWG wire								
PHSD	010S	0103	010L	010G	DALI	DALI8	LUTE	DMX
16'	16'	16'	72'	72'	72'	72'	15'	149'


### 4" J-box

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

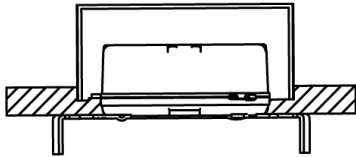


Driver
PHSD
010S

### HRM Single with Externally Mounted Driver

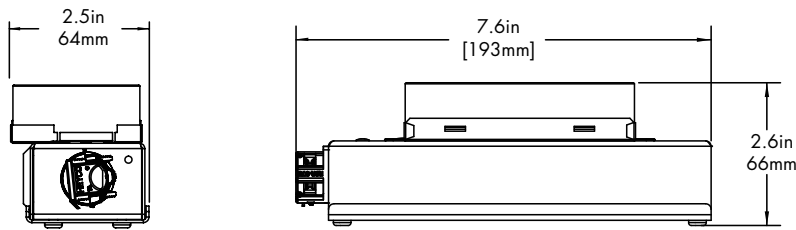

Driver
0103
010L
010G
DALI
LUTE


### HRM Double

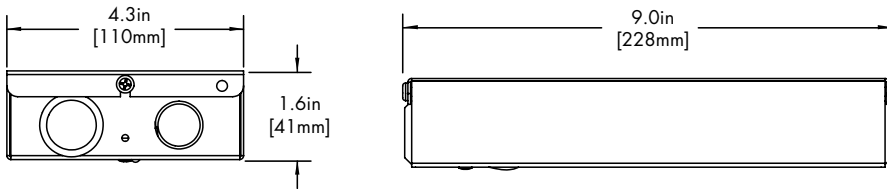

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

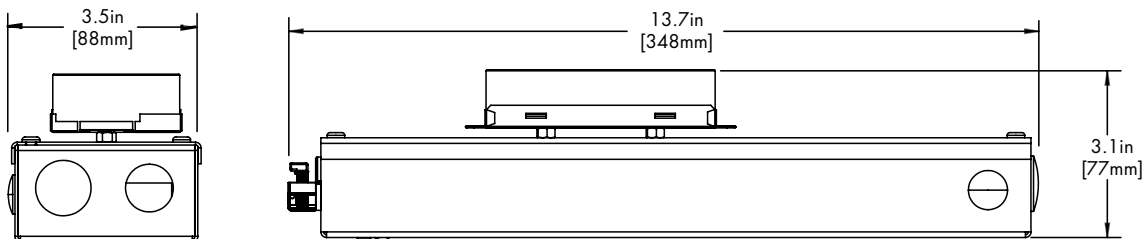

Driver
EMG

# LETO 44 PLUS

WALL MOUNT ASYMMETRIC CYLINDER  
TUNABLE WHITE & WARM DIM

## Standard Finish

**BK**  
Black



**WH**  
White



**SL**  
Silver



## Premium Finish

Two tone with Black Baffle Finish. Any combination may be used for baffle and body finishes.


**MA**  
Mocha




**CC**  
Charcoal



**CR**  
Cerulean



**FB**  
Firebrick




# LETO 44 PLUS

WALL MOUNT ASYMMETRIC CYLINDER  
TUNABLE WHITE & WARM DIM

## TM-30

Warm Dim 1800K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Warm Dim 3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 6500K

COLOR VECTOR GRAPHIC



— Reference Source — Test Source

## Photometry

### ASM - Asymmetric

