



**Features**

- The Class 2 DMX Power Supply is specifically designed to work with RGBW LineLED or modules and control 3 outputs rated at 96 watt each using standard DMX512
- Features eldoLED's LINEARdrive configurable dimmable DMX drivers. Intuitive user interface allows configuration of the number of channels
- DMX settings for network mode and show, color and dim values for standalone operation
- Suitable For Damp Location
- 5 year Warranty



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

**Technical Information**

**Input voltage**

120-277V AC, 1.1A, 50/60Hz

**Output signal**

24 VDC, 4.0 A

**Maximum wattage**

96 watt circuits

**Mounting**

Surface mounted with conduit access

**Dimming curve**

Linear, 100% - 0% (HydraDrive)

**Dimming**


0-10V (dimmer needs to be capable to dim to 0% without ON/OFF switch)

**Ambient Operating Temperature**


-20C to +35C

**Weight**

3.8 lbs

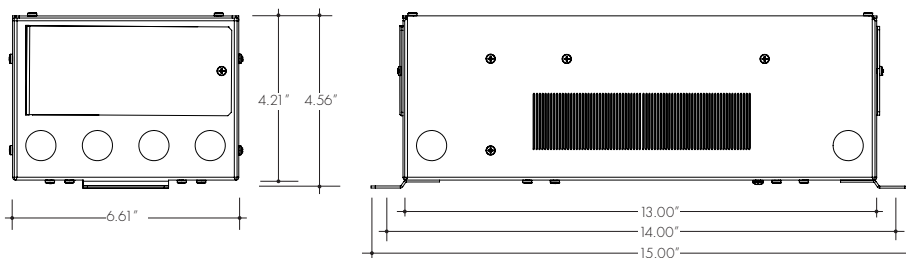

**Wiring Diagram**

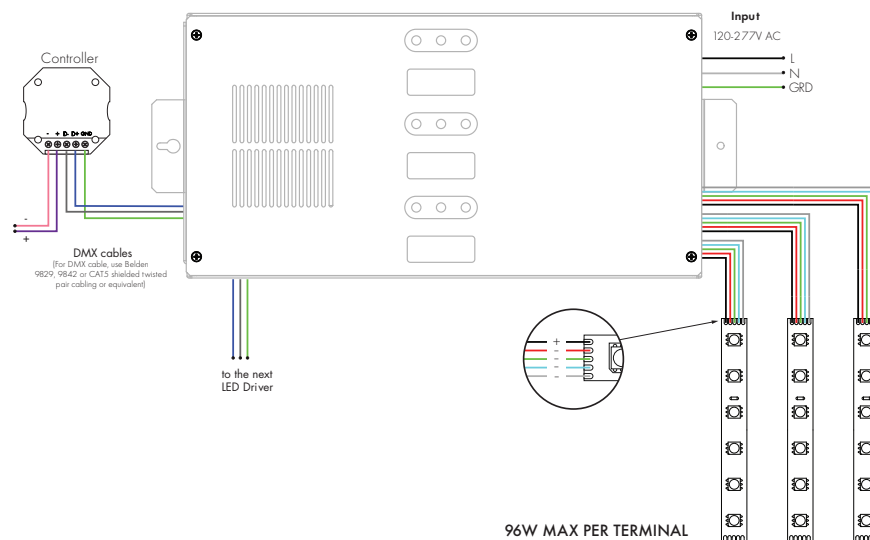

**Ordering Code**

