



Features

- The Class 2 DMX LED Driver is specifically designed to work with RGBW LineLED or modules and controls 96 watt using standard DMX512.
- Features eldoLED's LINEARdrive configurable dimmable DMX drivers. Intuitive user interface allows configuration of the number of channels
- DMX settings for network mode and show, color and dim values for standalone operation.
- Suitable For Damp Location
- 5 year Warranty



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

Technical Information

Input voltage

120-277V AC, 1.1A, 50/60Hz

Output signal

24 VDC, 4.0 A, DMX512

Maximum wattage

96 watt circuits

Mounting

Surface mounted with conduit access

Weight


3.8 lbs

Dimming curve


Linear, 100% - 0% (HydraDrive)

Ambient Operating Temperature

-20C to +35C

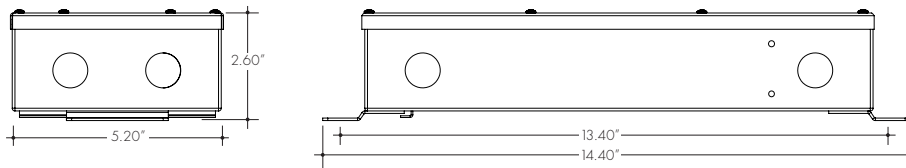

Wiring Diagram

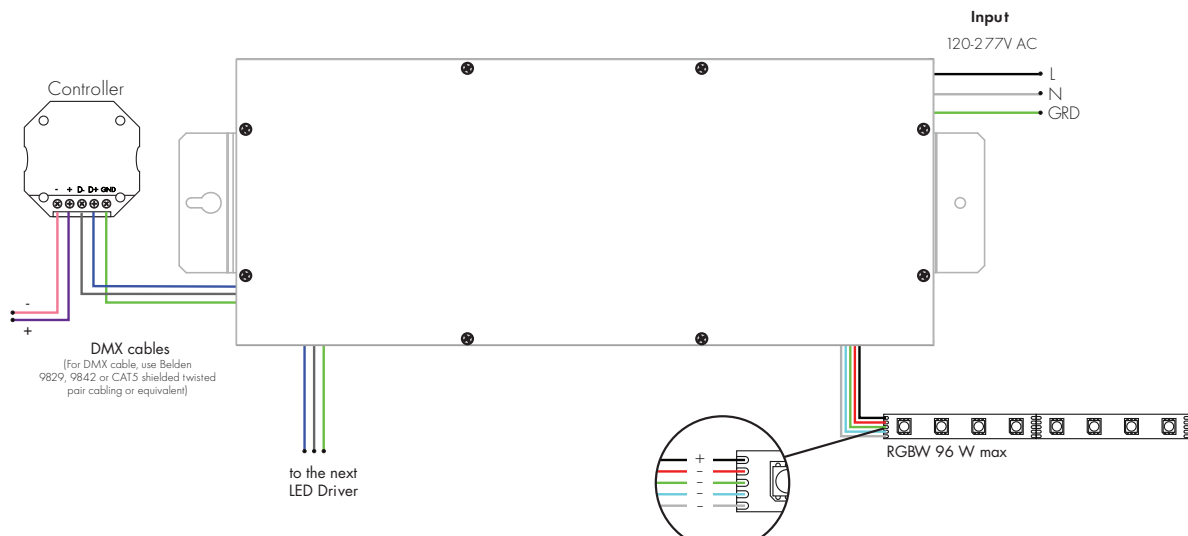

Ordering Code

MODEL	POWER	OUTPUT
PSDMX - DMX LED Driver	96 - 96 Watt	24 - 24 VDC