
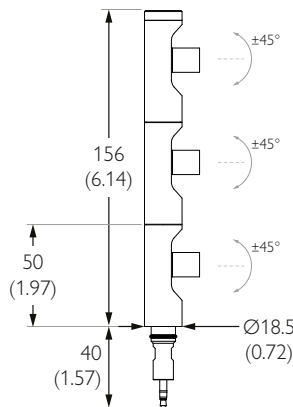


NARROW

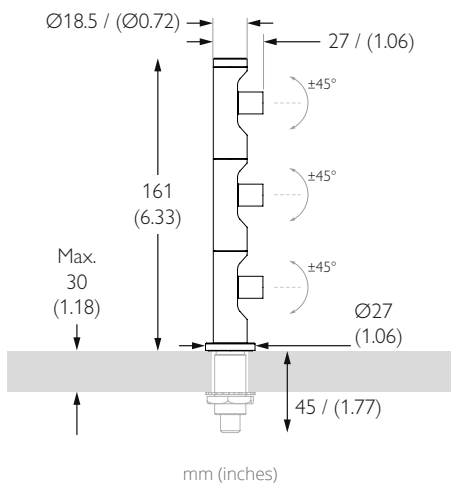

TECHNICAL DESCRIPTION

Stacko Multi-Aim 3 End is a Constant Current miniature display lighting product. It has four beam distributions and is a part of the modular Stacko Collection allowing users to 'stack' products together to create unique lighting set-ups that comes as standard in white, black and brushed aluminium. There are 3 light engines totalling 306lm | 3.36W. Each narrow beam in our 102lm light engine has a peak intensity of 794cd. This 'End' module closes the circuit and does not accept further modules. There can only be a maximum of 10 light engines per Stacko circuit or driver. The luminaire is compatible with our Minipoint system that enables a plug and play setup where luminaires can be swapped to suit changing lighting requirements.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 3.36W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 9.6V
PAN 360°	DRIVE CURRENT 350mA
TILT ±45°	SUPPLY TYPE Constant Current
LOCKABLE N/A	DRIVER LOCATION Remote
WEIGHT 81g 0.18lb	DIMMING DALI 0-10V 1-10V

MOUNTING

MOUNTING Minipoints	CUTOUT ø18mm (0.71") minipoint
CEILING THICKNESS 30mm (1.18") max	MIN CEILING VOID N/A


FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Matte Black Anodised | Rubbed Bronze* | Polished Brass* | Brushed Brass* | Polished Nickel*
*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

TOTAL NOMINAL LUMENS 306lm	BEAM ANGLE 16°
TOTAL DELIVERED LUMENS 282lm	CRI 95 TYP
LIGHT ENGINE DELIVERED LUMENS 94lm	TM-30 RF: 93 RG: 99
LIGHT ENGINES 3	WARRANTY 5 Years
COLOUR TEMPERATURE 2700K 3000K	STANDARDS
ACCESSORY HOLDER N/A	
ACCESSORIES Snoots	

Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

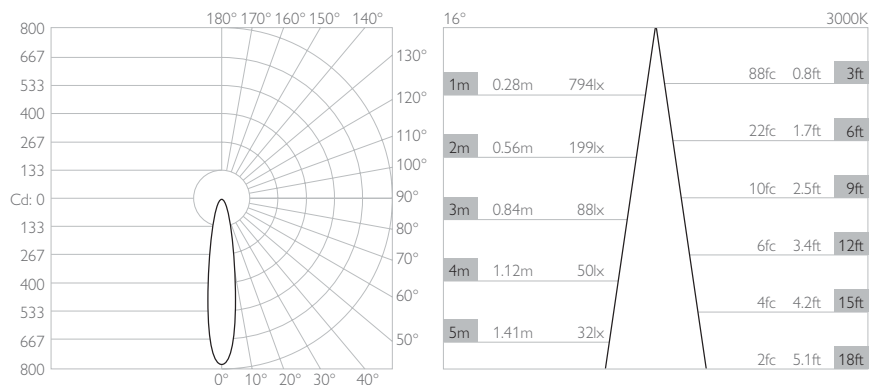

LUMINAIRE FINISH



	White 9010	Matt Anodised Black	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
Without Minipoint	1013-E-WH-XX9516	1013-E-EBA-XX9516	1013-E-AL-XX9516	1013-E-RB-XX9516	1013-E-PB-XX9516	1013-E-SB-XX9516
With Minipoint						

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

MEDIUM

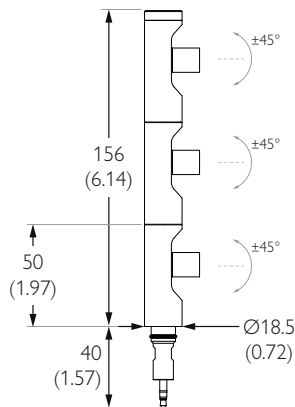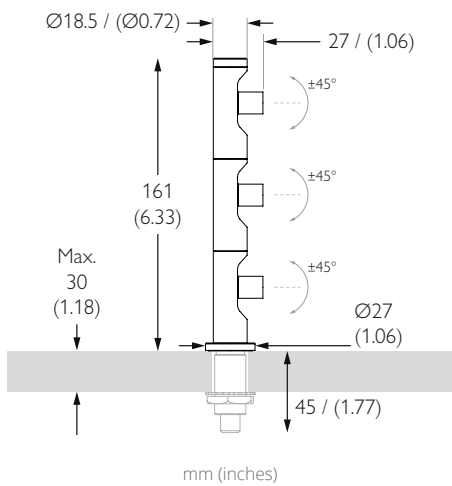

TECHNICAL DESCRIPTION

Stacko Multi-Aim 3 End is a Constant Current miniature display lighting product. It has four beam distributions and is a part of the modular Stacko Collection allowing users to 'stack' products together to create unique lighting set-ups that comes as standard in white, black and brushed aluminium. There are 3 light engines totalling 306lm | 3.36W. Each medium beam in our 102lm light engine has a peak intensity of 359cd. This 'End' module closes the circuit and does not accept further modules. There can only be a maximum of 10 light engines per Stacko circuit or driver. The luminaire is compatible with our Minipoint system that enables a plug and play setup where luminaires can be swapped to suit changing lighting requirements.

MECHANICAL & ELECTRICAL

CATEGORY IP20
MATERIAL Machined AL 6063-T6 | Machined Brass
PAN 360°
TILT ±45°
LOCKABLE N/A
WEIGHT 81g | 0.18lb

WATTAGE 3.36W
FORWARD VOLTAGE 9.6V
DRIVE CURRENT 350mA
SUPPLY TYPE Constant Current
DRIVER LOCATION Remote
DIMMING DALI | 0-10V | 1-10V

MOUNTING

MOUNTING Minipoints
CEILING THICKNESS 30mm (1.18") max
CUTOUT ø18mm (0.71") minipoint
MIN CEILING VOID N/A

FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Matte Black Anodised | Rubbed Bronze* | Polished Brass* | Brushed Brass* | Polished Nickel*
 *Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.


OPTICAL & STANDARDS

TOTAL NOMINAL LUMENS 306lm
TOTAL DELIVERED LUMENS 276lm
LIGHT ENGINE DELIVERED LUMENS 92lm
LIGHT ENGINES 3
COLOUR TEMPERATURE 2700K | 3000K
ACCESSORY HOLDER N/A
ACCESSORIES Snoots

BEAM ANGLE 23°
CRI 95 TYP
TM-30 RF: 93 RG: 99
WARRANTY 5 Years
STANDARDS



Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

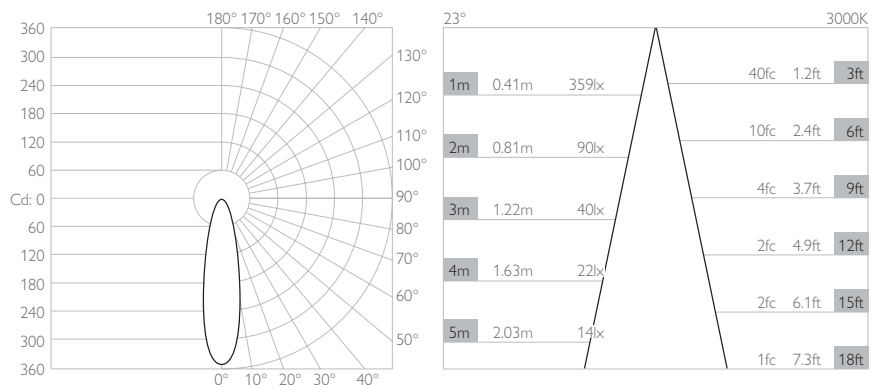

LUMINAIRE FINISH



	White 9010	Matt Anodised Black	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
Without Minipoint	1013-E-WH-XX9523	1013-E-EBA-XX9523	1013-E-AL-XX9523	1013-E-RB-XX9523	1013-E-PB-XX9523	1013-E-SB-XX9523
With Minipoint						

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

FLOOD

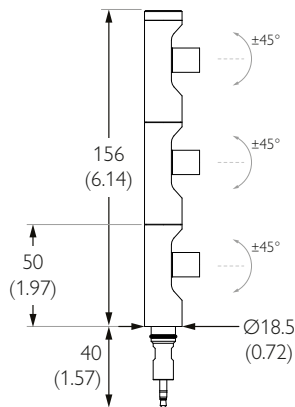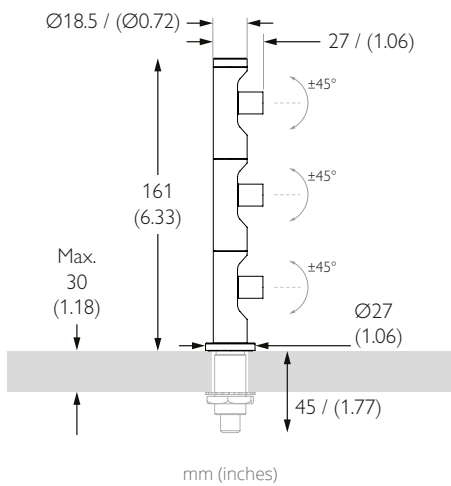

TECHNICAL DESCRIPTION

Stacko Multi-Aim 3 End is a Constant Current miniature display lighting product. It has four beam distributions and is a part of the modular Stacko Collection allowing users to 'stack' products together to create unique lighting set-ups that comes as standard in white, black and brushed aluminium. There are 3 light engines totalling 306lm | 3.36W. Each flood beam in our 102lm light engine has a peak intensity of 109cd. This 'End' module closes the circuit and does not accept further modules. There can only be a maximum of 10 light engines per Stacko circuit or driver. The luminaire is compatible with our Minipoint system that enables a plug and play setup where luminaires can be swapped to suit changing lighting requirements.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 3.36W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 9.6V
PAN 360°	DRIVE CURRENT 350mA
TILT ±45°	SUPPLY TYPE Constant Current
LOCKABLE N/A	DRIVER LOCATION Remote
WEIGHT 81g 0.18lb	DIMMING DALI 0-10V 1-10V

MOUNTING

MOUNTING Minipoints	CUTOUT ø18mm (0.71") minipoint
CEILING THICKNESS 30mm (1.18") max	MIN CEILING VOID N/A


FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Matte Black Anodised | Rubbed Bronze* | Polished Brass* | Brushed Brass* | Polished Nickel*
*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

TOTAL NOMINAL LUMENS 306lm	BEAM ANGLE 45°
TOTAL DELIVERED LUMENS 279lm	CRI 95 TYP
LIGHT ENGINE DELIVERED LUMENS 93lm	TM-30 RF: 93 RG: 99
LIGHT ENGINES 3	WARRANTY 5 Years
COLOUR TEMPERATURE 2700K 3000K	STANDARDS
ACCESSORY HOLDER N/A	
ACCESSORIES Snoots	

Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

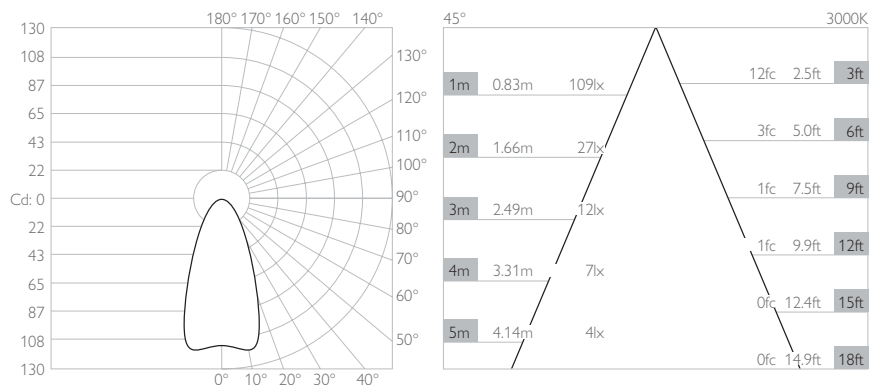

LUMINAIRE FINISH



	White 9010	Matt Anodised Black	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
Without Minipoint	1013-E-WH-XX9545	1013-E-EBA-XX9545	1013-E-AL-XX9545	1013-E-RB-XX9545	1013-E-PB-XX9545	1013-E-SB-XX9545
With Minipoint						

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

WIDE FLOOD

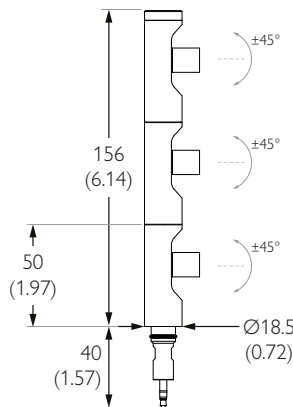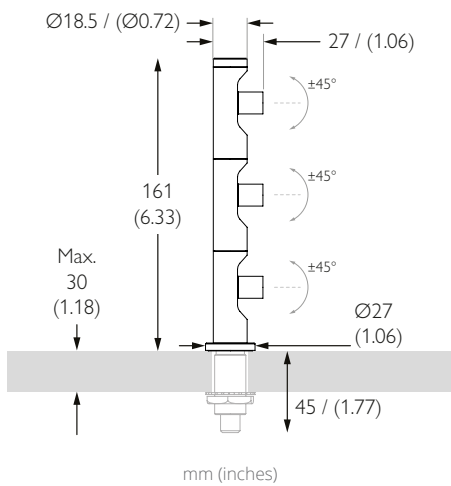

TECHNICAL DESCRIPTION

Stacko Multi-Aim 3 End is a Constant Current miniature display lighting product. It has four beam distributions and is a part of the modular Stacko Collection allowing users to 'stack' products together to create unique lighting set-ups that comes as standard in white, black and brushed aluminium. There are 3 light engines totalling 306lm | 3.36W. Each wide flood beam in our 102lm light engine has a peak intensity of 26cd. This 'End' module closes the circuit and does not accept further modules. There can only be a maximum of 10 light engines per Stacko circuit or driver. The luminaire is compatible with our Minipoint system that enables a plug and play setup where luminaires can be swapped to suit changing lighting requirements.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 3.36W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 9.6V
PAN 360°	DRIVE CURRENT 350mA
TILT ±45°	SUPPLY TYPE Constant Current
LOCKABLE N/A	DRIVER LOCATION Remote
WEIGHT 81g 0.18lb	DIMMING DALI 0-10V 1-10V

MOUNTING

MOUNTING Minipoints	CUTOUT ø18mm (0.71") minipoint
CEILING THICKNESS 30mm (1.18") max	MIN CEILING VOID N/A


FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Matte Black Anodised | Rubbed Bronze* | Polished Brass* | Brushed Brass* | Polished Nickel*
*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

TOTAL NOMINAL LUMENS 306lm	BEAM ANGLE 90°
TOTAL DELIVERED LUMENS 207lm	CRI 95 TYP
LIGHT ENGINE DELIVERED LUMENS 69lm	TM-30 RF: 93 RG: 99
LIGHT ENGINES 3	WARRANTY 5 Years
COLOUR TEMPERATURE 2700K 3000K	STANDARDS
ACCESSORY HOLDER N/A	
ACCESSORIES Snoots	

Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

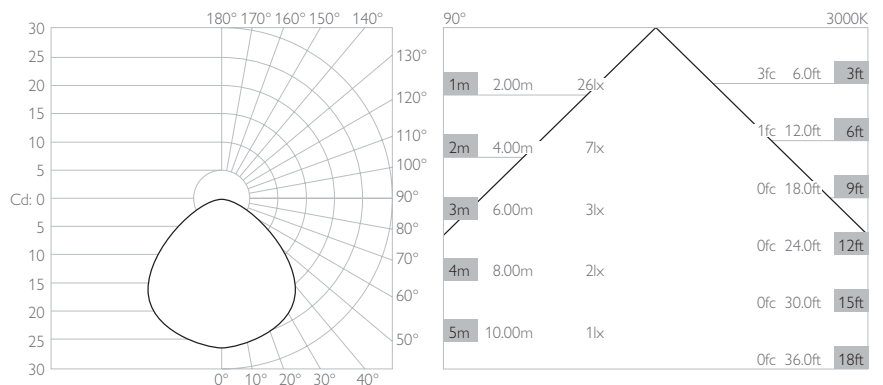

LUMINAIRE FINISH

	White 9010	Matt Anodised Black	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
Without Minipoint	1013-E-WH-XX9590	1013-E-EBA-XX9590	1013-E-AL-XX9590	1013-E-RB-XX9590	1013-E-PB-XX9590	1013-E-SB-XX9590
With Minipoint						

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27