
Contractor Grade Extruded aluminum profile





Features

Basics by Luminii Contractor-Grade corner 45° extrusions compatible with Basics by Luminii

Finish

Silver anodized

Diffuser Lens

Polycarbonate, snap-in-place, UV resistant


Mounting

Fixed Clip Mounting Bracket

Warranty

5 Years

Product Dimensions

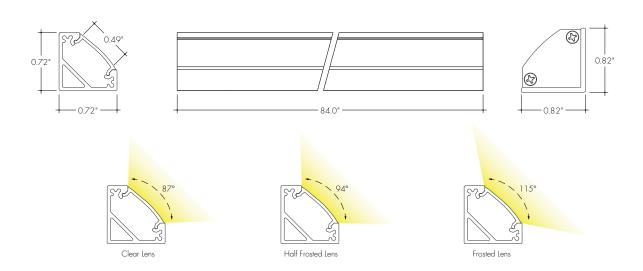

INCLUDED MOUNTING ACCESSORIES		
EXTRUSION LENGTH	MOUNTING HARDWARE	END CAP (PAIR)
84"	6	1


Each pair of endcaps includes 1x HO (no wire feed hole) and 1x H1 (with hole) where applicable. Additional endcaps and mounting clips are available for purchase.

TRANSMISSION PERCENTAGE (COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Clear	74%
Half Frosted	65%
Frosted	56%

See LED tape spec sheet for lens dotting characteristics & compatibility

Ordering code




- 1 End Caps are included with channel, one of H0 (no hole) and one of H1 (with hole). Order additional End Caps as necessary.
- 2 Mounting Clips are included with channel. Refer to chart above for provided mounting clip quantities. Order additional Mounting Clips as necessary.




Accessories

All Channels come with a specified set of Mounting Clips and End Caps, see Ordering Code for details. Order additional Mounting Clips and End Caps as necessary.

EC-B45C-H0-SA End Cap



EC-B45C-H1-SA End Cap with Powerfeed Opening



MB-B45C-SA Fixed Clip 45° -FC45

