

**Features**

Basics Contractor-Grade recessed extrusions compatible with Basics LED strips.

**Finish**

Silver anodized Channel

**Diffuser Lens**

Polycarbonate, snap-in-place, UV resistant



**Mounting**

Multiple mounting clip options ordered separately

**Warranty**

5 Years

**Product Dimensions**

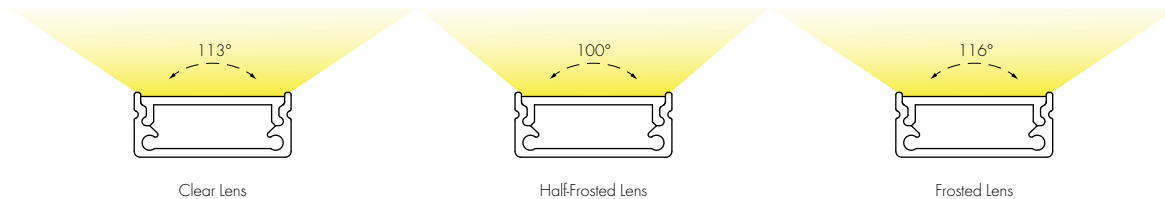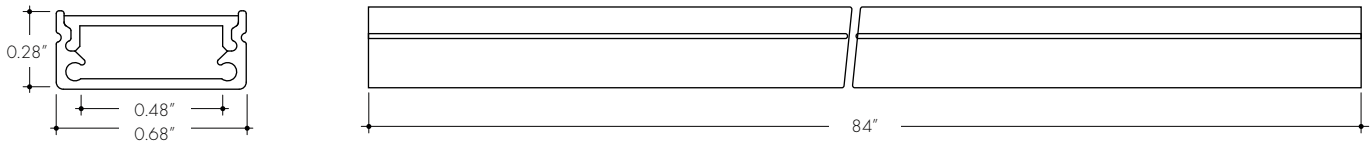

INCLUDED MOUNTING ACCESSORIES		
EXTRUSION LENGTH	MOUNTING HARDWARE	END CAP (PAIR)
84"	6	1

Each pair of endcaps includes 1x H0 (no wire feed hole) and 1x H1 (with hole) where applicable. Additional endcaps and mounting clips are available for purchase.

TRANSMISSION PERCENTAGE (COMPARED TO LED TAPE WITHOUT CHANNEL)	
LENS	TRANSMISSION %
Clear	83%
Half Frosted	73%
Frosted	69%

See LED tape spec sheet for lens dotting characteristics & compatibility

**Ordering code**

MODEL	LENGTH	LENS	MOUNTING <sup>2</sup>	FINISH
BSC · Basics Small Channel <sup>1</sup>	84 - 84"	C - Clear HF - Half Frosted F - Frosted	FC - Fixed Clip A - Adjustable	SA - Silver Anodized


1 - End Caps are included with channel, one of H0 (no hole) and one of H1 (with hole). Order additional End Caps as necessary.

2 - Mounting Clips are included with channel. Refer to chart above for provided mounting clip quantities. Order additional Mounting Clips as necessary.


**Accessories**

All Channels come with a specified set of Mounting Clips and End Caps, see Ordering Code for details. Order additional Mounting Clips and End Caps as necessary.



**EC-BSC-H0-SA**  
Silver Anodized End Cap

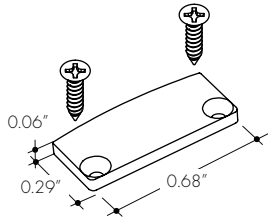

**EC-BSC-H1-SA**  
Silver Anodized End Cap with powerfeed opening

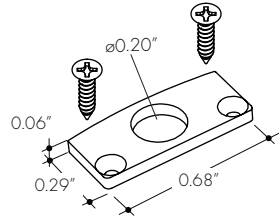

**MB-BMSC-SS**  
Fixed Clip  
**-FC**



**MB-BMSC-A-SS**  
Adjustable Clip  
**-A**

