



Kurba Medium Horizontal Static White

Field Bendable 24V System



Features

Kurba Medium is a dot free direct view, narrow profile, energy efficient and flexible LED strip suitable for outdoor wet locations capable of horizontal/side bends with a 2.5" bending radius. The silicone material offers excellent heat, weather, UV, and solvent resistance and has a special coating to repel dust and dirt accumulation.

Applications

Indoor/Outdoor dry & wet location

Materials

Silicone for red list approved, as well as heat, weather, UV, and solvent resistance

Dimming

Dimable down to 1% . Dot Free even illumination. Also available with Black Lens.

Average Life (L70)


50,000 Hours

Approvals

24VDC Class 2 wet listed, IP68

Warranty

3 years



Finish Options (see page 2 for additional information)

Base White

Premium Black Red Green Blue




Technical Information

Bending Direction	Horizontal		CCT INFO / LUMEN MULTIPLIER	
	22SO	33SO (Black Lens Only)	Color Temperature	Multiplier (ref. -3000K)
Output			2200K	0.80
Light Output at 3000K	122 lm/ft	21 lm/ft	2400K	0.90
Average Power Consumption at 4'	3.66 W/ft	3.66 W/ft	2700K	1.00
Efficacy	33 lm/W	6 lm/W	3000K	1.00
Ordering Increment	3.28"	2.19"	3500K	1.00
Maximum Run Length (In Series)	26'	26'	4000K	1.00
Operating Temperature Range	-40°F to 131°F	-40°F to 131°F	Note: 80 CRI	

Constraints

Horizontal Bend Direction


Bend LED in these positions only to avoid damage

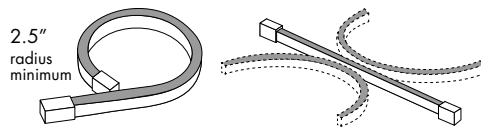

Illuminated surface shown in gray

Horizontal Prohibited Bends

Twisting or bending LED in these positions will cause damage



Illuminated surface shown in gray

Do not make sharp bends near the endcap

Ordering Code

MODEL	RATING	BEND DIRECTION	LENGTH	OUTPUT ¹	CCT	LENS	MOUNTING	FINISH ²	FEED POSITION LEFT	FEED POSITION RIGHT
KBM - Kurba Medium	W - Wet	HB - Horizontal Bending	SEE PCC CHART ON PAGE 6	22SO - Standard	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	SF - Silicone Frosted	NA - See Page 4 for orderable mounting accessories	WH - White BK - Black RED - Red GRN - Green BLU - Blue	INJECTION MOLD IME - End Feed 1 IMB - Back Feed 1 IMSA - Side 1 Feed NPF - No Power Feed ³	INJECTION MOLD IME - End Feed 1 IMB - Back Feed 1 IMSA - Side 1 Feed NPF - No Power Feed ³
				33MO - Medium	26K - 2600K 42K - 4200K	BL - Black Lens	NA - See Page 4 for orderable mounting accessories	BK - Black	Feeds come with 118" wire leads	

¹ - Title 24 JA8 compliance achievable, contact factory for specific requests

² - Red, Green, and Blue finishes have an MOQ of 350ft

³ - NPF-NPF for Feed Position 1&2 is not a valid configuration option



Kurba Medium Horizontal Static White

Field Bendable 24V System



Powerfeeds and Connectors

Power Feed Position Options and Orientation




NOTE: IMSB - Side 2 Feed not available with HB - Horizontal Bending

Linking and Extension Cable Options

END CONNECTOR

Injection-molded End Connector


-IME

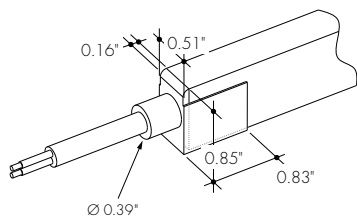

BACK CONNECTOR

Injection-molded Back Connector


-IMB



SIDE CONNECTOR

Injection-molded Side Connector


-IMSA



ENDCAP (NO CONNECTOR)


Injection-molded Cap (No Connector)

-NPF



ANTI-WICKING FERRULE

Included on every power feed wire

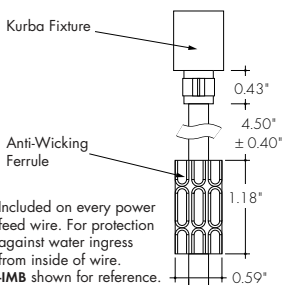

Included on every power feed wire. For protection against water ingress from inside of wire. -IMB shown for reference.




Kurba Medium Horizontal Static White

Field Bendable 24V System




Product Dimensions


Kurba Medium Cross Sections




Example Feed Position
IME - NPF
End Feed 1 to
No Power Feed





Example Feed Position
IMSA - NPF
Side 1 Feed to
No Power Feed



Example Feed Position
IMB - NPF
Back Feed 1 to
No Power Feed




Example Feed Position
IME - IME
End Feed 1 and
End Feed 1

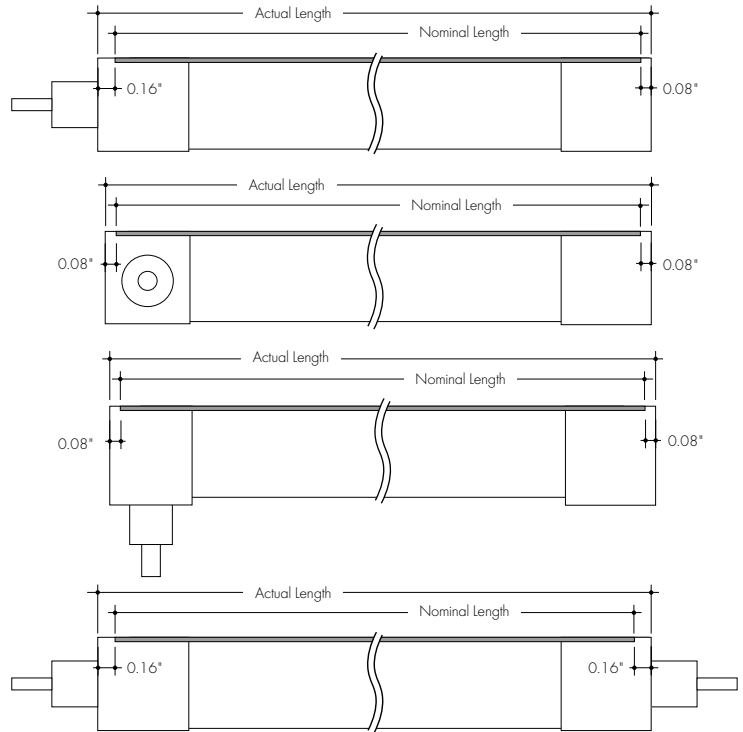

Finish Options

- A wide variety of finish options allowing complete customization of style and aesthetic.
- Red, Green, and Blue finishes have an minimum order quantity of 350ft

White
Base




Kurba's base finish is a crisp white which brings a timeless, clean aesthetic that brightens and enhances any space

Black Finish w/ Black Lens
Premium




Also available with a blackout aesthetic - the Black Lens paired with the Black Finish provides for a sleek, all black profile that keeps the strip concealed in the off-state.

Red
Premium




Red adds a bright and bold statement, perfect for creating a striking and dynamic ambiance with its vibrancy

Green
Premium



Green embraces a refreshing and natural feel, reminiscent of emerald green, add touch of tranquility and harmony to your space with this option

Blue
Premium

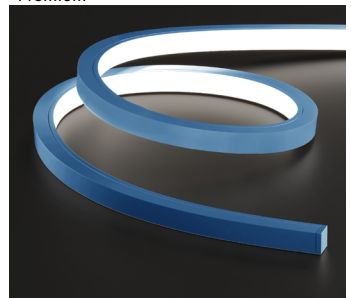

Blue evokes the serenity of the deep sea by combining vivid cobalt and azure tones.



Kurba Medium Horizontal Static White

Field Bendable 24V System



Light Transmission and Dotting

Output Options	Lens/Accessory					
	Silicone Frosted/ White Finish	Silicone Frosted/ Red Finish	Silicone Frosted/ Green Finish	Silicone Frosted/ Blue Finish	Silicone Frosted/ Black Finish	Black Lens/ Black Finish
22SO	ND	ND	ND	ND	ND	N/A
33SO	N/A	N/A	N/A	N/A	N/A	ND
Transmission Percentage	100%	80%	80%	80%	80%	100%





CD SD ND
CD - Clear Dotting
SD - Slight Dotting
ND - No Dotting

Mounting Accessories & Optional Connectors

MC-KBM-SAP-SM-0.8-SA



KBM Mounting Channel, Serrated Aluminum Profile, Surface Mount, 0.8in, Silver Anodized



For use with light strip mounted to the ceiling. 1 recommended every 8 in.

MC-KBM-SAP-SM-78-SA



KBM Mounting Channel, Serrated Aluminum Profile, Surface Mount, 78in, Silver Anodized

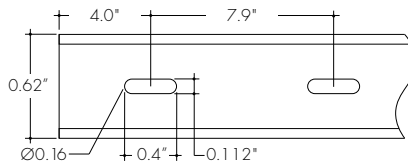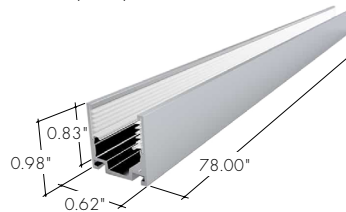

For use with light strip mounted to the ceiling.

MC-KBM-FSAP-TR-78-SA


KBM Mounting Channel, Flanged Serrated Aluminum Profile, Trimmed Recessed Mount, 78in, Silver Anodized

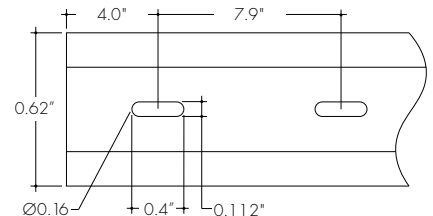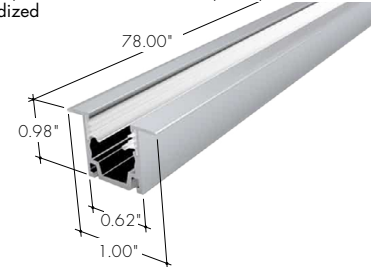

Flanged aluminum mounting channel providing grip. For use with light strip recessed into the ceiling.

MC-KBM-BSAP-HB-SM-38-SA


KBM Mounting Channel, Bendable Serrated Aluminum Profile, Horizontal Bending, Surface Mount, 38in, Silver Anodized

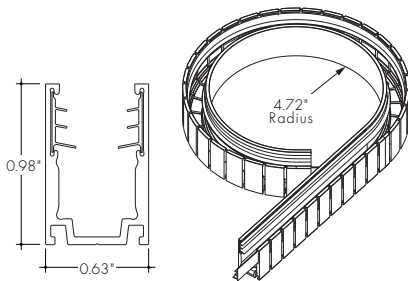

Bendable stainless steel mounting channel providing grip. For use with light strip mounted to the ceiling. **NOTE:** Compatible with IMB - Back Feed only

MC-KBM-RCWY-SM-78-SA


KBM Mounting Channel, Raceway, Surface Mount, 78in, Silver Anodized

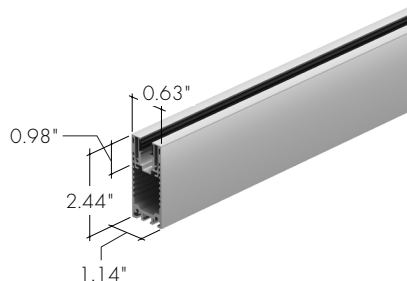

Raceway channel allows for hidden cable management and is a superb option where tidiness is required. **NOTE:** Compatible with IMB - Back Feed only


LVSP-WET

Splice box: wet rated, low voltage, gray

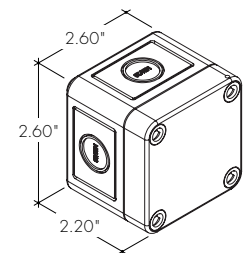

LVSP-WET-CM

Connector for splice box, low voltage for cable management, gray





Kurba Medium Horizontal Static White


Field Bendable 24V System



Photometry


KBM-W-HB-48-22SO-30K-SF-NA-WH

Kurba Medium, Horizontal Bend, 4ft, 3000K, 22SO, Silicone Frosted Lens

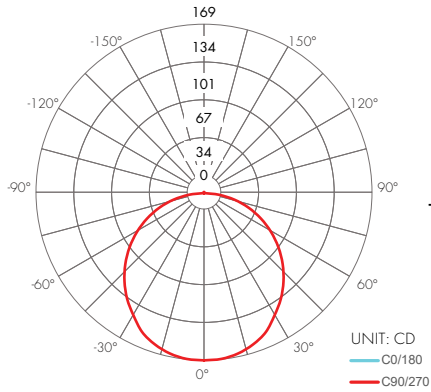

Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	130	26.7%
0-40	179	36.6%
0-60	376	77.1%
0-90	487	99.8%
Total	488	100.0%






2250 | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry.
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2". Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"


A - End Connector at both ends of Kurba (0.16" + 0.16" added to overall length)
 B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (0.16" + 0.08" added to overall length)
 C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (0.08" + 0.08" added to overall length)

Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)			
	W	A	B	C		W	A	B	C		W	A	B	C
7	2.1	6.9	6.8	6.7	125	38.1	125.0	124.9	124.8	243	74.1	243.1	243.0	242.9
10	3.1	10.2	10.1	10.0	128	39.1	128.3	128.2	128.1	246	75.1	246.4	246.3	246.2
(1 ft) 14	4.1	13.4	13.4	13.3	(11 ft) 132	40.1	131.5	131.5	131.4	250	76.1	249.7	249.6	249.5
17	5.1	16.7	16.6	16.6	135	41.1	134.8	134.7	134.7	(21 ft) 253	77.1	252.9	252.9	252.8
20	6.1	20.0	19.9	19.8	138	42.1	138.1	138.0	137.9	256	78.1	256.2	256.1	256.1
(2 ft) 23	7.1	23.3	23.2	23.1	141	43.1	141.4	141.3	141.2	260	79.1	259.5	259.4	259.3
27	8.1	26.6	26.5	26.4	(12 ft) 145	44.1	144.7	144.6	144.5	(22 ft) 263	80.1	262.8	262.7	262.6
30	9.1	29.8	29.8	29.7	148	45.1	148.0	147.9	147.8	266	81.1	266.1	266.0	265.9
33	10.1	33.1	33.0	33.0	151	46.1	151.2	151.2	151.1	269	82.1	269.3	269.3	269.2
(3 ft) 36	11.1	36.4	36.3	36.2	(13 ft) 155	47.1	154.5	154.4	154.4	273	83.1	272.6	272.5	272.5
40	12.1	39.7	39.6	39.5	158	48.1	157.8	157.7	157.6	(23 ft) 276	84.1	275.9	275.8	275.7
43	13.1	43.0	42.9	42.8	161	49.1	161.1	161.0	160.9	279	85.1	279.2	279.1	279.0
46	14.1	46.2	46.2	46.1	164	50.1	164.4	164.3	164.2	282	86.1	282.5	282.4	282.3
(4 ft) 50	15.1	49.5	49.5	49.4	(14 ft) 168	51.1	167.6	167.6	167.5	286	87.1	285.7	285.7	285.6
53	16.1	52.8	52.7	52.7	171	52.1	170.9	170.8	170.8	(24 ft) 289	88.1	289.0	288.9	288.9
56	17.1	56.1	56.0	55.9	174	53.1	174.2	174.1	174.0	292	89.1	292.3	292.2	292.1
(5 ft) 59	18.1	59.4	59.3	59.2	178	54.1	177.5	177.4	177.3	296	90.1	295.6	295.5	295.4
63	19.1	62.7	62.6	62.5	(15 ft) 181	55.1	180.8	180.7	180.6	(25 ft) 299	91.1	298.9	298.8	298.7
66	20.1	65.9	65.9	65.8	184	56.1	184.0	184.0	183.9	302	92.1	302.1	302.1	302.0
69	21.1	69.2	69.1	69.1	187	57.1	187.3	187.2	187.2	305	93.1	305.4	305.3	305.3
(6 ft) 73	22.1	72.5	72.4	72.3	(16 ft) 191	58.1	190.6	190.5	190.4	309	94.1	308.7	308.6	308.5
76	23.1	75.8	75.7	75.6	194	59.1	193.9	193.8	193.7	(26 ft) 312	95.1	312.0	311.9	311.8
79	24.1	79.1	79.0	78.9	197	60.1	197.2	197.1	197.0					
(7 ft) 82	25.1	82.3	82.3	82.2	200	61.1	200.4	200.4	200.3	Note: all values are rounded to the nearest 0.1 inch				
86	26.1	85.6	85.5	85.5	(17 ft) 204	62.1	203.7	203.6	203.6					
89	27.1	88.9	88.8	88.7	207	63.1	207.0	206.9	206.8					
92	28.1	92.2	92.1	92.0	210	64.1	210.3	210.2	210.1					
(8 ft) 96	29.1	95.5	95.4	95.3	214	65.1	213.6	213.5	213.4					
99	30.1	98.7	98.7	98.6	(18 ft) 217	66.1	216.8	216.8	216.7					
102	31.1	102.0	101.9	101.9	220	67.1	220.1	220.0	220.0					
105	32.1	105.3	105.2	105.1	223	68.1	223.4	223.3	223.2					
(9 ft) 109	33.1	108.6	108.5	108.4	(19 ft) 227	69.1	226.7	226.6	226.5					
112	34.1	111.9	111.8	111.7	230	70.1	230.0	229.9	229.8					
115	35.1	115.1	115.1	115.0	233	71.1	233.3	233.2	233.1					
(10 ft) 118	36.1	118.4	118.3	118.3	237	72.1	236.5	236.5	236.4					
122	37.1	121.7	121.6	121.5	(20 ft) 240	73.1	239.8	239.7	239.7					


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB





Kurba Medium Horizontal Static White

Field Bendable 24V System




3350 | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry.
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2". Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"
A - End Connector at both ends of Kurba (0.16" + 0.16" added to overall length)
B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (0.16" + 0.08" added to overall length)
C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (0.08" + 0.08" added to overall length)


Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)				Nominal Length (in)	Actual Length (in)			
	W	A	B	C		W	A	B	C		W	A	B	C		W	A	B	C
7	2.1	6.9	6.8	6.7	86	26.1	85.6	85.5	85.5	164	50.1	164.4	164.3	164.2	243	74.1	243.1	243.0	243.0
9	2.8	9.1	9.0	8.9	88	26.8	87.8	87.7	87.7	166	50.8	166.6	166.5	166.4	245	74.8	245.3	245.2	245.1
11	3.4	11.3	11.2	11.1	90	27.4	90.0	89.9	89.8	(14ft) 169	51.4	168.7	168.7	168.6	248	75.5	247.5	247.4	247.3
(1ft) 13	4.1	13.4	13.4	13.3	92	28.1	92.2	92.1	92.0	171	52.1	170.9	170.9	170.8	250	76.1	249.7	249.6	249.5
16	4.8	15.6	15.6	15.5	94	28.8	94.4	94.3	94.2	173	52.8	173.1	173.0	173.0	(21ft) 252	76.8	251.9	251.8	251.7
18	5.4	17.8	17.7	17.7	(8ft) 97	29.4	96.6	96.5	96.4	175	53.4	175.3	175.2	175.2	254	77.5	254.1	254.0	253.9
20	6.1	20.0	19.9	19.8	99	30.1	98.8	98.7	98.6	177	54.1	177.5	177.4	177.3	256	78.1	256.2	256.2	256.1
22	6.8	22.2	22.1	22.0	101	30.8	100.9	100.9	100.8	(15ft) 180	54.8	179.7	179.6	179.5	258	78.8	258.4	258.4	258.3
(2ft) 24	7.4	24.4	24.3	24.2	103	31.4	103.1	103.0	103.0	182	55.4	181.9	181.8	181.7	261	79.5	260.6	260.5	260.5
26	8.1	26.6	26.5	26.4	105	32.1	105.3	105.2	105.2	184	56.1	184.1	184.0	183.9	263	80.1	262.8	262.7	262.6
29	8.8	28.8	28.7	28.6	(9ft) 107	32.8	107.5	107.4	107.3	186	56.8	186.2	186.2	186.1	(22ft) 265	80.8	265.0	264.9	264.8
31	9.4	30.9	30.9	30.8	110	33.4	109.7	109.6	109.5	188	57.5	188.4	188.4	188.3					
33	10.1	33.1	33.1	33.0	112	34.1	111.9	111.8	111.7	191	58.1	190.6	190.5	190.5					
35	10.8	35.3	35.2	35.2	114	34.8	114.1	114.0	113.9	(16ft) 193	58.8	192.8	192.7	192.7					
(3ft) 37	11.4	37.5	37.4	37.3	116	35.4	116.3	116.2	116.1	195	59.5	195.0	194.9	194.8					
40	12.1	39.7	39.6	39.5	118	36.1	118.4	118.4	118.3	197	60.1	197.2	197.1	197.0					
42	12.8	41.9	41.8	41.7	(10ft) 121	36.8	120.6	120.5	120.5	199	60.8	199.4	199.3	199.2					
44	13.4	44.1	44.0	43.9	123	37.4	122.8	122.7	122.7	201	61.5	201.6	201.5	201.4					
46	14.1	46.3	46.2	46.1	125	38.1	125.0	124.9	124.8	(17ft) 204	62.1	203.7	203.7	203.6					
(4ft) 48	14.8	48.4	48.4	48.3	127	38.8	127.2	127.1	127.0	206	62.8	205.9	205.9	205.8					
51	15.4	50.6	50.6	50.5	129	39.4	129.4	129.3	129.2	208	63.5	208.1	208.0	208.0					
53	16.1	52.8	52.7	52.7	(11ft) 131	40.1	131.6	131.5	131.4	210	64.1	210.3	210.2	210.2					
55	16.8	55.0	54.9	54.8	134	40.8	133.8	133.7	133.6	212	64.8	212.5	212.4	212.3					
57	17.4	57.2	57.1	57.0	136	41.4	135.9	135.9	135.8	215	65.5	214.7	214.6	214.5					
59	18.1	59.4	59.3	59.2	138	42.1	138.1	138.0	138.0	(18ft) 217	66.1	216.9	216.8	216.7					
(5ft) 61	18.8	61.6	61.5	61.4	140	42.8	140.3	140.2	140.2	219	66.8	219.1	219.0	218.9					
64	19.4	63.8	63.7	63.6	(12ft) 143	43.4	142.5	142.4	142.3	221	67.5	221.2	221.2	221.1					
66	20.1	65.9	65.9	65.8	145	44.1	144.7	144.6	144.5	223	68.1	223.4	223.4	223.3					
68	20.8	68.1	68.0	68.0	147	44.8	146.9	146.8	146.7	226	68.8	225.6	225.5	225.5					
70	21.4	70.3	70.2	70.2	149	45.4	149.1	149.0	148.9	(19ft) 228	69.5	227.8	227.7	227.6					
(6ft) 72	22.1	72.5	72.4	72.3	151	46.1	151.3	151.2	151.1	230	70.1	230.0	229.9	229.8					
75	22.8	74.7	74.6	74.5	153	46.8	153.4	153.4	153.3	232	70.8	232.2	232.1	232.0					
77	23.4	76.9	76.8	76.7	(13ft) 156	47.4	155.6	155.5	155.5	234	71.5	234.4	234.3	234.2					
79	24.1	79.1	79.0	78.9	158	48.1	157.8	157.7	157.7	237	72.1	236.6	236.5	236.4					
81	24.8	81.3	81.2	81.1	160	48.8	160.0	159.9	159.8	239	72.8	238.7	238.7	238.6					
(7ft) 83	25.4	83.4	83.4	83.3	162	49.4	162.2	162.1	162.0	(20ft) 241	73.5	240.9	240.9	240.8					

Note: all values are rounded to the nearest 0.1 inch


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB





Kurba Medium Horizontal Static White

Field Bendable 24V System



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code Universal Dimming Power Supplies 1% 120VAC - 277VAC



MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI-0-10V Dimming, Phase Dimming	D-Dry W-Wet	30-30 Watts 60-60 Watts 96-96 Watts 3x96-3x96 Watts	24-24 VDC

Compatibility: View a complete list of compatible dimmers on product page [Link](#)

0-10V - 1% dimming
MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-W-30W	PS-UNI-W-60W	PS-UNI-W-96W	PS-UNI-W-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

MODELS	PS-UNI-D-30W	PS-UNI-D-60W	PS-UNI-D-96W	PS-UNI-D-3X96W
Length	8.77"	8.77"	8.11"	9.94"
Width	4.27"	4.27"	5.60"	7.61"
Depth	1.83"	1.83"	1.83"	2.02"

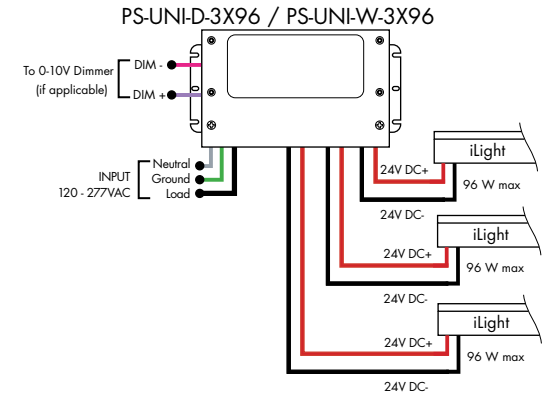
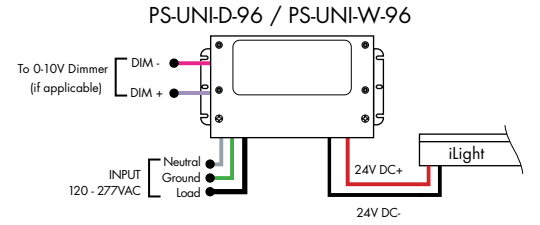


For use with Static White

0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	POWER	OUTPUT	INPUT CONTROL	ENVIRONMENT
PS-Power Supply, 120-277VAC	96-96 Watts 3x96-3x96 Watts	24-24 VDC	010V-LIN-0-10V Dimming (0.1%), Linear 010V-LOG-0-10V Dimming (0.1%), Logarithmic	D-Dry

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

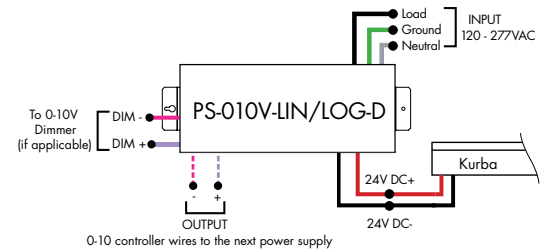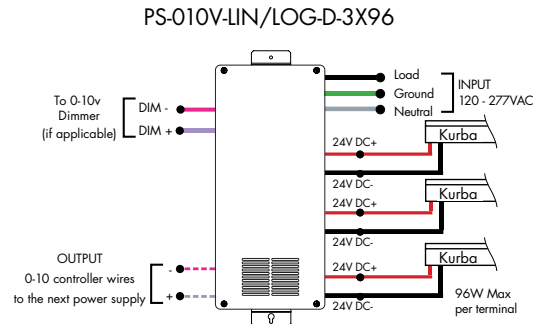



Kurba Medium Horizontal Static White

Field Bendable 24V System




Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-LIN-0-10V Dimming (0.1%), Linear 010V-LOG-0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24-24 VDC	AWNDR-Athena

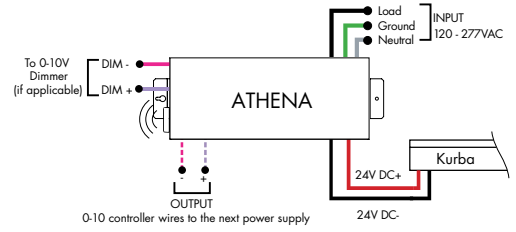


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White

Ordering Code Phase Dimming Power Supply 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	OUTPUT CONTROL
PS-Power Supply, 120-277VAC	PH-Phase Dimming (Triac, ELV, MLV)	D-Dry	96-96 Watts	24-24 VDC	DC-Direct Current

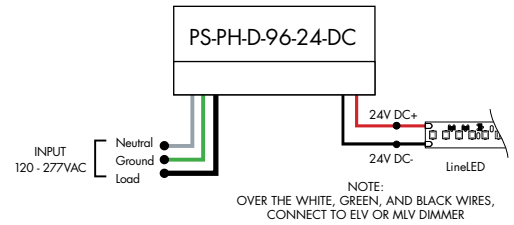


MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart ([link](#))

MODELS	96W
Length	8.25"
Width	4.10"
Depth	1.56"


For use with Static White

DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI-DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

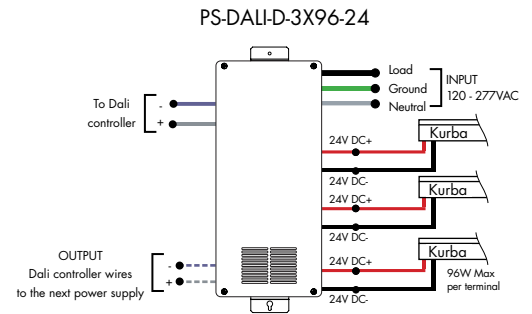

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

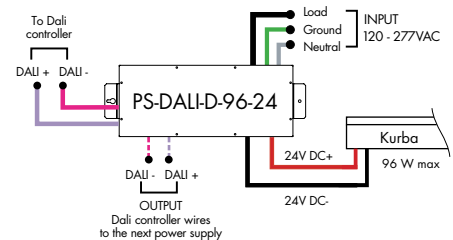



Kurba Medium Horizontal Static White

Field Bendable 24V System




Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-0-10V Dimming (1%)	D-Dry	96-96 Watts	24-24 VDC	ENL-0-10V Enlightened

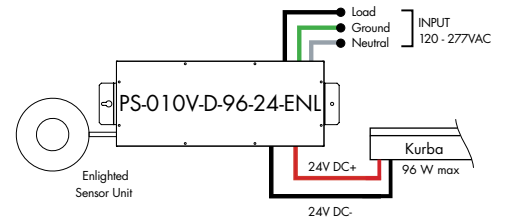


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White


Requires Zonal Control

DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

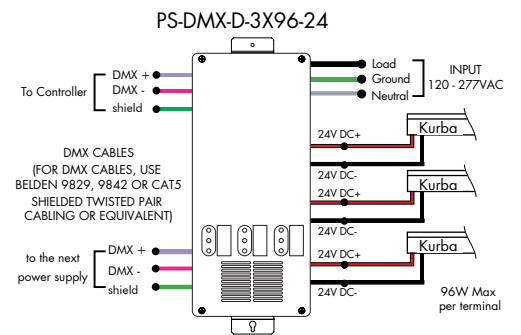


MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

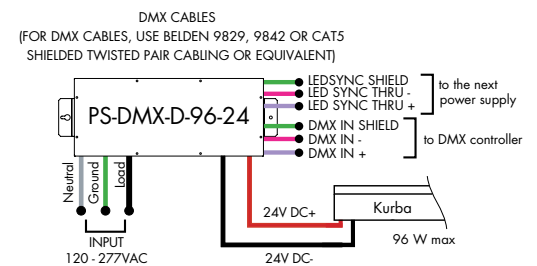

For use with Static White

DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

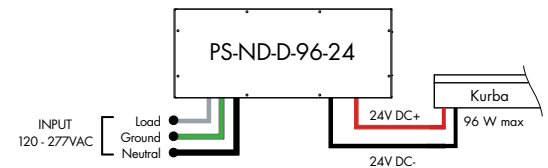

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"



Kurba Medium Horizontal Static White

Field Bendable 24V System



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White


In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC
PS240				
PS277				

PS120-Power Supply, 120VAC
 PS240-Power Supply, 240VAC
 PS277-Power Supply, 277VAC

MODELS 2X96W

Length	8.40"
Width	8.30"
Depth	8.10"

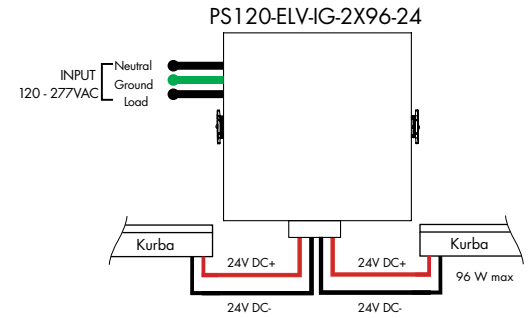

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 1%


MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver
40W max

MODELS L3DA4U1UKL-CV240

Length	4.98"
Width	4.00"
Depth	2.62"

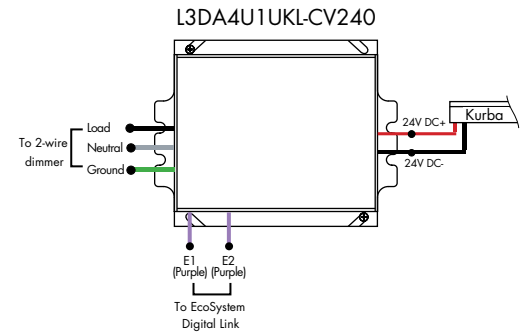

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™
96W max

MODELS L3D0

Length	10.50"
Width	5.50"
Depth	2.00"

