

**Features**

Kurba Small is a direct view, small profile, energy efficient and flexible LED strip suitable for outdoor wet locations capable of horizontal/side bends and vertical/top bends with a 2" bending radius. The silicone material offers excellent heat, weather, UV, and solvent resistance and has a special coating to repel dust and dirt accumulation.

**Applications**

Indoor/Outdoor dry & wet location

**Materials**

Silicone for red list approved, as well as heat, weather, UV, and solvent resistance

**Dimming**

Dot Free even illumination. Also available with Black Lens

**Average Life (L70)**


50,000 Hours

**Approvals**

24VDC Class 2 wet listed, IP67

**Warranty**

3 years



**Finish Options** (see page 2 for additional information)

**Base**  White

**Premium**  Black



**Technical Information**


Bending Direction	Horizontal		Vertical		60SO (Black Lens Only)	CCT INFO / LUMEN MULTIPLIER	
	Output	44SO	44HO	44SO		44HO	Color Temperature
Light Output at 3000K	85 lm/ft	163 lm/ft	96 lm/ft	180 lm/ft	16 lm/ft	2200K	0.93
Average Power Consumption at 4'	1.37 W/ft	2.74 W/ft	1.37 W/ft	2.74 W/ft	1.37 W/ft	2400K	1.00
Efficacy	62 lm/W	59 lm/W	70 lm/W	66 lm/W	12 lm/W	2700K	1.00
Ordering Increment	3.28"		3.28"		1.4"	3000K	1.06
Maximum Run Length (In Series)	49'	24'	49'	24'	33'	3500K	1.06
Operating Temperature	-40°F to 149°F	-40°F to 131°F	-40°F to 149°F	-40°F to 131°F	-40°F to 149°F	4000K	1.00

**Note: 80 CRI**

**Constraints**

**Horizontal Bend Direction**


Bend LED in these positions only to avoid damage



Illuminated surface shown in gray

**Horizontal Prohibited Bends**

Twisting or bending LED in these positions will cause damage




Illuminated surface shown in gray

Do not make sharp bends near the endcap

**Vertical Bend Direction**


Bend LED in these positions only to avoid damage

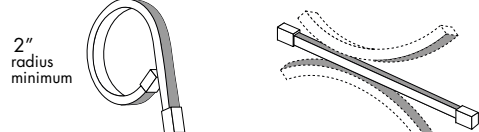

Illuminated surface shown in gray

**Vertical Prohibited Bends**

Twisting or bending LED in these positions will cause damage



Illuminated surface shown in gray

Do not make sharp bends near the endcap

**Ordering Code**


MODEL	RATING	BEND DIRECTION	LENGTH	OUTPUT <sup>1</sup>	CCT	LENS <sup>2</sup>	MOUNTING	FINISH	FEED POSITION LEFT	FEED POSITION RIGHT
KBS - Kurba Small	W - Wet	HB - Horizontal Bending VB - Vertical Bending	SEE PCC CHART ON PAGES 6 AND 8	44SO - Standard 44HO - High	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	SF - Silicone Frosted	NA - See Page 4 for orderable mounting accessories	WH - White	INJECTION MOLD IME - End Feed 1 IMB - Back Feed 1 IMSA - Side 1 Feed IMSB - Side 2 Feed <sup>3</sup> NPF - No Power Feed <sup>4</sup>	INJECTION MOLD IME - End Feed 1 IMB - Back Feed 1 IMSA - Side 1 Feed IMSB - Side 2 Feed <sup>3</sup> NPF - No Power Feed <sup>4</sup>
				60SO - Standard	26K - 2600K 42K - 4200K	BL - Black Lens <sup>2</sup>	NA - See Page 4 for orderable mounting accessories	BK - Black	Feeds come with 90" wire leads	

1 - Title 24 JA8 compliance achievable, contact factory for specific requests  
2 - BL Lens only available with VB - Vertical Bend Direction

3 - IMSB - Side 2 Feed not available with HB - Horizontal Bending  
4 - NPF-NPF for Feed Position 1&2 is not a valid configuration option

**Powerfeeds and Connectors**

**Power Feed Position Options and Orientation**

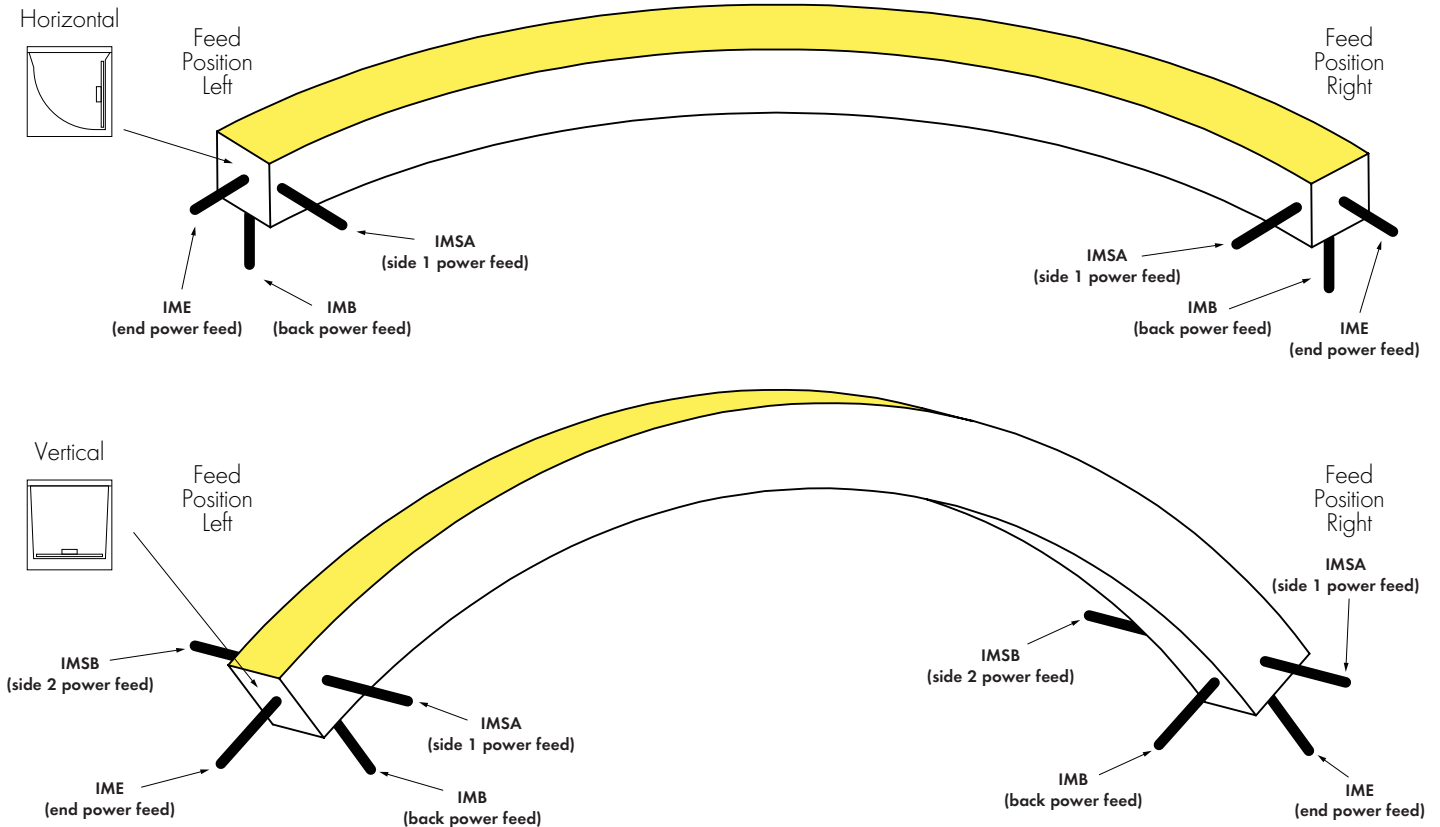


NOTE: IMSB - Side 2 Feed not available with HB - Horizontal Bending

**Linking and Extension Cable Options**


**END CONNECTOR**

Injection-molded End Connector  
-IME

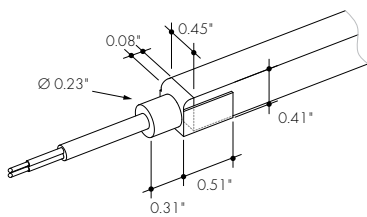


**BACK CONNECTOR**

Injection-molded Back Connector  
-IMB




**SIDE CONNECTOR**

Injection-molded Side Connector  
-IMSA and -IMSB




**ENDCAP (NO CONNECTOR)**

Injection-molded Cap (No Connector)  
-NPF





**ANTI-WICKING FERRULE**

Included on every power feed wire




**Product Dimensions**


Kurba Small Cross Sections




**Example Feed Position**  
**IME - NPF**  
 End Feed 1 to  
 No Power Feed








**Example Feed Position**  
**IMSA - NPF**  
 Side 1 Feed to  
 No Power Feed



**Example Feed Position**  
**IMB - NPF**  
 Back Feed 1 to  
 No Power Feed




**Example Feed Position**  
**IME - IME**  
 End Feed 1 and  
 End Feed 1

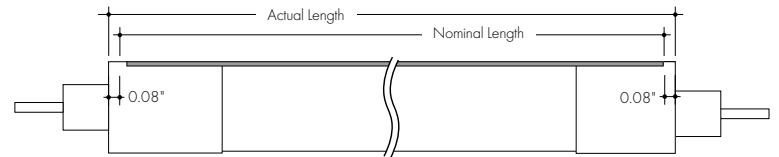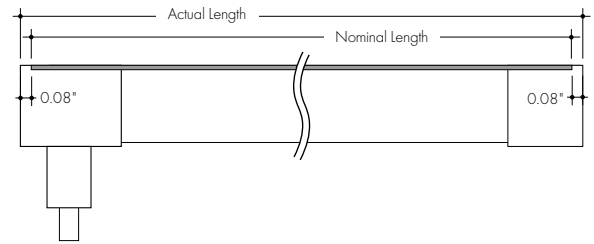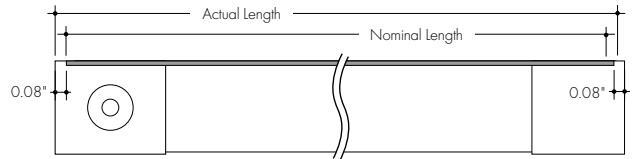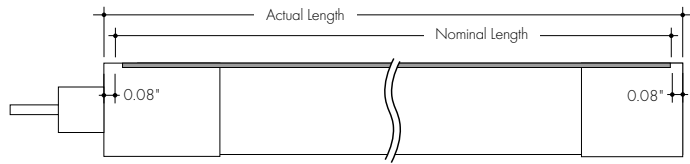

**Finish Options**

- Kurba’s base finish is a crisp white which brings a timeless, clean aesthetic that brightens and enhances any space.
- Also available with a blackout aesthetic - the Black Lens paired with the Black Finish provides for a sleek, all black profile that keeps the strip concealed in the off-state.

**White Base**



**Black Finish w/ Black Lens Premium**



Light Transmission and Dotting

Output Options	Lens/Accessory	
	Silicone Frosted/ White Finish	Black Lens/ Black Finish
44SO	ND	N/A
44HO	ND	N/A
60SO	N/A	ND
<b>Transmission Percentage</b>	100%	100%





CD - Clear Dotting  
SD - Slight Dotting  
ND - No Dotting

Mounting Accessories & Optional Connectors

**MC-KBS-SAP-SM-0.8-SA**



KBS Mounting Channel, Serrated Aluminum Profile, Surface Mount, 0.8in, Silver Anodized



Aluminum mounting bracket providing grip. For use with light strip mounted to the ceiling. 1 recommended every 8 in.

**MC-KBS-SAP-SM-78-SA**



KBS Mounting Channel, Serrated Aluminum Profile, Surface Mount, 78in, Silver Anodized

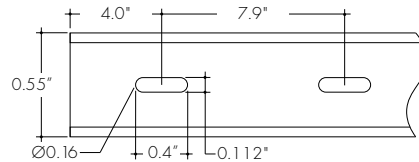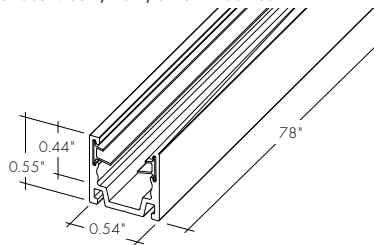

Aluminum mounting channel providing grip. For use with light strip mounted to the ceiling.

**MC-KBS-FSAP-TR-78-SA**


KBS Mounting Channel, Flanged Serrated Aluminum Profile, Trimmed Recessed Mount, 78in, Silver Anodized

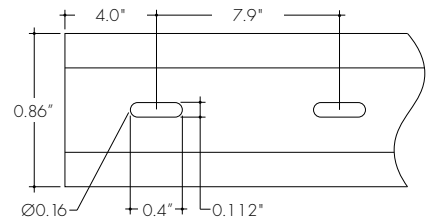

Flanged aluminum mounting channel providing grip. For use with light strip mounted to the ceiling.

**MC-KBS-BSAP-HB-SM-38-SA**


KBS Mounting Channel, Bendable Serrated Aluminum Profile, Horizontal Bending, Surface Mount, 38in, Silver Anodized

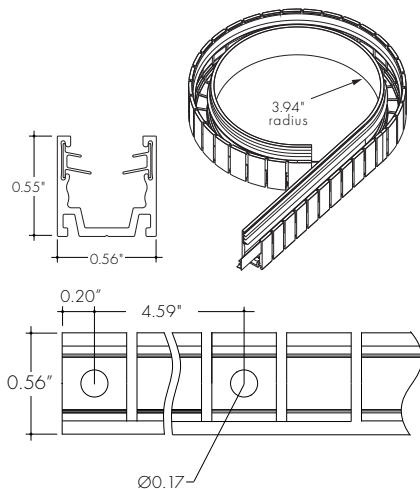

For use with light strip mounted to the ceiling.  
**NOTE:** For use with **HB** - Horizontal Bend only. Mounting Channel Bending Radius is 7.87" in opposite direction


**LVSP-WET**

Splice box: wet rated, low voltage, gray



**LVSP-WET-CM**


Connector for splice box, low voltage for cable management, gray



Photometry


KBS-W-HB-48-44HO-30K-SF-NA-WH

Kurba Small, Horizontal Bend, 4ft, 3000K, 44HO, Silicone Frosted Lens

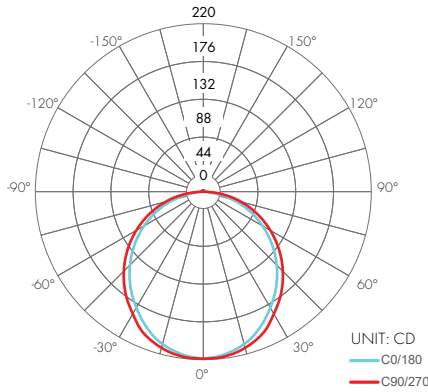

Zonal Lumen Summary 3000K


Zone	Lumen	% Fixture
0-30	170	26.0%
0-40	233	35.7%
0-60	491	75.2%
0-90	639	98.0%
<b>Total</b>	<b>652</b>	<b>100.0%</b>



UNIT: CD  
 — C0/180  
 — C90/270


KBS-W-VB-48-44HO-30K-SF-NA-WH

Kurba Small, Vertical Bend, 4ft, 3000K, 44HO, Silicone Frosted Lens

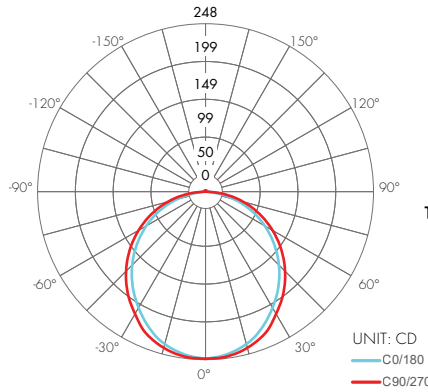

Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	191	26.5%
0-40	262	36.4%
0-60	552	76.6%
0-90	709	98.5%
<b>Total</b>	<b>720</b>	<b>100.0%</b>



UNIT: CD  
 — C0/180  
 — C90/270


### 44SO | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Acutal Length for Order Code Entry  
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"


Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)
7	0.8	6.7	125	14.3	124.8	243	27.8	242.9	(30 ft) 361	41.3	361.0	(40 ft) 479	54.8	479.1
10	1.1	10.0	128	14.6	128.1	246	28.1	246.2	365	41.7	364.3	483	55.2	482.4
(1 ft) 14	1.5	13.3	(11 ft) 132	15.0	131.4	250	28.5	249.5	368	42.0	367.6	486	55.5	485.7
17	1.9	16.6	135	15.4	134.7	(21 ft) 253	28.9	252.8	(31 ft) 371	42.4	370.9	489	55.9	489.0
20	2.3	19.8	138	15.8	137.9	256	29.3	256.1	374	42.8	374.2	(41 ft) 493	56.3	492.3
(2 ft) 23	2.6	23.1	141	16.1	141.2	260	29.6	259.3	378	43.2	377.4	496	56.7	495.5
27	3.0	26.4	(12 ft) 145	16.5	144.5	(22 ft) 263	30.0	262.6	381	43.5	380.7	499	57.0	498.8
30	3.4	29.7	148	16.9	147.8	266	30.4	265.9	(32 ft) 384	43.9	384.0	502	57.4	502.1
33	3.8	33.0	151	17.3	151.1	269	30.8	269.2	388	44.3	387.3	(42 ft) 506	57.8	505.4
(3 ft) 36	4.1	36.2	(13 ft) 155	17.6	154.4	273	31.2	272.5	391	44.7	390.6	509	58.2	508.7
40	4.5	39.5	158	18.0	157.6	(23 ft) 276	31.5	275.7	394	45.0	393.8	512	58.5	512.0
43	4.9	42.8	161	18.4	160.9	279	31.9	279.0	(33 ft) 397	45.4	397.1	(43 ft) 515	58.9	515.2
46	5.3	46.1	164	18.8	164.2	282	32.3	282.3	401	45.8	400.4	519	59.3	518.5
(4 ft) 50	5.6	49.4	(14 ft) 168	19.1	167.5	286	32.7	285.6	404	46.2	403.7	522	59.7	521.8
53	6.0	52.7	171	19.5	170.8	(24 ft) 289	33.0	288.9	(34 ft) 407	46.5	407.0	525	60.0	525.1
56	6.4	55.9	174	19.9	174.0	292	33.4	292.1	410	46.9	410.2	(44 ft) 529	60.4	528.4
(5 ft) 59	6.8	59.2	178	20.3	177.3	296	33.8	295.4	414	47.3	413.5	532	60.8	531.6
63	7.1	62.5	(15 ft) 181	20.6	180.6	(25 ft) 299	34.2	298.7	417	47.7	416.8	535	61.2	534.9
66	7.5	65.8	184	21.0	183.9	302	34.5	302.0	(35 ft) 420	48.0	420.1	(45 ft) 538	61.5	538.2
69	7.9	69.1	187	21.4	187.2	305	34.9	305.3	424	48.4	423.4	542	61.9	541.5
(6 ft) 73	8.3	72.3	(16 ft) 191	21.8	190.4	309	35.3	308.5	427	48.8	426.7	545	62.3	544.8
76	8.6	75.6	194	22.1	193.7	(26 ft) 312	35.7	311.8	430	49.2	429.9	548	62.7	548.0
79	9.0	78.9	197	22.5	197.0	315	36.0	315.1	(36 ft) 433	49.5	433.2	(46 ft) 552	63.0	551.3
(7 ft) 82	9.4	82.2	200	22.9	200.3	319	36.4	318.4	437	49.9	436.5	555	63.4	554.6
86	9.8	85.5	(17 ft) 204	23.3	203.6	322	36.8	321.7	440	50.3	439.8	558	63.8	557.9
89	10.1	88.7	207	23.6	206.8	(27 ft) 325	37.2	325.0	(37 ft) 443	50.7	443.1	561	64.2	561.2
92	10.5	92.0	210	24.0	210.1	328	37.5	328.2	447	51.0	446.3	(47 ft) 565	64.5	564.4
(8 ft) 96	10.9	95.3	214	24.4	213.4	332	37.9	331.5	450	51.4	449.6	568	64.9	567.7
99	11.3	98.6	(18 ft) 217	24.8	216.7	(28 ft) 335	38.3	334.8	453	51.8	452.9	571	65.3	571.0
102	11.6	101.9	220	25.1	220.0	338	38.7	338.1	(38 ft) 456	52.2	456.2	(48 ft) 575	65.7	574.3
105	12.0	105.1	223	25.5	223.2	342	39.0	341.4	460	52.5	459.5	578	66.0	577.6
(9 ft) 109	12.4	108.4	(19 ft) 227	25.9	226.5	345	39.4	344.6	463	52.9	462.7	581	66.4	580.8
112	12.8	111.7	230	26.3	229.8	(29 ft) 348	39.8	347.9	466	53.3	466.0	584	66.8	584.1
115	13.1	115.0	233	26.6	233.1	351	40.2	351.2	(39 ft) 470	53.7	469.3	(49 ft) 588	67.2	587.4
(10 ft) 118	13.5	118.3	237	27.0	236.4	355	40.5	354.5	473	54.0	472.6			
122	13.9	121.5	(20 ft) 240	27.4	239.7	358	40.9	357.8	476	54.4	475.9			

Note: all values are rounded to the nearest 0.1 inch


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB




### 44HO | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry  
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"


Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)
7	1.5	6.7	125	28.5	124.8	243	55.5	242.9
10	2.3	10.0	128	29.3	128.1	246	56.3	246.2
(1 ft) 14	3.0	13.3	(11 ft) 132	30.0	131.4	250	57.0	249.5
17	3.8	16.6	135	30.8	134.7	(21 ft) 253	57.8	252.8
20	4.5	19.8	138	31.5	137.9	256	58.5	256.1
(2 ft) 23	5.3	23.1	141	32.3	141.2	260	59.3	259.3
27	6.0	26.4	(12 ft) 145	33.0	144.5	(22 ft) 263	60.0	262.6
30	6.8	29.7	148	33.8	147.8	266	60.8	265.9
33	7.5	33.0	151	34.5	151.1	269	61.5	269.2
(3 ft) 36	8.3	36.2	(13 ft) 155	35.3	154.4	273	62.3	272.5
40	9.0	39.5	158	36.0	157.6	(23 ft) 276	63.1	275.7
43	9.8	42.8	161	36.8	160.9	279	63.8	279.0
46	10.5	46.1	164	37.5	164.2	282	64.6	282.3
(4 ft) 50	11.3	49.4	(14 ft) 168	38.3	167.5	286	65.3	285.6
53	12.0	52.7	171	39.0	170.8	(24 ft) 289	66.1	288.9
56	12.8	55.9	174	39.8	174.0			
(5 ft) 59	13.5	59.2	178	40.5	177.3			
63	14.3	62.5	(15 ft) 181	41.3	180.6			
66	15.0	65.8	184	42.0	183.9			
69	15.8	69.1	187	42.8	187.2			
(6 ft) 73	16.5	72.3	(16 ft) 191	43.5	190.4			
76	17.3	75.6	194	44.3	193.7			
79	18.0	78.9	197	45.0	197.0			
(7 ft) 82	18.8	82.2	200	45.8	200.3			
86	19.5	85.5	(17 ft) 204	46.5	203.6			
89	20.3	88.7	207	47.3	206.8			
92	21.0	92.0	210	48.0	210.1			
(8 ft) 96	21.8	95.3	214	48.8	213.4			
99	22.5	98.6	(18 ft) 217	49.5	216.7			
102	23.3	101.9	220	50.3	220.0			
105	24.0	105.1	223	51.0	223.2			
(9 ft) 109	24.8	108.4	(19 ft) 227	51.8	226.5			
112	25.5	111.7	230	52.5	229.8			
115	26.3	115.0	233	53.3	233.1			
(10 ft) 118	27.0	118.3	237	54.0	236.4			
122	27.8	121.5	(20 ft) 240	54.8	239.7			

Note: all values are rounded to the nearest 0.1 inch


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB




### 60SO | Power Consumption Per Fixture Length

Based on operation with PDCU series of power supplies. Use Actual Length for Order Code Entry  
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"


Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)
7	0.8	7.2	58	6.6	57.8	(8ft) 109	12.4	108.4	159	18.2	159.0	210	24.0	209.6
8	1.0	8.6	59	6.8	59.2	110	12.6	109.8	161	18.3	160.4	211	24.1	211.0
10	1.1	10.0	(5ft) 60	6.9	60.6	111	12.7	111.2	162	18.5	161.8	212	24.3	212.4
11	1.3	11.4	62	7.1	62.0	113	12.9	112.6	163	18.7	163.2	214	24.4	213.8
(1ft) 13	1.5	12.8	63	7.2	63.4	114	13.0	114.0	165	18.8	164.6	215	24.6	215.2
14	1.6	14.2	65	7.4	64.8	116	13.2	115.4	166	19.0	166.0	(18ft) 217	24.8	216.6
16	1.8	15.6	66	7.6	66.2	117	13.4	116.8	(14ft) 168	19.1	167.4	218	24.9	218.0
17	1.9	17.0	68	7.7	67.6	118	13.5	118.2	169	19.3	168.8	220	25.1	219.4
19	2.1	18.4	69	7.9	69.0	(10ft) 120	13.7	119.6	170	19.5	170.2	221	25.2	220.8
20	2.3	19.8	71	8.1	70.4	121	13.8	121.0	172	19.6	171.6	222	25.4	222.2
21	2.4	21.2	(6ft) 72	8.2	71.8	123	14.0	122.4	173	19.8	173.0	224	25.6	223.6
23	2.6	22.6	73	8.4	73.2	124	14.2	123.8	175	19.9	174.4	225	25.7	225.0
(2ft) 24	2.8	24.1	75	8.5	74.7	125	14.3	125.3	176	20.1	175.8	227	25.9	226.4
25	2.9	25.5	76	8.7	76.1	127	14.5	126.7	177	20.3	177.3	(19ft) 228	26.1	227.9
26	3.1	26.9	78	8.9	77.5	128	14.6	128.1	179	20.4	178.7	229	26.2	229.3
28	3.2	28.3	79	9.0	78.9	130	14.8	129.5	(15ft) 180	20.6	180.1	231	26.4	230.7
30	3.4	29.7	80	9.2	80.3	131	15.0	130.9	182	20.7	181.5	232	26.5	232.1
31	3.6	31.1	82	9.3	81.7	(11ft) 132	15.1	132.3	183	20.9	182.9	234	26.7	233.5
32	3.7	32.5	83	9.5	83.1	134	15.3	133.7	184	21.1	184.3	235	26.9	234.9
34	3.9	33.9	(7ft) 85	9.7	84.5	135	15.4	135.1	186	21.2	185.7	236	27.0	236.3
35	4.0	35.3	86	9.8	85.9	137	15.6	136.5	187	21.4	187.1	238	27.2	237.7
(3ft) 37	4.2	36.7	87	10.0	87.3	138	15.8	137.9	189	21.6	188.5	239	27.3	239.1
38	4.4	38.1	89	10.1	88.7	139	15.9	139.3	190	21.7	189.9	(20ft) 241	27.5	240.5
39	4.5	39.5	90	10.3	90.1	141	16.1	140.7	191	21.9	191.3	242	27.7	241.9
41	4.7	40.9	92	10.5	91.5	142	16.2	142.1	(16ft) 193	22.0	192.7	243	27.8	243.3
42	4.8	42.3	93	10.6	92.9	(12ft) 144	16.4	143.5	194	22.2	194.1	245	28.0	244.7
44	5.0	43.7	94	10.8	94.3	145	16.6	144.9	196	22.4	195.5	246	28.1	246.1
45	5.2	45.1	(8ft) 96	10.9	95.7	146	16.7	146.3	197	22.5	196.9	248	28.3	247.5
46	5.3	46.5	97	11.1	97.1	148	16.9	147.7	198	22.7	198.3	249	28.5	248.9
(4ft) 48	5.5	47.9	99	11.3	98.5	149	17.1	149.1	200	22.8	199.7	251	28.6	250.3
49	5.6	49.4	100	11.4	100.0	151	17.2	150.5	201	23.0	201.1	(21ft) 252	28.8	251.7
51	5.8	50.8	102	11.6	101.4	152	17.4	152.0	203	23.2	202.6	253	28.9	253.2
52	6.0	52.2	103	11.7	102.8	153	17.5	153.4	(17ft) 204	23.3	204.0	255	29.1	254.6
53	6.1	53.6	104	11.9	104.2	155	17.7	154.8	205	23.5	205.4	256	29.3	256.0
55	6.3	55.0	106	12.1	105.6	(13ft) 156	17.9	156.2	207	23.6	206.8			
56	6.4	56.4	107	12.2	107.0	158	18.0	157.6	208	23.8	208.2			

Note: all values are rounded to the nearest 0.1 inch


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB






**60SO | Power Consumption Per Fixture Length cont.**

Based on operation with PDCU series of power supplies. Use Acutal Length for Order Code Entry  
 Tolerance for Actual Lengths less than 6 ft is +/- 0.2", Actual Lengths between 6 ft and 16 ft is +/- 0.3", and Actual Lengths greater than 16 ft is +/- 0.6"


Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)	Nominal Length (in)	W	Actual Length (in)
258	29.4	257.4	308	35.2	307.9	359	41.0	358.5
259	29.6	258.8	310	35.4	309.3	(30ft) 360	41.2	359.9
260	29.7	260.2	311	35.5	310.7	361	41.3	361.3
262	29.9	261.6	(26ft) 312	35.7	312.1	363	41.5	362.7
263	30.1	263.0	314	35.9	313.5	364	41.6	364.1
(22ft) 265	30.2	264.4	315	36.0	314.9	366	41.8	365.5
266	30.4	265.8	317	36.2	316.3	367	42.0	366.9
267	30.5	267.2	318	36.3	317.7	368	42.1	368.3
269	30.7	268.6	319	36.5	319.1	370	42.3	369.7
270	30.9	270.0	321	36.7	320.5	371	42.4	371.1
272	31.0	271.4	322	36.8	321.9	(31ft) 373	42.6	372.5
273	31.2	272.8	(27ft) 324	37.0	323.3	374	42.8	373.9
274	31.4	274.2	325	37.1	324.8	376	42.9	375.4
(23ft) 276	31.5	275.6	326	37.3	326.2	377	43.1	376.8
277	31.7	277.0	328	37.5	327.6	378	43.2	378.2
279	31.8	278.5	329	37.6	329.0	380	43.4	379.6
280	32.0	279.9	331	37.8	330.4	381	43.6	381.0
281	32.2	281.3	332	37.9	331.8	383	43.7	382.4
283	32.3	282.7	333	38.1	333.2	(32ft) 384	43.9	383.8
284	32.5	284.1	335	38.3	334.6	385	44.0	385.2
286	32.6	285.5	(28ft) 336	38.4	336.0	387	44.2	386.6
287	32.8	286.9	338	38.6	337.4	388	44.4	388.0
(24ft) 288	33.0	288.3	339	38.7	338.8	390	44.5	389.4
290	33.1	289.7	340	38.9	340.2	391	44.7	390.8
291	33.3	291.1	342	39.1	341.6	392	44.9	392.2
293	33.4	292.5	343	39.2	343.0	(33ft) 394	45.0	393.6
294	33.6	293.9	344	39.4	344.4			
296	33.8	295.3	346	39.5	345.8			
297	33.9	296.6	(29ft) 348	39.7	347.2			
298	34.1	298.0	349	39.9	348.6			
(25ft) 300	34.2	299.5	350	40.0	350.1			
301	34.4	300.9	352	40.2	351.5			
302	34.6	302.3	353	40.4	352.9			
304	34.7	303.7	355	40.5	354.3			
305	34.9	305.1	356	40.7	355.7			
307	35.0	306.5	357	40.8	357.1			

Note: all values are rounded to the nearest 0.1 inch


Endcap (No Connector) -NPF




End Connector -IME



Back Connector -IMB



Side Connector -IMSA and -IMSB



## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Ordering Code Universal Dimming Power Supplies 1% 120VAC - 277VAC



MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI-0-10V Dimming, Phase Dimming	D-Dry W-Wet	30-30 Watts 60-60 Watts 96-96 Watts 3x96-3x96 Watts	24-24 VDC

Compatibility: View a complete list of compatible dimmers on product page [\(Link\)](#)

0-10V - 1% dimming  
MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-W-30W	PS-UNI-W-60W	PS-UNI-W-96W	PS-UNI-W-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

MODELS	PS-UNI-D-30W	PS-UNI-D-60W	PS-UNI-D-96W	PS-UNI-D-3X96W
Length	8.77"	8.77"	8.11"	9.94"
Width	4.27"	4.27"	5.60"	7.61"
Depth	1.83"	1.83"	1.83"	2.02"

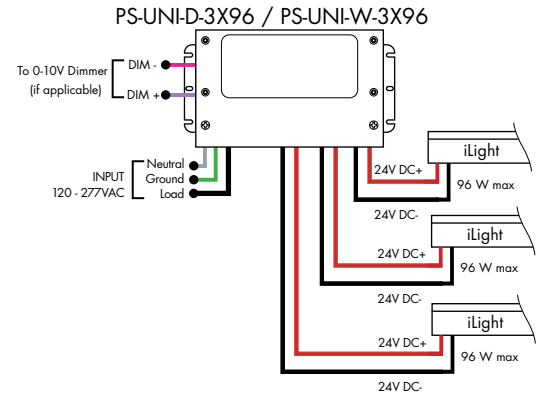
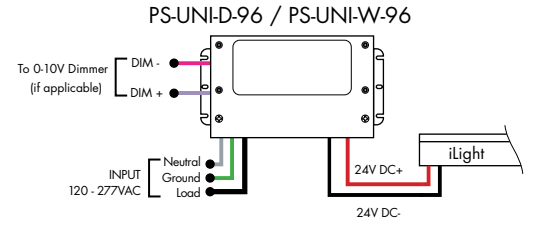


### For use with Static White

#### 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	POWER	OUTPUT	INPUT CONTROL	ENVIRONMENT
PS-Power Supply, 120-277VAC	96-96 Watts 3x96-3x96 Watts	24-24 VDC	010V-LIN-0-10V Dimming (0.1%), Linear 010V-LOG-0-10V Dimming (0.1%), Logarithmic	D-Dry

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

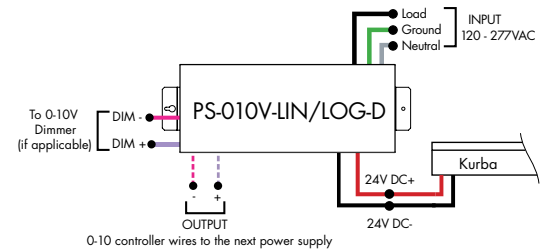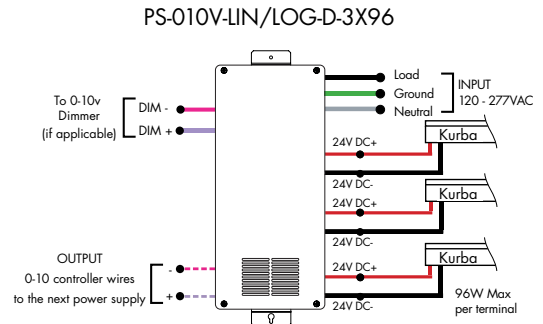


## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-LIN-0-10V Dimming (0.1%), Linear 010V-LOG-0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24-24 VDC	AWN-R-Athena

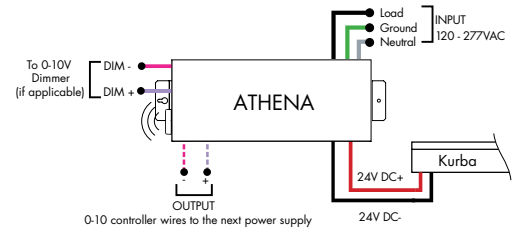


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

### For use with Static White

#### Ordering Code Phase Dimming Power Supply 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	OUTPUT CONTROL
PS-Power Supply, 120-277VAC	PH-Phase Dimming (Triac, ELV, MLV)	D-Dry	96-96 Watts	24-24 VDC	DC-Direct Current

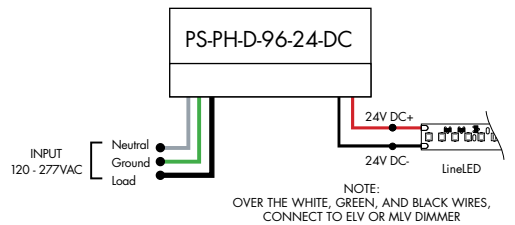


MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart ([link](#))

MODELS	96W
Length	8.25"
Width	4.10"
Depth	1.56"


### For use with Static White

#### DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI-DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

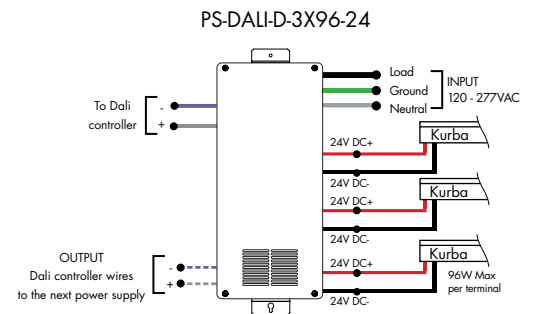

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

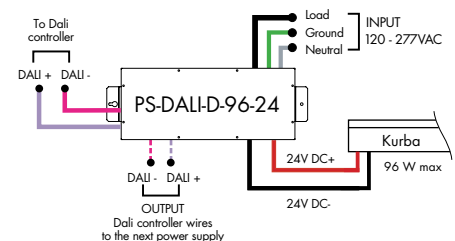

## Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-0-10V Dimming (1%)	D-Dry	96-96 Watts	24-24 VDC	ENL-0-10V Enlightened

<b>Model</b>	<b>96W</b>
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

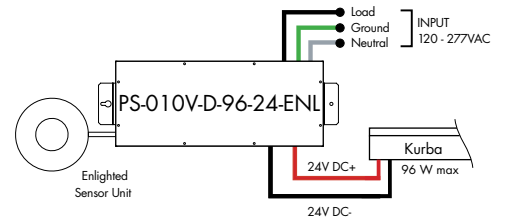



### For use with Static White

Requires Zonal Control

#### DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.56"

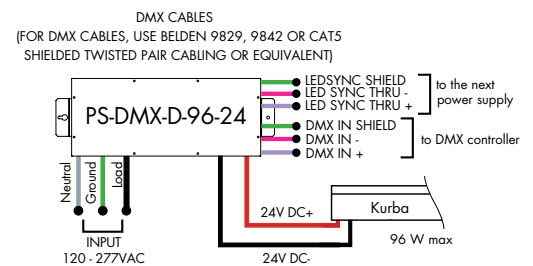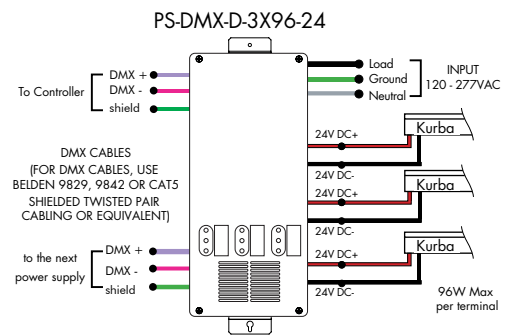


### For use with Static White

#### DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

<b>MODELS</b>	<b>96W</b>
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

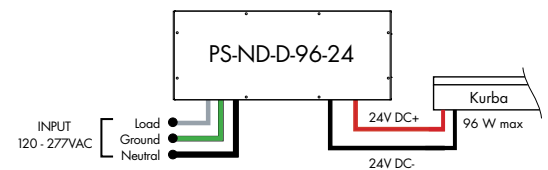

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White


#### In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

PS120-Power Supply, 120VAC  
 PS240-Power Supply, 240VAC  
 PS277-Power Supply, 277VAC

#### MODELS 2X96W

<b>Length</b>	8.40"
<b>Width</b>	8.30"
<b>Depth</b>	8.10"

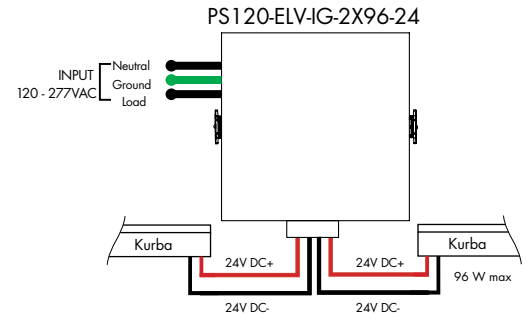

Luminii is a Lutron OEM Advantage Partner


#### Lutron Power Supplies 1%

MODEL

<b>L3DA4U1UKL-CV240</b>
-------------------------

HiLume™ 1% EcoSystem Voltage LED driver  
 40W max

MODELS	L3DA4U1UKL-CV240
<b>Length</b>	4.98"
<b>Width</b>	4.00"
<b>Depth</b>	2.62"

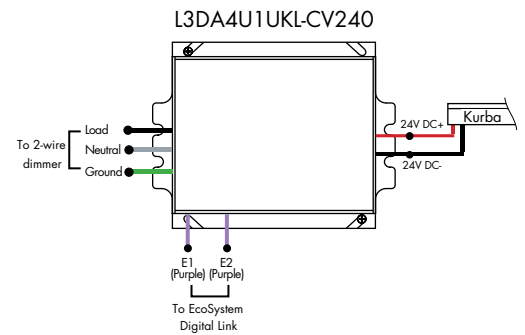

Luminii is a Lutron OEM Advantage Partner

#### Lutron Power Supplies 0.1%

MODEL

<b>L3D0-96W24V-U</b>
----------------------

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™  
 96W max

MODELS	L3D0
<b>Length</b>	10.50"
<b>Width</b>	5.50"
<b>Depth</b>	2.00"

