

# LETO 11 MINI

MONO POINT CYLINDER  
TUNABLE WHITE & WARM DIM




## Features

- Faceted metal reflectors provide beam spreads between 20° to 60°.
- Output available up to 1000 lumens.
- Nine drivers selections available to cover wide range of applications.
- Five year warranty.



## Finish Options

- White Silver Mocha Firebrick Warm Nickle
- Black Charcoal Cerulean Bronze Aged Brass

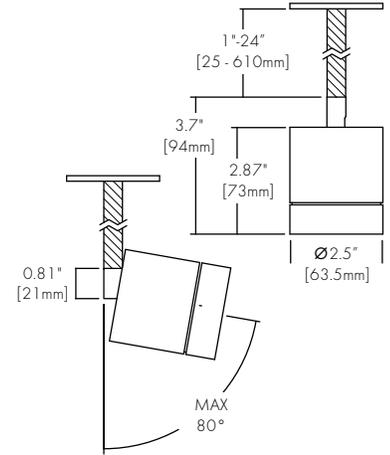

## Technical Information

TYPE	WD1830	TM-30				
<b>OUTPUT OPTIONS</b>	<b>700 lm (S)</b>	<b>CCT</b>	<b>CRI</b>	<b>R<sub>f</sub></b>	<b>R<sub>g</sub></b>	<b>R<sub>9</sub></b>
<b>Fixture wattage</b>	7.2 W	<b>1800K</b>	94	90	93	61
<b>Delivered Lumen</b>	819 lm	<b>3000K</b>	94	89	97	72
<b>Efficacy</b>	114 lm/W	<b>2700K</b>	91	90	96	59
<b>Center Beam Candlepower (20° Faceted Reflector)</b>	1517 cd	<b>6500K</b>	93	87	97	73

Integral Driver Example: Fixture LET11M-MP-S-07-WD1830-F20-NA-WH-WH-RDS-WH-SS01-WH-PHSD-NA

Remote Driver Example: Fixture LET11M-MP-S-07-WD1830-F20-NA-WH-WH-RDS-WH-SS01-WH-PHSD-NA-HRM-LET11M-MP-07-WD1830-PHSD-NA

## Ordering Code

MODEL	TYPE	SIZE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET11M-Leto 11 Mini	MP-Mono Point	S-Small	07-700 lumens (7.2W) <sup>2</sup>	WD1830-Warm Dim, 1800K-3000K	F20-20 Degree, Faceted F30-30 Degree, Faceted F60-60 Degree, Faceted	NA-No Accessory DL-Diffusing Lens	Standard WH-White BK-Black S-Silver  Premium <sup>1</sup> MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass	Standard WH-White BK-Black S-Silver  Premium <sup>1</sup> MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS <sup>5</sup>
RDS-Round Slim SQS-Square Slim RTL-Round Flangeless RDR-Round Semi-Recessed	Standard WH-White BK-Black S-Silver  Premium <sup>1</sup> MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass	SS01-Solid Stem, 1" SS06-Solid Stem, 6" SS1-Solid Stem, 12" SS2-Solid Stem, 24"	Standard WH-White BK-Black S-Silver  Premium <sup>1</sup> MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick BZ-Bronze WN-Warm Nickel AB-Aged Brass	PHSD-Forward/Reverse Phase, 1% Dimming, 120V Only 010S-0-10V, 1% Dimming, 120/277V 0103-0-10V, 1% Dimming, 347V Only <sup>3</sup> 010L-EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V <sup>3</sup> 010G-EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V <sup>3</sup> DALI-EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V <sup>3</sup> DALI8-EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V <sup>3</sup> LUTE-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V <sup>2,3</sup> DMX-EldoLED, DMX, 0.1% Dimming, 120V/277V <sup>3</sup>	NA-None EMG-Emergency Driver <sup>3,4</sup>

1 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

2 - LUTE driver is not available at 700 lumens.

3 - Drivers 0103/010L/010G/DALI/DALI8/DMX/LUTE/EMG are only available with HRM - Remote Power Supply.

4 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.

5 - A/WNR/CSMB available upon request.


CONTACT FACTORY FOR MORE OPTIONS.

# LETO 11 MINI


MONO POINT CYLINDER  
TUNABLE WHITE & WARM DIM

## Canopy


**RDS**  
Round Slim Canopy




**SQS**  
Square Slim Canopy



**RTL**  
Round Flangless Canopy



**RDR**  
Semi-Recessed

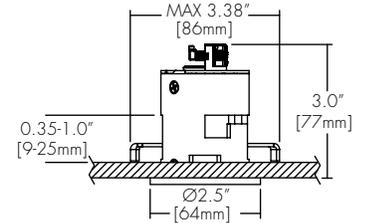

RDS or SQS	
Integral Drivers	PHSD, 010S
Remote Drivers	0103, 010L, 010G, DALI, DALI8, LUTE, DMX

RTL or RDR	
Integral Drivers	
Remote Drivers	PHSD, 010S, 0103, 010L, 010G, DALI, DALI8, LUTE, DMX

## Suspension

**SSX** (1", 6", 12", 24")  
Solid Stem



## Lens & Accessory Options

**DL**  
Diffusing Lens



## Optics

**FXX** (20°, 30°, 60°)  
Faceted Reflector



# LETO 11 MINI

MONO POINT CYLINDER  
TUNABLE WHITE & WARM DIM

## Remote Driver Housing


Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11M-MP-Leto 11 Mini Mono Point	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture

Maximum mounting distance to luminaire using 18 AWG wire							
010S	0103	PHSD	010L	010G	DALI	DMX	LUTE
16'	16'	16'	72'	72'	72'	149'	15'


## 4" J-box

Minimum volume required to mount drivers in junction box: 70mm x 40mm x 30mm.

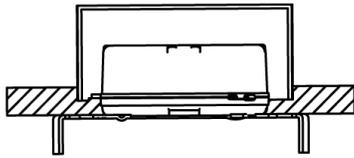


Canopy	+	Driver
RDS	+	PHSD
RDS	+	010S
SQS	+	PHSD
SQS	+	010S

## HRM Single with Externally Mounted Driver

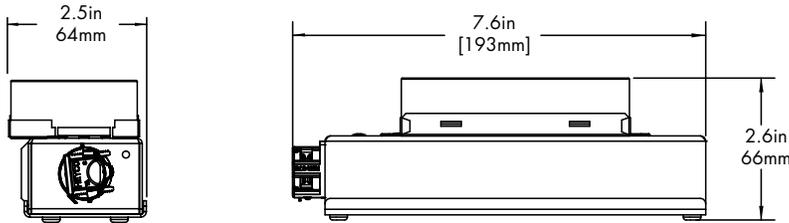


Driver
0103
010L
010G
010S
DALI
LUTE

## HRM Double

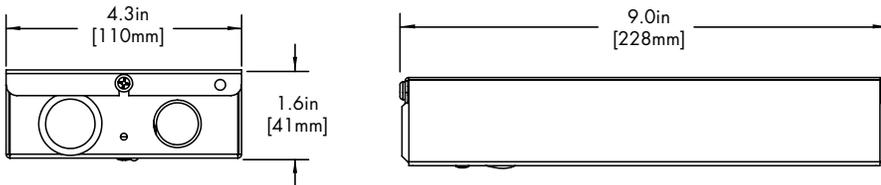

Driver
DALI8
DMX


## HRM Cylinder Driver

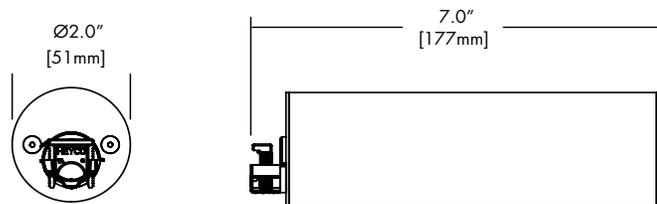

Canopy	+	Driver
RDR	+	010S
RDR	+	PHSD

## EMG Emergency Driver

120 minute EMG operation time.

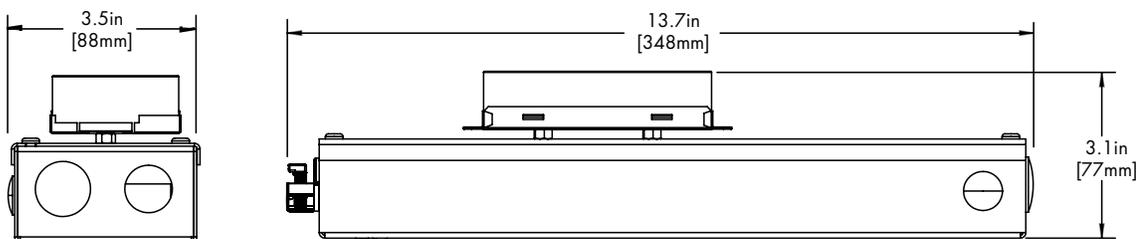

Driver
EMG

# LETO 11 MINI

MONO POINT CYLINDER  
TUNABLE WHITE & WARM DIM

## Standard Finishes

---

**BK**  
Black



**WH**  
White



**SL**  
Silver



## Premium Finishes

---

**MA**  
Mocha



**CC**  
Charcoal



**CR**  
Cerulean



**FB**  
Firebrick



**BZ**  
Bronze



**WN**  
Warm Nickle



**AB**  
Antique Bronze




# LETO 11 MINI

MONO POINT CYLINDER  
TUNABLE WHITE & WARM DIM

## TM-30

**Warm Dim 1800K**


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

**Warm Dim 3000K**


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

**Tunable White 2700K**


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

**Tunable White 6500K**



COLOR VECTOR GRAPHIC





— Reference Source — Test Source

## Photometry

**20° Faceted Reflector**

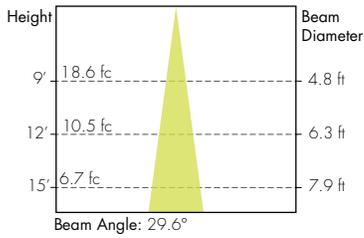

**30° Faceted Reflector**

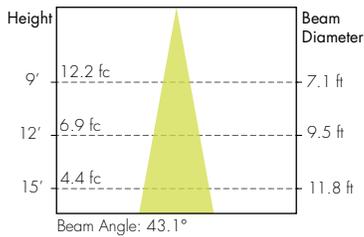

**60° Faceted Reflector**

