

Myka Wet - Installation Instructions

Models MKW-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SURFACE MOUNT ONLY
5. SUITABLE FOR WET LOCATIONS, MUST USE APPROPRIATE WEATHERPROOF RATED WIRE CONNECTORS.
6. INHERENTLY PROTECTED
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.




REVO.3
09142024


1 / 4



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

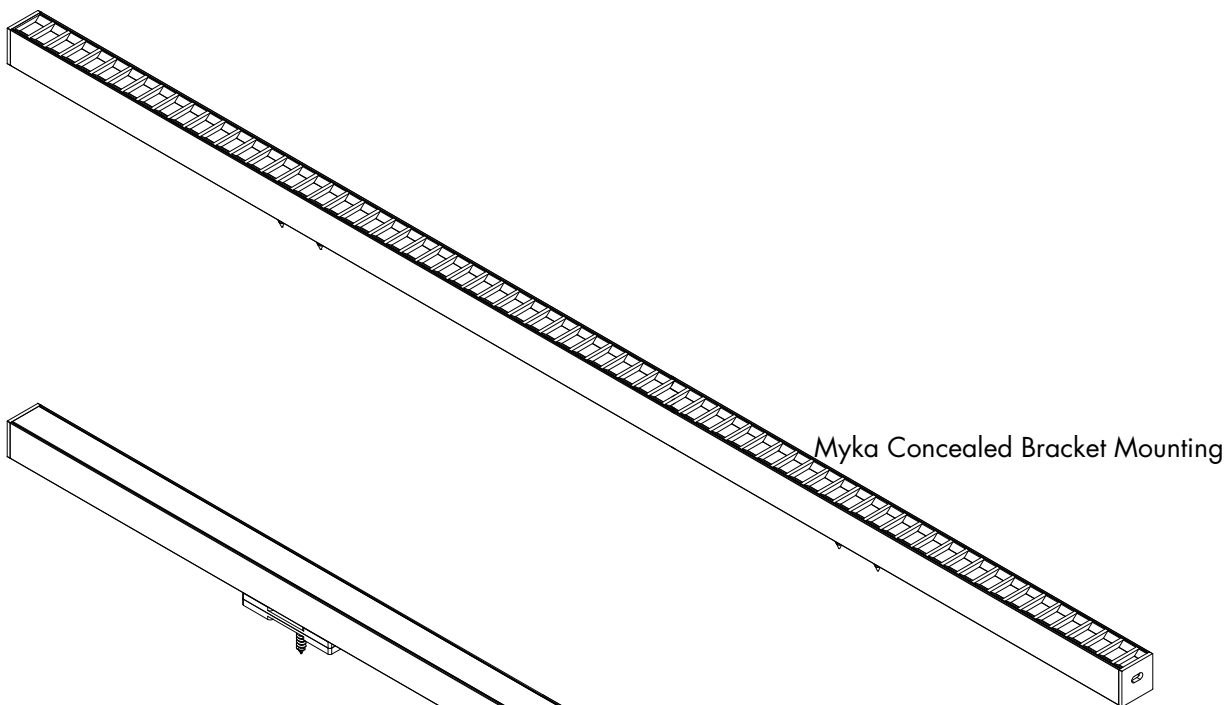

Myka Concealed Bracket Mounting

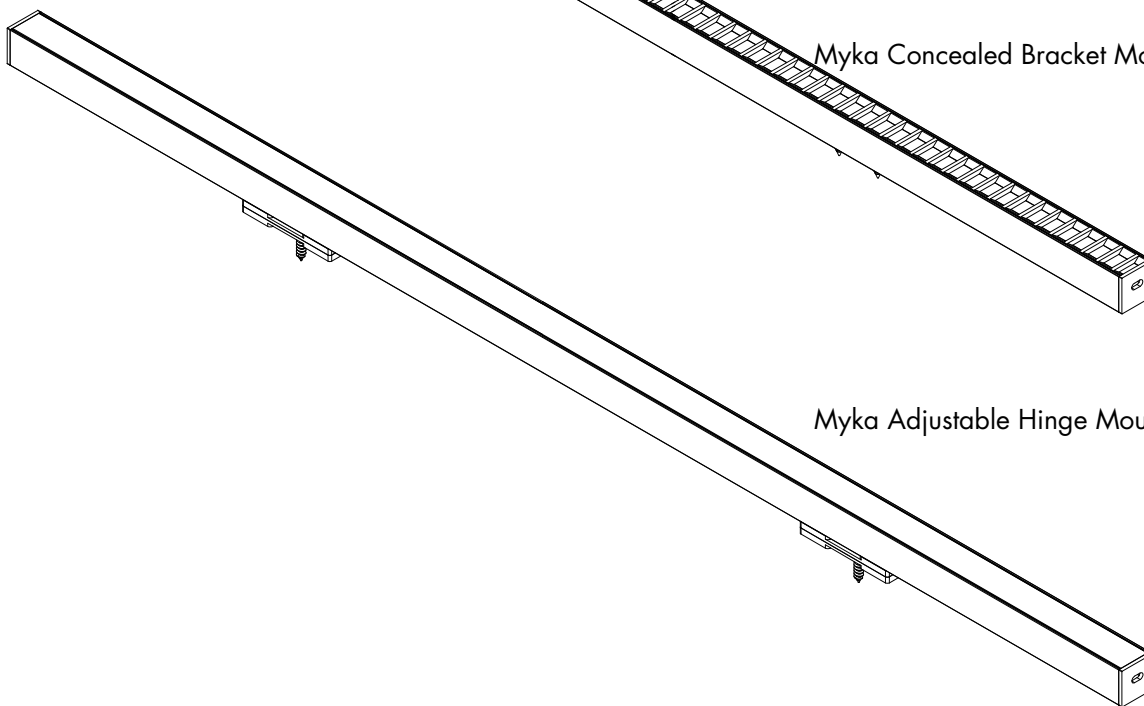

Myka Adjustable Hinge Mounting

Myka Wet - Installation Instructions

Models MKW-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

REVO.3
09142024

2 / 4

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SURFACE MOUNT ONLY
5. SUITABLE FOR WET LOCATIONS, MUST USE APPROPRIATE WEATHERPROOF RATED WIRE CONNECTORS.
6. INHERENTLY PROTECTED
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

Concealed Bracket Installation

1

fixture

4" every 24" 4"

fixed mounting clip

surface

1.1 Determine the location of where the fixture(s) will be installed. Lay the fixture(s) on the surface, and make any necessary reference marks for the fixed mounting clips (or if using the fixed 45° degree mounting clip). Make marks 4" from each end of the fixture(s) and also every 24" in between.

1.2 Lay the fixed clip onto the reference mark points and secure using the provided hardware.

2

2.1 If necessary make any pass through holes for wire lead/connector to the surface, depending on the power feed option. Then snap the fixture into the concealed mounting bracket to secure in place.

3

Follow one of the two options to connect the fixture to the power supply

Option 1- Secure female quick connect to male quick connect. Feed male quick connect wire through conduit to power supply

female quick connect

to power supply

male quick connect

OR

Option 2- Feed wire whip to the power supply

wires from fixture

4

Connect +24 VDC red wire from the fixture to the power supply +24 VDC red wire with a wire nut.
Connect -24VDC black wire from the fixture to power supply -24VDC black wire with a wire nut.

class II power supply

120 VAC

24 VDC

to fixture

+24 VDC RED

-24 VDC BLACK

+24 VDC RED

-24 VDC BLACK

Myka Wet - Installation Instructions

Models MKW-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SURFACE MOUNT ONLY
5. SUITABLE FOR WET LOCATIONS, MUST USE APPROPRIATE WEATHERPROOF RATED WIRE CONNECTORS.
6. INHERENTLY PROTECTED
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.



REVO.3
09142024

3 / 4



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Adjustable Hinge Installation

1

1.1 Slightly loosen both screws on the sides of the hinge bracket. Rotate the fixture to expose mounting hole.

2

Note: : Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instruction for additional information.
Note: More than one person is recommended for this installation.

2.1 Determine the location of the fixture. Then secure the fixture to the surface using the provided mounting screws.
2.2 Rotate the fixture to the desired angle then tighten the side screws to secure.

3

Follow one of the two options to connect the fixture to the power supply

Option 1- Secure female quick connect to male quick connect. Feed male quick connect wire through conduit to power supply

OR

Option 2- Feed wire whip to the power supply

female quick connect

male quick connect

to power supply

wires from fixture

4

class II power supply

120 VAC

24 VDC

to fixture

Connect +24 VDC red wire from the fixture to the power supply +24 VDC red wire with a wire nut.
Connect -24VDC black wire from the fixture to power supply -24VDC black wire with a wire nut.

+24 VDC RED

-24 VDC BLACK

+24 VDC RED

-24 VDC BLACK

Myka Wet - Installation Instructions

Models MKW-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SURFACE MOUNT ONLY
5. SUITABLE FOR WET LOCATIONS, MUST USE APPROPRIATE WEATHERPROOF RATED WIRE CONNECTORS.
6. INHERENTLY PROTECTED
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.


REVO.3
09142024

4 / 4

power supplies at the end of the run

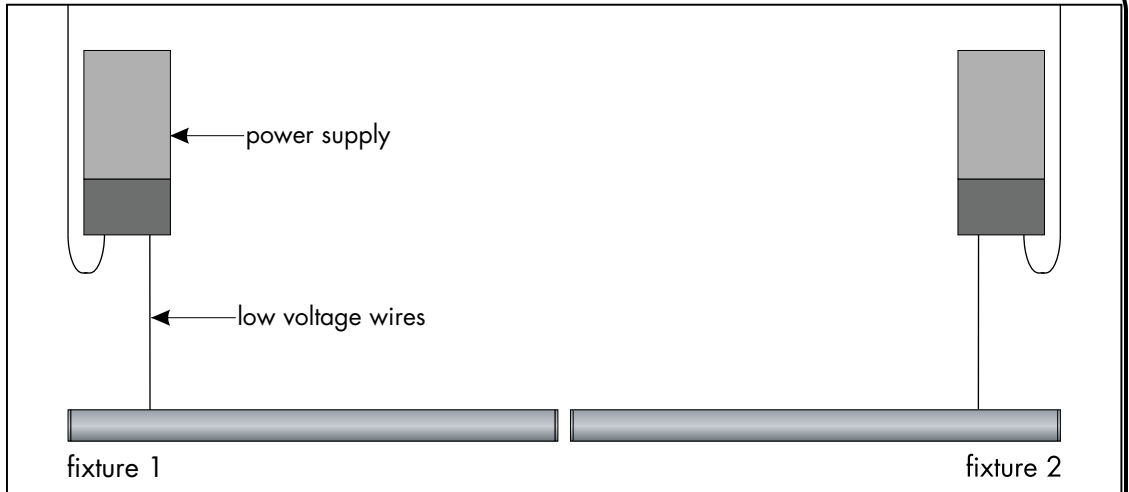

power supplies in the middle of the run

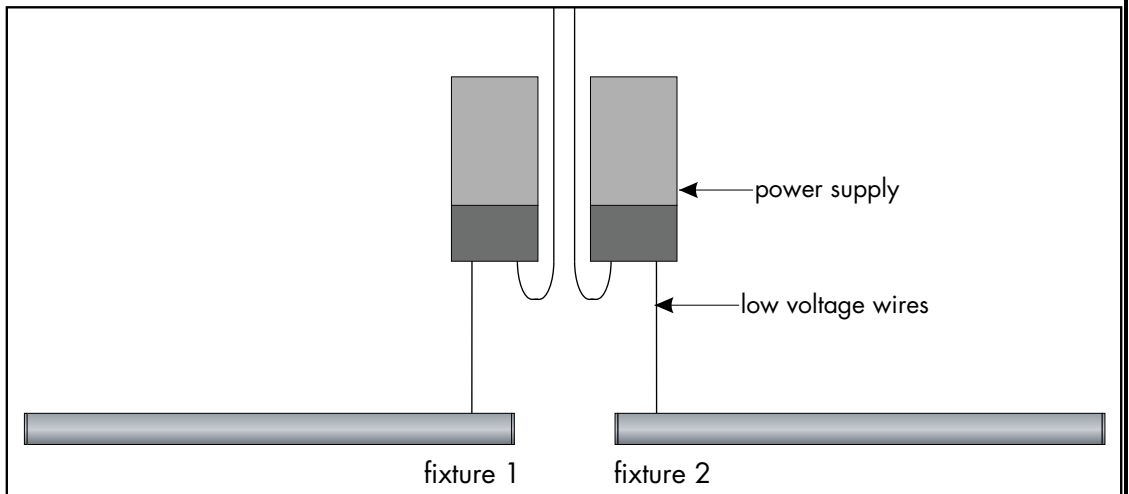

consecutive layout, NOT RECOMMENDED

