



Features

- IP20 rating for dry location only
- Constant voltage output
- Input Voltage: 120-277VAC
- Isolated dimming circuit, dimmable with 0-10V dimmer
- Dim-to-off, with minimum dimming percentage: 5%
- Flicker-free dimming
- Cooling by free air convection
- Full protection metal case
- Auto reset breakers, from short circuit, overloading, & over temperature
- 5 year Warranty




Technical Information


MODEL		PS-010V-D-96-24
ELECTRICAL	Voltage/Frequency	120-277V AC @ 50/60Hz
	Inrush Current	80A @ 277V
	Power Factor	> 0.94 @ 120~277V*
	Efficiency	0.83 @ 120V* 0.86 @ 277V*
	Max Input Current	1.05A @ 120V 0.45A @ 277V
	Max Output Power	96W
	Max Output Current	4.0A
	Output Voltage	24V DC
	Total Harmonic Distortion	< 20%*
	Start Up Time	< 0.5S*
	Minimum Load	10%
	Dimming (0-10V)	5% - 100% LOG
	0-10V Current Draw	0.25mA
RATING	Environment	Dry IP20 NEMA 1
	Compliance	UL 8750
	Ambient Operating Temperature Range	-40 to 60°C
DIMENSIONS	Length A	8.29"
	Width B	4.10"
	Height C	1.59"
Net. Weight		2.2 lbs

*At max load


General Wiring Diagram

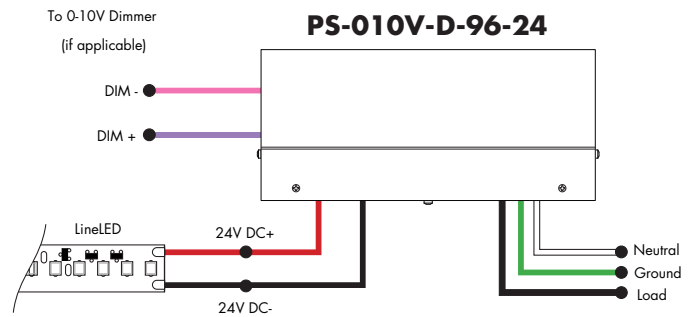

Product Dimensions

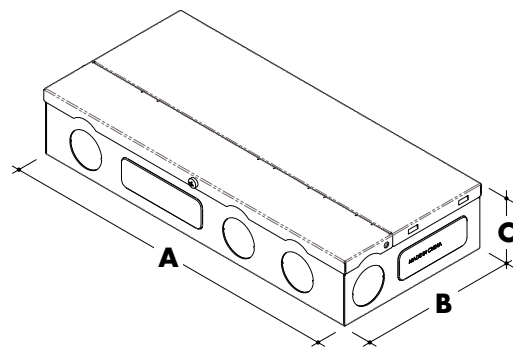

Ordering Code



0-10V - 5% dimming

Compatibility:
View a complete list of compatible dimmers on product page ([link](#))