Models: Plexineon Fixture Catenary Mount Static Color and Plexineon Rings Catenary Mount Static Color

Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- 2. USE ONLY WITH CLASS 2 POWER UNIT
- 3. 24 VOLTS DC
- 4. SUITABLE FOR WET LOCATIONS




5. CATENARY MOUNT ONLY


REV0.2 12092024

1/5





Plexineon Straight Run Fixture Catenary Mount

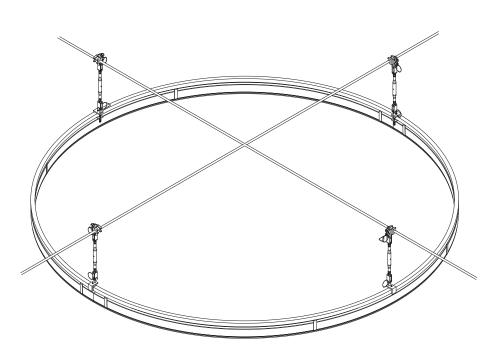

Plexineon Ring Catenary Mount

Models: Plexineon Fixture Catenary Mount Static Color and Plexineon Rings Catenary Mount Static Color

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.

2. USE ONLY WITH CLASS 2 POWER UNIT

3. 24 VOLTS DC


4. SUITABLE FOR WET LOCATIONS



by lumini 7777 Merrimac Ave Niles, II 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com


2/5

REVO.2 12092024

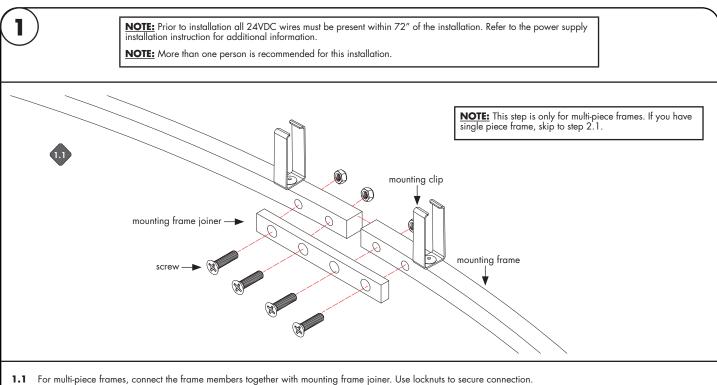

5. CATENARY MOUNT ONLY

111 To more piece frames, connect the frame members logaritat with moonling frame pines. Ose location to secure connection.

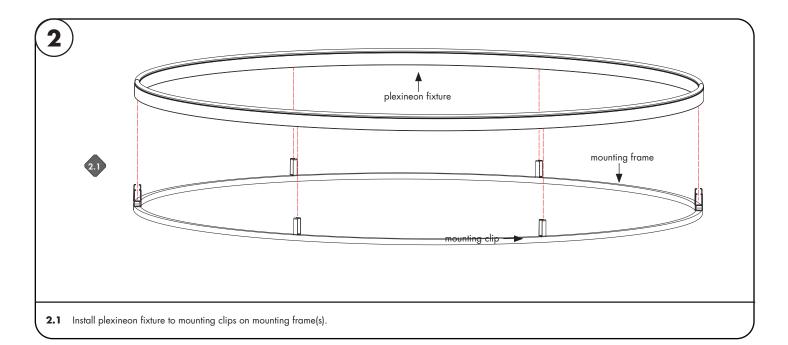

Models: Plexineon Fixture Catenary Mount Static Color and Plexineon Rings Catenary Mount Static Color

Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- 2. USE ONLY WITH CLASS 2 POWER UNIT
- **3.** 24 VOLTS DC
- 4. SUITABLE FOR WET LOCATIONS


5. CATENARY MOUNT ONLY




REVO.2 12092024

3/5

7777 Merrimac Ave Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com

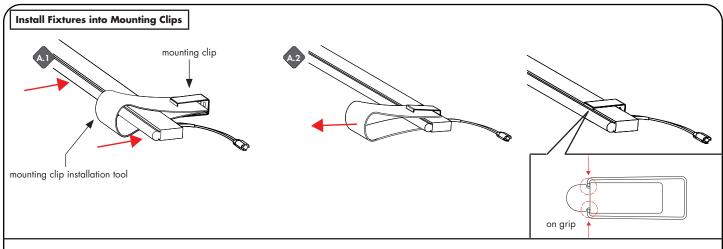

- A.1 Make an U shape with mounting clip installation tool, insert two edges into mounting clip. Place plexineon fixture insde the shape. Then push the fixture into clip.
- **A.2** Remove the tool. Make sure mounting clip is clipped right on the grip.

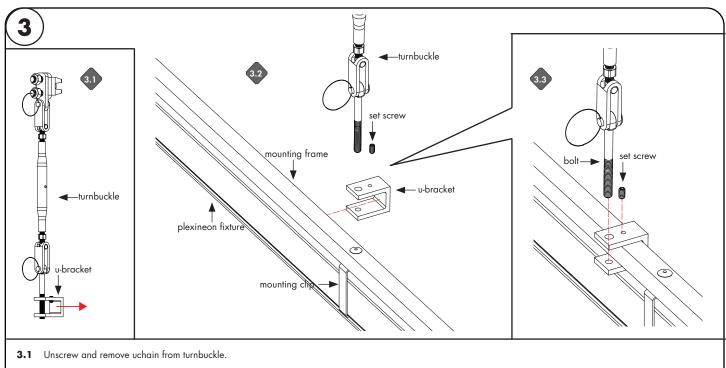

- 3.2 Cauculate points for turnbuckles on mounting frame. Set uchain to measured place.
- **3.3** Screw bolt back into uchain to lock the turnbuckle with mounting frame, securing the position by set screw.

Models: Plexineon Fixture Catenary Mount Static Color and Plexineon Rings Catenary Mount Static Color

5. CATENARY MOUNT ONLY

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.

2. USE ONLY WITH CLASS 2 POWER UNIT

3. 24 VOLTS DC


4. SUITABLE FOR WET LOCATIONS



7777 Merrimac Ave Niles, IL 60714 REVO.2 T 224.333.6033 12092024


4/5



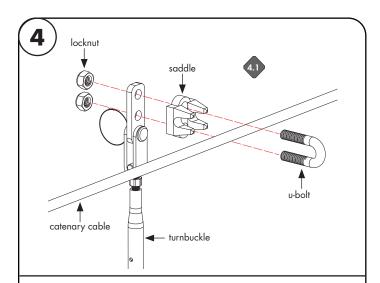

NOTE: Catenary cables are provided by others. Max Ø1/4".

Loosen locknuts to remove the U-bolt. Place the catenary cable between the saddle and u-bolt. Use locknuts to clamp the catenary cable between the saddle and u-bolt. Do this for all rope clips.

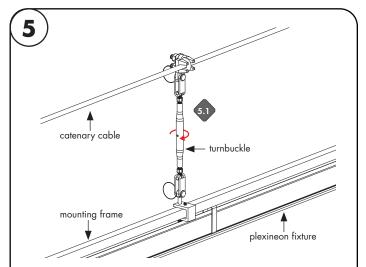

After installing plexineon with catenary cable, adjust the length by rotating the middle part of turnbuckle.

NOTE: Turnbuckle is adjustable up to 2.5" vertically.

Models: Plexineon Fixture Catenary Mount Static Color and Plexineon Rings Catenary Mount Static Color

Please read all instructions prior to installation and keep for future reference!


- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- 2. USE ONLY WITH CLASS 2 POWER UNIT
- **3.** 24 VOLTS DC
- 4. SUITABLE FOR WET LOCATIONS




REVO.2 12092024

5/5



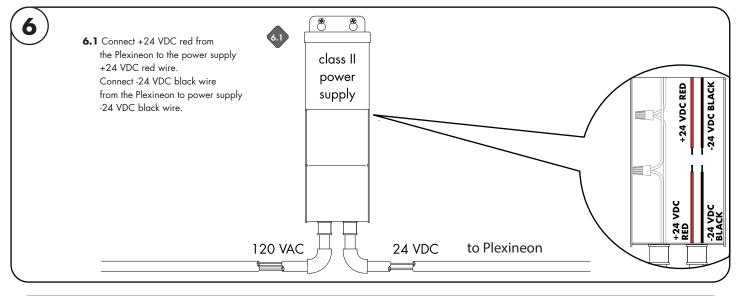

5. CATENARY MOUNT ONLY

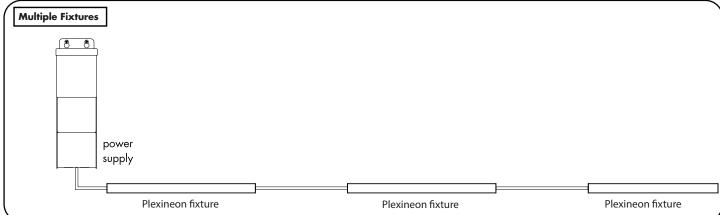

Power Supply Wiring Diagram

Note: Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.

