
Extruded aluminum profile



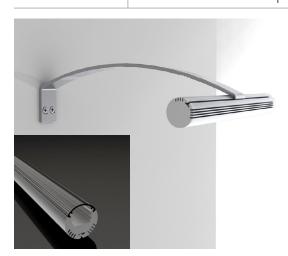

Features

The RO Channel is a linear aluminum extrusion that has been designed to fit many LED lighting needs. Multiple mounting bracket options allow for great flexibility in any application; from directional lighting solutions to secure fixed installations like a closet rod light fixture. Substantial aluminum mass in profile provides excellent heat sink for high power LEDs. RO linear aluminum extrusion comes with three choices of optical lenses. Extrusion and lenses are field cuttable. All other accessories sold separately (page 2).

Silver anodized

Mounting

Screw Fasteners

Diffuser Lens

Polycarbonate, snap-in-place, UV resistant

Warranty

7 Years

Declare.

MADE IN

Product Dimensions








	Lens Options
	-39"
Actual Length	-78″
	-118"
Available Lenses	- Clear
	- Frosted

TRANSMISSION PERCENTAGE (COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Clear Lens	79%
Frosted Lens	54%

See LED tape spec sheet for lens dotting characteristics & compatibility

Ordering Code

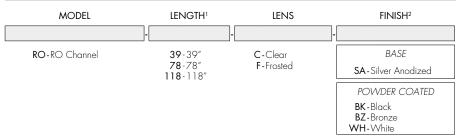


^{1 -} For Channels and Lenses over 96", incremental shipping charges will apply.
2 - Powder Coat finishes may have extended lead times and price adder. Custom RALs are available, please consult Inside Sales with specific request.



All accessories sold separately.

Mounting Brackets

MC-R1 Gray Finish



MC-R3-XX Mounting Clip



XX	Color
SA	Silver Anodized
WH	White
BK	Black
BZ	Bronze

MC-RO-AA Metal Finish

0.79"

MC-RO-WA Metal Finish



MC-RO-MF-XX

Mounting Cover



XX	Color
SA	Silver Anodized
WH	White
BK	Black
BZ	Bronze

Endcaps

EC-R3-XX

Endcap

EC-R4-XX

Endcap with hole for powerfeed





XX	Color
SA	Silver Anodized
WH	White
BK	Black
BZ	Bronze

