MODEL RCR

Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- 2. MUST BE INSTALLED PER NFPA 70, ARTICLE 410.16
- 3. ENSURE POWER IS OFF PRIOR TO INSTALLATION TO PREVENT ELECTRICAL 7. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE SHOCK
- 4. MORE THAN ONE PERSON IS RECOMMENDED FOR THIS INSTALLTION
- 5. DAMP LOCATIONS ONLY
- 6. USE ONLY WITH CLASS 2 POWER UNIT
- 8. MAX 50 POUNDS PER 1 FOOT WITH MOUNTING SUPPORTS
- 9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE




7777 Merrimac Ave Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com

www.luminii.com

REVO.7 01062025

1/4

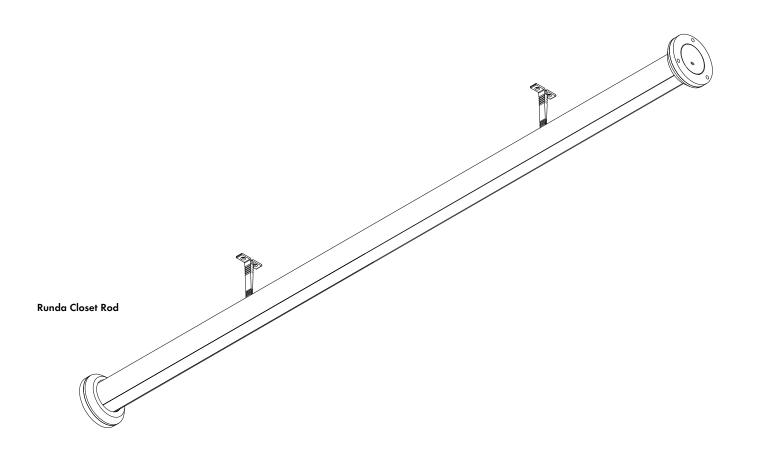



IMPORTANT SAFETY INSTRUCTIONS!

WHEN INSTALLING OR USING THIS TRACK SYSTEM, BASIC SAFETY PRECAUTIONS SHOULD ALWAYS BE FOLLOWED, INCLUDING:

A. READ ALL INSTRUCTIONS

- **B.** DO NOT INSTALL ANY PART OF THE TRACK SYSTEM LESS THAN 5 FEET ABOVE THE FLOOR
- C.DO NOT INSTAL ANY LUMINAIRE ASSEMBLY CLOSER THAN 6 INCHES FROM ANY CURTAIN OR SIMILARCOMBUSTIBLE MATERIAL
- D.DISCONNECT ELECTRICAL POWER BEFORE ADDING TO OR CHANGING THE CONFIGURATION OF THE TRACK
- E. DO NOT ATTEMPT TO ENERGIZE ANYTHING OTHER THAN LIGHTING TRACK LUMINARES ON THE TRACK. TO REDUCE THE RISL OF FIRE AND ELECTRIC SHOCK, DO NOT ATTEMPT TO CONNECT POWER TOOLS, EXTENSION CORDS, APPLIANCE, OR THE LIKE TO THE TRACK.

MODEL RCR

bracket

Please read all instructions prior to installation and keep for future reference!


- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- 2. MUST BE INSTALLED PER NFPA 70, ARTICLE 410.16
- 3. ENSURE POWER IS OFF PRIOR TO INSTALLATION TO PREVENT ELECTRICAL 7. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE SHOCK
- 4. MORE THAN ONE PERSON IS RECOMMENDED FOR THIS INSTALLTION
- 5. DAMP LOCATIONS ONLY
- 6. USE ONLY WITH CLASS 2 POWER UNIT
- 8. MAX 50 POUNDS PER 1 FOOT WITH MOUNTING SUPPORTS
- 9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE




2/4


01062025





- 1.1 Measure the closet space to determine the length of the Runda closet rod you need
- 1.2 Runda Closet Rod comes with an extra $\frac{1}{2}$ " of extrusion both side of the LED that is field cuttable.
- Make sure power to the LED is off or disconnected from the power supply.
- Remove the inner end caps the side of the extrusion you plan to cut. Remove both if you plan to cut both sides.
- 1.23 Insert Wires into Extrusion to avoid damage during cutting.
- Cut down the extrusion to the exact closet space you measured in step 1.1. Please be sure to NOT cut the LED.
- Remove Wires once extrusion is cut and clean area around LED of debris. 1.25
- 1.3 Put the inner end caps back on the extrusion.

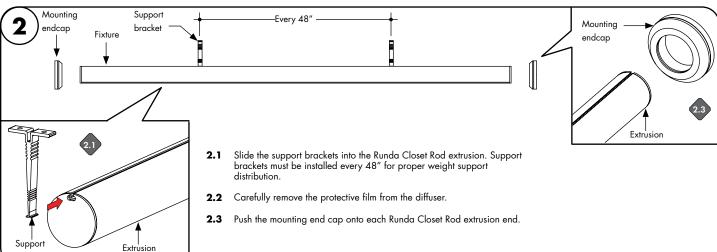

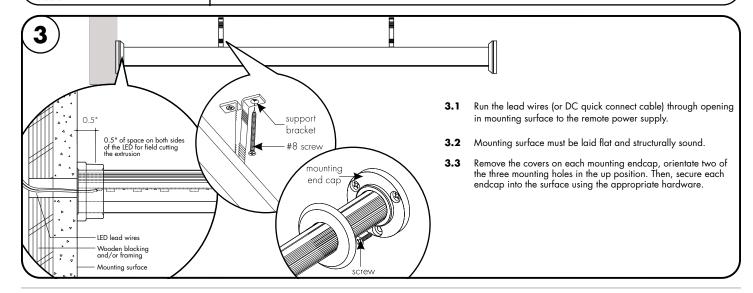

MODEL RCR


Please read all instructions prior to installation and keep for future reference!


- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- 2. MUST BE INSTALLED PER NFPA 70, ARTICLE 410.16
- 3. ENSURE POWER IS OFF PRIOR TO INSTALLATION TO PREVENT ELECTRICAL 7. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE SHOCK
- 4. MORE THAN ONE PERSON IS RECOMMENDED FOR THIS INSTALLTION
- 5. DAMP LOCATIONS ONLY
- 6. USE ONLY WITH CLASS 2 POWER UNIT
- 8. MAX 50 POUNDS PER 1 FOOT WITH MOUNTING SUPPORTS
- 9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE

REVO.7 01062025

3 / 4



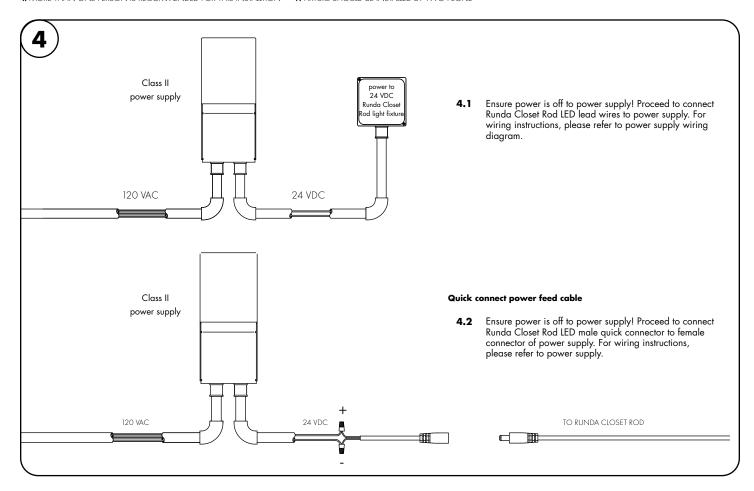

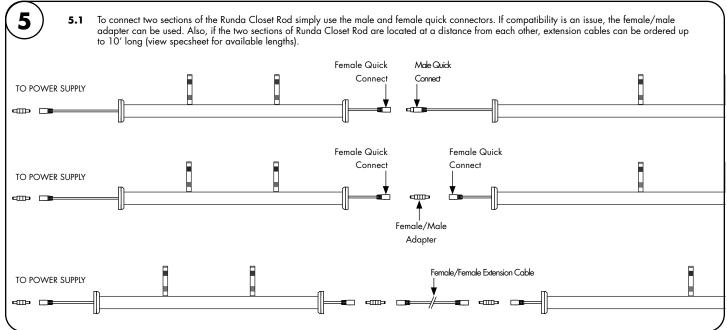

MODEL RCR

Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- 2. MUST BE INSTALLED PER NFPA 70, ARTICLE 410.16
- 3. ENSURE POWER IS OFF PRIOR TO INSTALLATION TO PREVENT ELECTRICAL 7. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE SHOCK
- 4. MORE THAN ONE PERSON IS RECOMMENDED FOR THIS INSTALLTION 9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE
- 5. DAMP LOCATIONS ONLY
- 6. USE ONLY WITH CLASS 2 POWER UNIT
- 8. MAX 50 POUNDS PER 1 FOOT WITH MOUNTING SUPPORTS



7777 Merrimac Ave Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com

01062025 4 / 4

REVO.7

Power Supply Wiring Diagram

Note: Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.



Static White Wiring Diagram PDF