


SOLO 16 STUCCHI

6° ULTRA NARROW BEAM

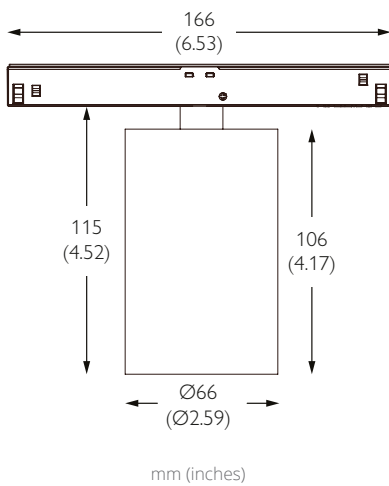

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The ultra narrow beam in our 8.40W 700lm module has a peak intensity of 28223cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 8.40W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI 0-10V 1-10V Casambi
WEIGHT 395g 570g* 0.87lb 1.25lb*	

MOUNTING




MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES


FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm	BEAM ANGLE 6°
DELIVERED LUMENS 650lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 55mm (2.16")	LIFETIME L90B10 100,000hrs
TM65 17.37kgCO2e	STANDARDS
TM66 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

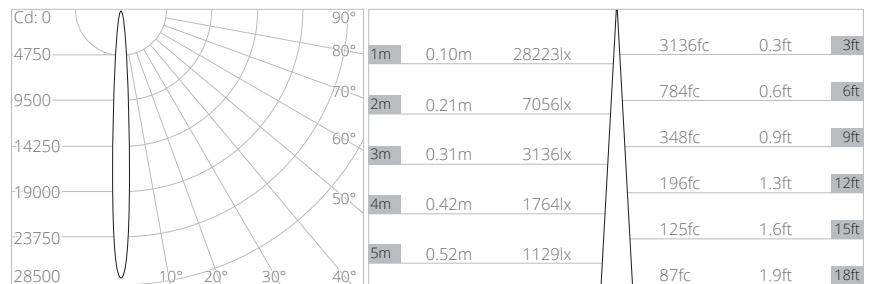


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052	<ul style="list-style-type: none"> T White 9016 B Black 9005 	<ul style="list-style-type: none"> T White 9016 B Black 9005 A Brushed Aluminium R Rubbed Bronze* P Polished Brass* S Brushed Brass* 	<ul style="list-style-type: none"> 2792 2700K 92CRI 3092 3000K 92CRI 4092 4000K 92CRI 	<ul style="list-style-type: none"> 06 Ultra Narrow 10 Narrow 15 Medium 30 Flood 55 Wide Flood 	<ul style="list-style-type: none"> A 0-10V B 1-10V C Casambi D DALI

Example Code: 1052 - TT - 309210 - D

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

SOLO 16 STUCCHI

10° NARROW BEAM

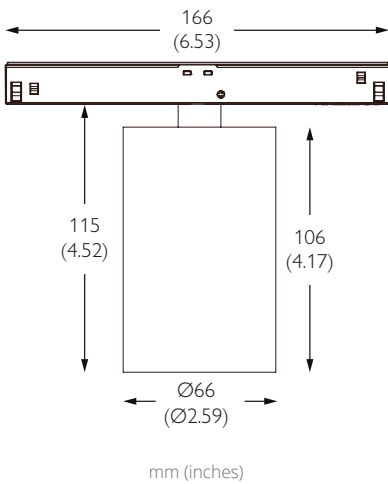

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The narrow beam in our 8.40W 700lm module has a peak intensity of 15476cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 8.40W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI 0-10V 1-10V Casambi
WEIGHT 395g 570g* 0.87lb 1.25lb*	





MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended


FINISHES

FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*
*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm	BEAM ANGLE 10°
DELIVERED LUMENS 653lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 55mm (2.16")	LIFETIME L90B10 100,000hrs
TM65 17.37kgCO2e	STANDARDS
TM66 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

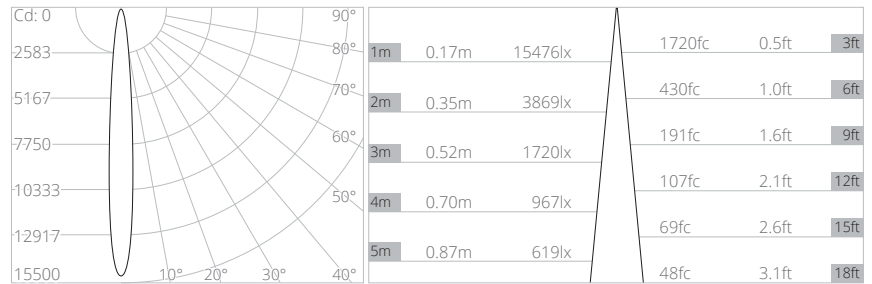


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052	<ul style="list-style-type: none"> T White 9016 B Black 9005 	<ul style="list-style-type: none"> T White 9016 B Black 9005 A Brushed Aluminium R Rubbed Bronze* P Polished Brass* S Brushed Brass* 	<ul style="list-style-type: none"> 2792 2700K 92CRI 3092 3000K 92CRI 4092 4000K 92CRI 	<ul style="list-style-type: none"> 06 Ultra Narrow 10 Narrow 15 Medium 30 Flood 55 Wide Flood 	<ul style="list-style-type: none"> A 0-10V B 1-10V C Casambi D DALI

Example Code: 1052 - TT - 309210 - D

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

SOLO 16 STUCCHI

16° MEDIUM BEAM

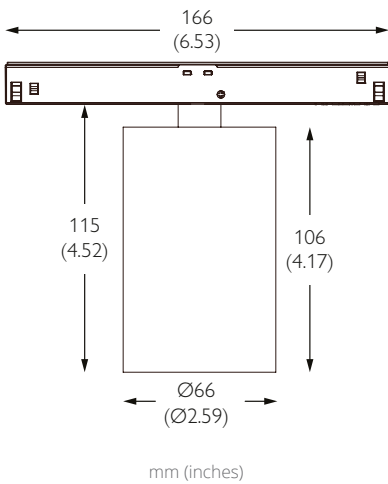

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The medium beam in our 8.40W 700lm module has a peak intensity of 5671cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 8.40W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI 0-10V 1-10V Casambi
WEIGHT 395g 570g* 0.87lb 1.25lb*	

MOUNTING





MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES


FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm	BEAM ANGLE 16°
DELIVERED LUMENS 623lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 55mm (2.16")	LIFETIME L90B10 100,000hrs
TM65 17.37kgCO2e	STANDARDS
TM66 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

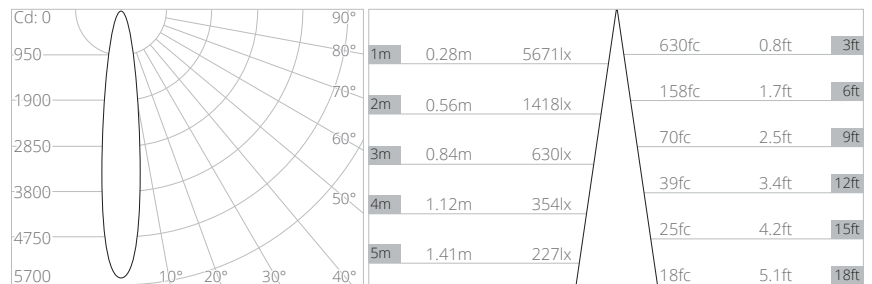


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052	<ul style="list-style-type: none"> T White 9016 B Black 9005 	<ul style="list-style-type: none"> T White 9016 B Black 9005 A Brushed Aluminium R Rubbed Bronze* P Polished Brass* S Brushed Brass* 	<ul style="list-style-type: none"> 2792 2700K 92CRI 3092 3000K 92CRI 4092 4000K 92CRI 	<ul style="list-style-type: none"> 06 Ultra Narrow 10 Narrow 15 Medium 30 Flood 55 Wide Flood 	<ul style="list-style-type: none"> A 0-10V B 1-10V C Casambi D DALI

Example Code: 1052 - TT - 309210 - D

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

SOLO 16 STUCCHI

30° FLOOD BEAM

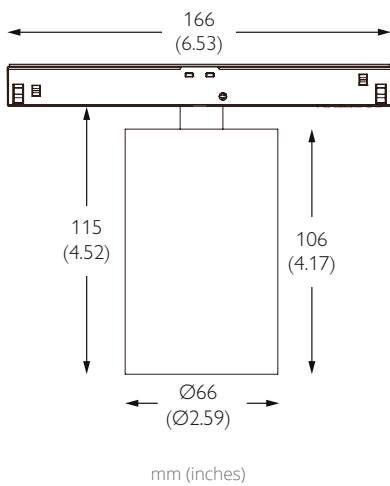

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The flood beam in our 8.40W 700lm module has a peak intensity of 1652cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 8.40W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI 0-10V 1-10V Casambi
WEIGHT 395g 570g* 0.87lb 1.25lb*	

MOUNTING





MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES


FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm	BEAM ANGLE 30°
DELIVERED LUMENS 637lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 55mm (2.16")	LIFETIME L90B10 100,000hrs
TM65 17.37kgCO2e	STANDARDS
TM66 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

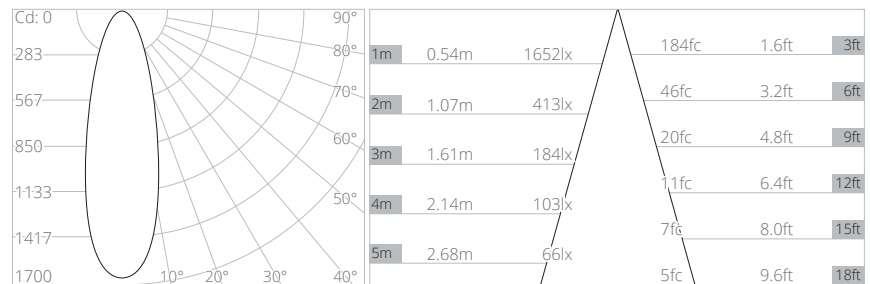


MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052	<ul style="list-style-type: none"> T White 9016 B Black 9005 	<ul style="list-style-type: none"> T White 9016 B Black 9005 A Brushed Aluminium R Rubbed Bronze* P Polished Brass* S Brushed Brass* 	<ul style="list-style-type: none"> 2792 2700K 92CRI 3092 3000K 92CRI 4092 4000K 92CRI 	<ul style="list-style-type: none"> 06 Ultra Narrow 10 Narrow 15 Medium 30 Flood 55 Wide Flood 	<ul style="list-style-type: none"> A 0-10V B 1-10V C Casambi D DALI

Example Code: 1052 - TT - 309210 - D

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ

SOLO 16 STUCCHI

50° WIDE FLOOD BEAM

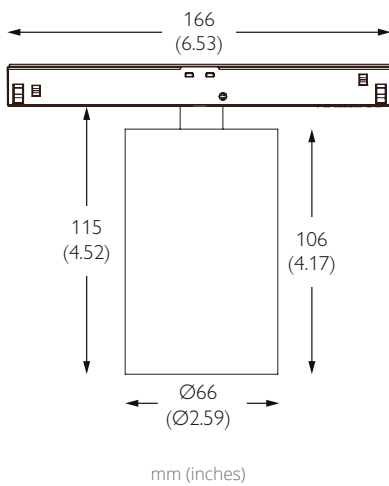

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The wide flood beam in our 8.40W 700lm module has a peak intensity of 633cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 8.40W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI 0-10V 1-10V Casambi
WEIGHT 395g 570g* 0.87lb 1.25lb*	

MOUNTING





MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES


FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm	BEAM ANGLE 50°
DELIVERED LUMENS 605lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 55mm (2.16")	LIFETIME L90B10 100,000hrs
TM65 17.37kgCO ₂ e	STANDARDS
TM66 2.4	   

Photometry shown is for 3000K module. Please enquire for other CCT photometry.

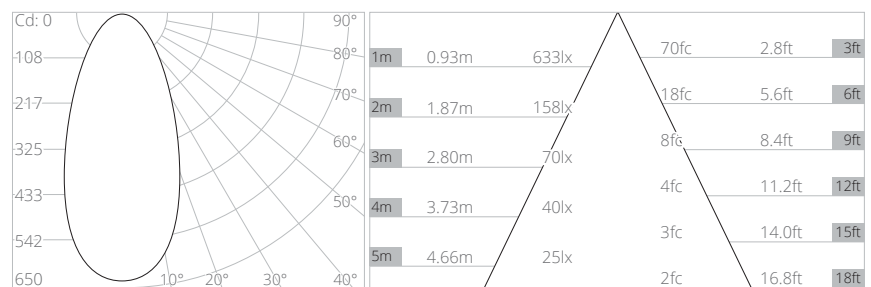

MODEL	TRACK & ADAPTER FINISH	LUMINAIRE FINISH	LED CCT	BEAM ANGLE	DIMMING CONTROL
1052	<ul style="list-style-type: none"> T White 9016 B Black 9005 	<ul style="list-style-type: none"> T White 9016 B Black 9005 A Brushed Aluminium R Rubbed Bronze* P Polished Brass* S Brushed Brass* 	<ul style="list-style-type: none"> 2792 2700K 92CRI 3092 3000K 92CRI 4092 4000K 92CRI 	<ul style="list-style-type: none"> 06 Ultra Narrow 10 Narrow 15 Medium 30 Flood 55 Wide Flood 	<ul style="list-style-type: none"> A 0-10V B 1-10V C Casambi D DALI

Example Code: 1052 - TT - 309210 - D

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ