

SOLO 8 PLUS SURFACE

17° NARROW BEAM

STATIC WHITE



OVERVIEW

Solo 8 Plus Surface is a Constant Current single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has four site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The narrow beam in our 6.00W 515lm module has a peak intensity of 3738cd. This product requires an external 350mA 17.15V Constant Current LED driver.


UK PART L Part L1A / L1B (Dwellings) ●
Part L2A (General)
Part L2A (Display) ●



PERFORMANCE


FWHM	17°	Category	IP20
Luminous Flux	405 lm	Material	Machined AL 6063-T6 Machined Brass
Peak Intensity	3738 cd	Finishes	Brushed Aluminium White RAL9010 Black RAL9005 Rubbed Bronze* Polished Brass* Brushed Brass *
CCT	2400K 2700K 3000K 3500K 4000K	Weight	82g 0.18lb
CRI Min.	92: 2400K 98: 2700K/3000K/3500K 95: 4000K	Mounting	Surface mounting plate
Drive Current	350 mA	Movement	Pan 360° Tilt 90°
Nom. Voltage	17.15 V	Lockable	Pan
Max. Wattage	6.00 W	Accessories	N/A Louver Lenses 25mm (1")
Dimming	0-10V DALI	TM65 TM66	8.18kgCO2e 2.4
Driver Type	Constant Current Remote	Lifetime	L90B10 50,000hrs 5 year warranty
Class	SELV Class III		

DIMENSIONS

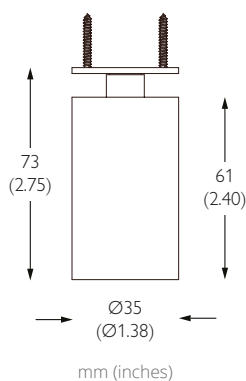

PHOTOMETRY

CCT	Multiplier
2400K	x0.97
2700K	x0.93
3000K	x1.00
3500K	x1.05
4000K	x1.05

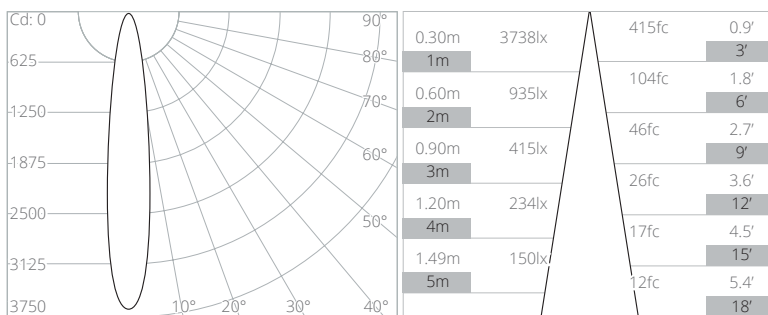

Data at 3000K

ORDER CODE

Model	Finish	CCT	Beam Angle
1111C	-	-	-
	WH White RAL 9010	2490 2400K 90CRI	NA Narrow 17°
	BK Black RAL 9005	2798 2700K 98CRI	ME Medium 24°
	AL Brushed Aluminium	3098 3000K 98CRI	WD Wide 35°
	RB Rubbed Bronze	3598 3500K 98CRI	VW Very Wide 50°
	PB Polished Brass	4095 4000K 95CRI	
	SB Brushed Brass		

Example Code: 1111C-WH-2798NA

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ
See Drivers, Power Supplies and Accessories sections for further order codes

SOLO 8 PLUS SURFACE

24° MEDIUM BEAM

STATIC WHITE



OVERVIEW

Solo 8 Plus Surface is a Constant Current single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has four site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The medium beam in our 6.00W 515lm module has a peak intensity of 2468cd. This product requires an external 350mA 17.15V Constant Current LED driver.


- UK PART L**
- Part L1A / L1B (Dwellings) ●
 - Part L2A (General)
 - Part L2A (Display) ●



PERFORMANCE


FWHM	24°	Category	IP20
Luminous Flux	440 lm	Material	Machined AL 6063-T6 Machined Brass
Peak Intensity	2468 cd	Finishes	Brushed Aluminium White RAL9010 Black RAL9005 Rubbed Bronze* Polished Brass* Brushed Brass *
CCT	2400K 2700K 3000K 3500K 4000K	Weight	82g 0.18lb
CRI Min.	92: 2400K 98: 2700K/3000K/3500K 95: 4000K	Mounting	Surface mounting plate
Drive Current	350 mA	Movement	Pan 360° Tilt 90°
Nom. Voltage	17.15 V	Lockable	Pan
Max. Wattage	6.00 W	Accessories	N/A Louver Lenses 25mm (1")
Dimming	0-10V DALI	TM65 TM66	8.18kgCO2e 2.4
Driver Type	Constant Current Remote	Lifetime	L90B10 50,000hrs 5 year warranty
Class	SELV Class III		

DIMENSIONS

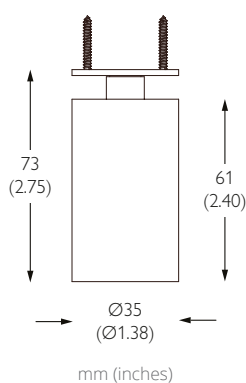

PHOTOMETRY

CCT	Multiplier
2400K	x0.97
2700K	x0.93
3000K	x1.00
3500K	x1.05
4000K	x1.05

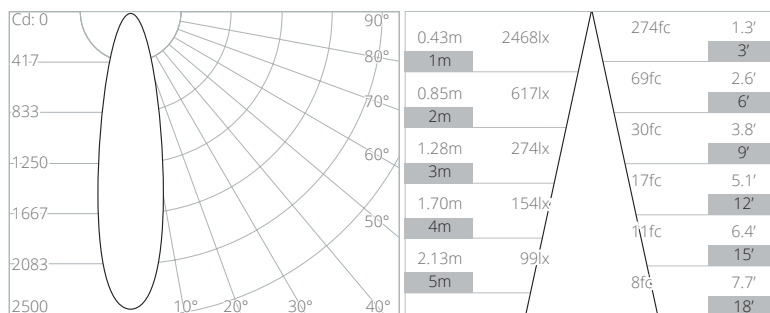

Data at 3000K

ORDER CODE

Model	Finish	CCT	Beam Angle
1111C	-	-	-
	WH White RAL 9010	2490 2400K 90CRI	NA Narrow 17°
	BK Black RAL 9005	2798 2700K 98CRI	ME Medium 24°
	AL Brushed Aluminium	3098 3000K 98CRI	WD Wide 35°
	RB Rubbed Bronze	3598 3500K 98CRI	VW Very Wide 50°
	PB Polished Brass	4095 4000K 95CRI	
	SB Brushed Brass		

Example Code: **1111C-WH-2798ME**

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ
See Drivers, Power Supplies and Accessories sections for further order codes

SOLO 8 PLUS SURFACE

35° WIDE BEAM

STATIC WHITE



OVERVIEW

Solo 8 Plus Surface is a Constant Current single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has four site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The wide beam in our 6.00W 515lm module has a peak intensity of 1253cd. This product requires an external 350mA 17.15V Constant Current LED driver.


- UK PART L**
- Part L1A / L1B (Dwellings) ●
 - Part L2A (General)
 - Part L2A (Display) ●



PERFORMANCE


FWHM	35°	Category	IP20
Luminous Flux	461 lm	Material	Machined AL 6063-T6 Machined Brass
Peak Intensity	1253 cd	Finishes	Brushed Aluminium White RAL9010 Black RAL9005 Rubbed Bronze* Polished Brass* Brushed Brass *
CCT	2400K 2700K 3000K 3500K 4000K	Weight	82g 0.18lb
CRI Min.	92: 2400K 98: 2700K/3000K/3500K 95: 4000K	Mounting	Surface mounting plate
Drive Current	350 mA	Movement	Pan 360° Tilt 90°
Nom. Voltage	17.15 V	Lockable	Pan
Max. Wattage	6.00 W	Accessories	N/A Louver Lenses 25mm (1")
Dimming	0-10V DALI	TM65 TM66	8.18kgCO2e 2.4
Driver Type	Constant Current Remote	Lifetime	L90B10 50,000hrs 5 year warranty
Class	SELV Class III		

DIMENSIONS

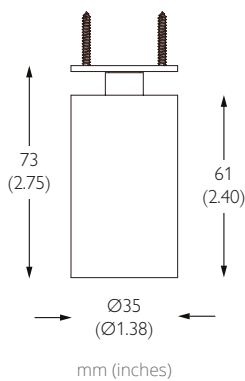

PHOTOMETRY

CCT	Multiplier
2400K	x0.97
2700K	x0.93
3000K	x1.00
3500K	x1.05
4000K	x1.05

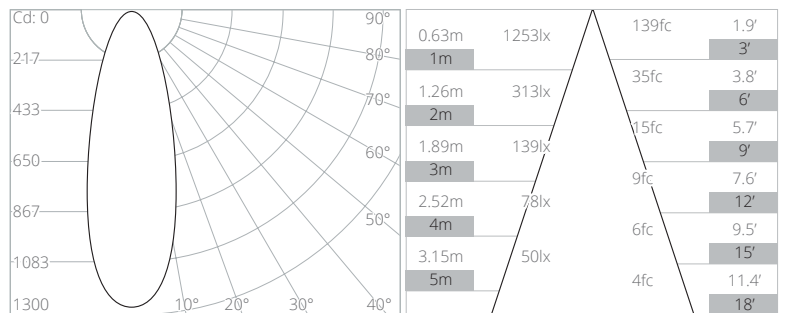

Data at 3000K

ORDER CODE

Model	Finish	CCT	Beam Angle
1111C	-	-	-
	WH White RAL 9010	2490 2400K 90CRI	NA Narrow 17°
	BK Black RAL 9005	2798 2700K 98CRI	ME Medium 24°
	AL Brushed Aluminium	3098 3000K 98CRI	WD Wide 35°
	RB Rubbed Bronze	3598 3500K 98CRI	VW Very Wide 50°
	PB Polished Brass	4095 4000K 95CRI	
	SB Brushed Brass		

Example Code: 1111C-WH-2798WD

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ
See Drivers, Power Supplies and Accessories sections for further order codes

SOLO 8 PLUS SURFACE

50° VERY WIDE BEAM

STATIC WHITE



OVERVIEW

Solo 8 Plus Surface is a Constant Current single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has four site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The very wide beam in our 6.00W 515lm module has a peak intensity of 591cd. This product requires an external 350mA 17.15V Constant Current LED driver.


- UK PART L**
- Part L1A / L1B (Dwellings) ●
 - Part L2A (General)
 - Part L2A (Display) ●



PERFORMANCE


FWHM	50°	Category	IP20
Luminous Flux	415 lm	Material	Machined AL 6063-T6 Machined Brass
Peak Intensity	591 cd	Finishes	Brushed Aluminium White RAL9010 Black RAL9005 Rubbed Bronze* Polished Brass* Brushed Brass *
CCT	2400K 2700K 3000K 3500K 4000K	Weight	82g 0.18lb
CRI Min.	92: 2400K 98: 2700K/3000K/3500K 95: 4000K	Mounting	Surface mounting plate
Drive Current	350 mA	Movement	Pan 360° Tilt 90°
Nom. Voltage	17.15 V	Lockable	Pan
Max. Wattage	6.00 W	Accessories	N/A Louver Lenses 25mm (1")
Dimming	0-10V DALI	TM65 TM66	8.18kgCO2e 2.4
Driver Type	Constant Current Remote	Lifetime	L90B10 50,000hrs 5 year warranty
Class	SELV Class III		

DIMENSIONS

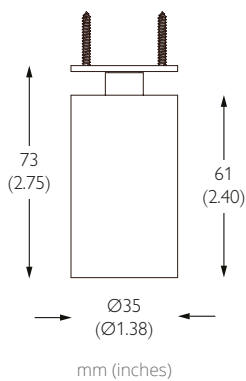

PHOTOMETRY

CCT	Multiplier
2400K	x0.97
2700K	x0.93
3000K	x1.00
3500K	x1.05
4000K	x1.05

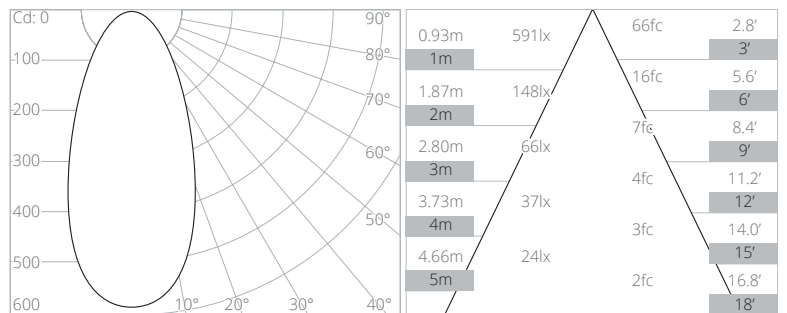

Data at 3000K

ORDER CODE

Model	Finish	CCT	Beam Angle
1111C	-	-	-
	WH White RAL 9010	2490 2400K 90CRI	NA Narrow 17°
	BK Black RAL 9005	2798 2700K 98CRI	ME Medium 24°
	AL Brushed Aluminium	3098 3000K 98CRI	WD Wide 35°
	RB Rubbed Bronze	3598 3500K 98CRI	VW Very Wide 50°
	PB Polished Brass	4095 4000K 95CRI	
	SB Brushed Brass		

Example Code: 1111C-WH-2798VW

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ
See Drivers, Power Supplies and Accessories sections for further order codes

DRIVERS

20W | DIMMING: DALI OR 0-10V

NO. OF LIGHTS PER DRIVER 1 to 2 in series

MIN DIM LEVEL 0.1%


VOLTAGE REGION 230V

FOR NORTH AMERICA No

WATTAGE 20W

SUPPLY TYPE Constant Current

DRIVER LOCATION Remote

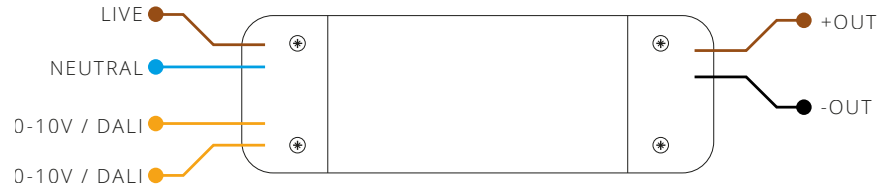

DALI CODE PSCC-20-350-D-EL

0-10V CODE PSCC-20-350-A-EL

LENGTH 160mm (6.30") WIDTH 41mm (1.63") HEIGHT 30mm (1.18")



30W | DIMMING: DALI OR 0-10V

NO. OF LIGHTS PER DRIVER 1 to 2 in series

MIN DIM LEVEL 0.1%


VOLTAGE REGION 120V

FOR NORTH AMERICA Yes

WATTAGE 30W

SUPPLY TYPE Constant Current

DRIVER LOCATION Remote

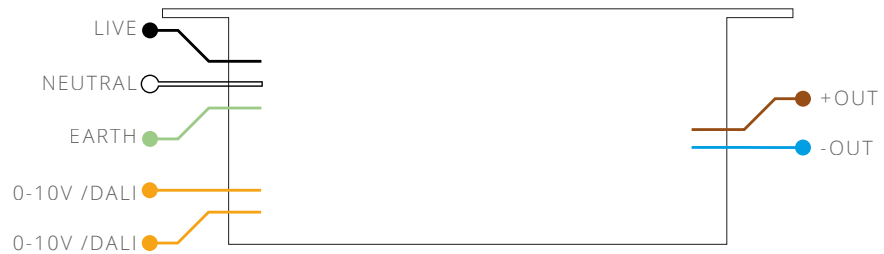

DALI CODE USCC-30-350-D-EL-ENC

0-10V CODE USCC-30-350-A-EL-ENC

LENGTH 348mm (13.7") WIDTH 65mm (2.6") HEIGHT 47mm (1.9")



12W | DIMMING: PHASE

NO. OF LIGHTS PER DRIVER 1

MIN DIM LEVEL 1%

VOLTAGE REGION 120V

FOR NORTH AMERICA Yes

WATTAGE 12W

SUPPLY TYPE Constant Current

DRIVER LOCATION Remote



PHASE CODE USCC-12-350-P-HT-ENC

LENGTH 247mm (9.7") WIDTH 65mm (2.6") HEIGHT 47mm (1.9")




SOLO 8 SERIES SPOTLIGHT ACCESSORIES

FOR USE WITH SOLO 8 | PLUS | WARM DIM | TUNABLE WHITE

ACCESSORIES

The Solo 8 series track and surface spotlights can accommodate 2 accessories with the provided accessory clip.

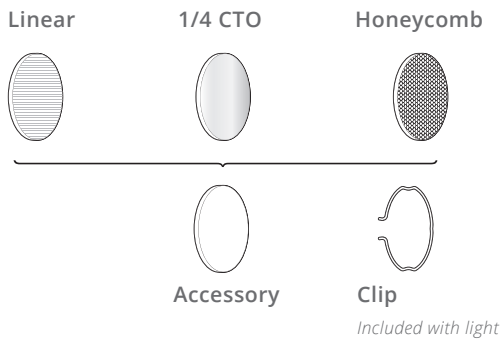


Honeycomb Louvre

Enhances glare control

THICKNESS 3.2mm (0.126")

DAIMETER 25mm (0.985")

PART CODE 995-25-BK




1/4 CTO Dichroic

CCT warming - approx 300K

THICKNESS 1.8mm (0.071")

DAIMETER 25mm (0.985")

PART CODE 997-1/4CTO-25




Linear Lens

Elongates beam

THICKNESS 1.5mm (0.059")

DAIMETER 25mm (0.985")

PART CODE HKFD-25-LIN



OPTICS

The Solo 8 series track and surface spotlights have field changeable primary optics.

Static White Optic

Primary beam angle control


DAIMETER 25mm (0.985")

NARROW CODE HKHG-25-15-PMMA

MEDIUM CODE HKHG-25-24-PMMA

WIDE CODE HKHG-25-36-PMMA

VERY WIDE CODE HKHG-25-50-PMMA



Tunable White Optic

Primary beam angle control

DAIMETER 25mm (0.985")

MEDIUM CODE HKRG-25-18-PMMA

WIDE CODE HKRG-25-24-PMMA

VERY WIDE CODE HKRG-25-36-PMMA

