

SOLO 8 TUNABLE WHITE SURFACE

25° MEDIUM BEAM

TUNABLE WHITE



OVERVIEW

Solo 8 Tunable White Surface is a constant current dual channel LED spotlight with the option of 2 CCT tuning ranges (1800-3000K / 2700-5000K) and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The medium beam in our 6.58W 400lm module has a peak intensity of 1475cd. This product requires an external dual channel constant current LED driver.


UK PART L Part L1A / L1B (Dwellings) ●
Part L2A (General)
Part L2A (Display) ●



PERFORMANCE


FWHM	25°	Category	IP20
Luminous Flux	356 lm	Material	Machined AL 6063-T6 Machined Brass
Peak Intensity	1475 cd	Finishes	Brushed Aluminium White RAL9010 Black RAL9005 Rubbed Bronze* Polished Brass* Brushed Brass *
CCT	1800-3000K 2700-5000K	Weight	82g 0.18lb
CRI Min.	94 TYP	Mounting	Surface mounting plate
Drive Current	188 mA	Movement	Pan 360° Tilt 90°
Nom. Voltage	35 V	Lockable	Pan
Max. Wattage	6.58 W	Accessories	N/A Louver Lenses 25mm (1")
Dimming	DALI DT6 DALI DT8	TM65 TM66	8.18kgCO2e 2.4
Driver Type	Constant Current Remote	Lifetime	L90B10 50,000hrs 5 year warranty
Class	SELV Class III		

DIMENSIONS

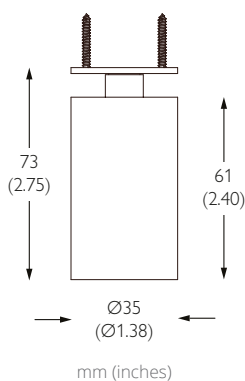

PHOTOMETRY

CCT	Multiplier
1800K	x0.57
2400K	x0.77
3000K	x1.00
4000K	x1.05
5000K	x1.06

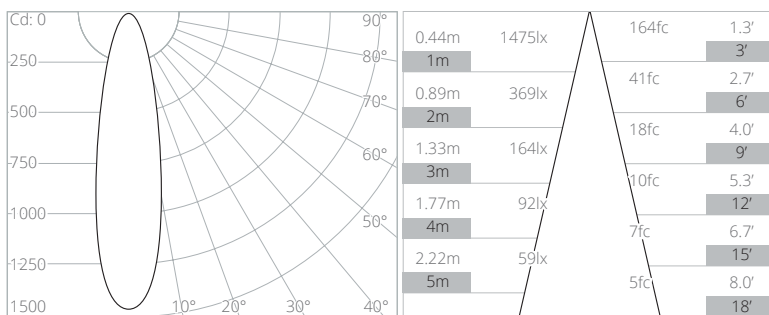

Data at 3000K

ORDER CODE

Model	Finish	CCT	Beam Angle
1111T	-	-	-
	WH White RAL 9010	T01 1800K-3000K 94CRI	ME Medium 25°
	BK Black RAL 9005	T02 2700K-5000K 94CRI	WD Wide 33°
	AL Brushed Aluminium		VW Very Wide 48°
	RB Rubbed Bronze		
	PB Polished Brass		
	SB Brushed Brass		

Example Code: 1111T-WH-T02ME

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ
See Drivers, Power Supplies and Accessories sections for further order codes

SOLO 8 TUNABLE WHITE SURFACE

33° WIDE BEAM

TUNABLE WHITE



OVERVIEW

Solo 8 Tunable White Surface is a constant current dual channel LED spotlight with the option of 2 CCT tuning ranges (1800-3000K / 2700-5000K) and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The wide beam in our 6.58W 400lm module has a peak intensity of 1045cd. This product requires an external dual channel constant current LED driver.


UK PART L Part L1A/ L1B (Dwellings) ●
Part L2A (General)
Part L2A (Display) ●



PERFORMANCE


FWHM	33°	Category	IP20
Luminous Flux	366 lm	Material	Machined AL 6063-T6 Machined Brass
Peak Intensity	1045 cd	Finishes	Brushed Aluminium White RAL9010 Black RAL9005 Rubbed Bronze* Polished Brass* Brushed Brass *
CCT	1800-3000K 2700-5000K	Weight	82g 0.18lb
CRI Min.	94 TYP	Mounting	Surface mounting plate
Drive Current	188 mA	Movement	Pan 360° Tilt 90°
Nom. Voltage	35 V	Lockable	Pan
Max. Wattage	6.58 W	Accessories	N/A Louver Lenses 25mm (1")
Dimming	DALI DT6 DALI DT8	TM65 TM66	8.18kgCO2e 2.4
Driver Type	Constant Current Remote	Lifetime	L90B10 50,000hrs 5 year warranty
Class	SELV Class III		

DIMENSIONS

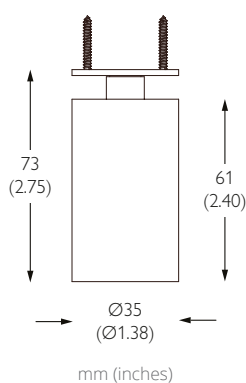

PHOTOMETRY

CCT	Multiplier
1800K	x0.57
2400K	x0.77
3000K	x1.00
4000K	x1.05
5000K	x1.06

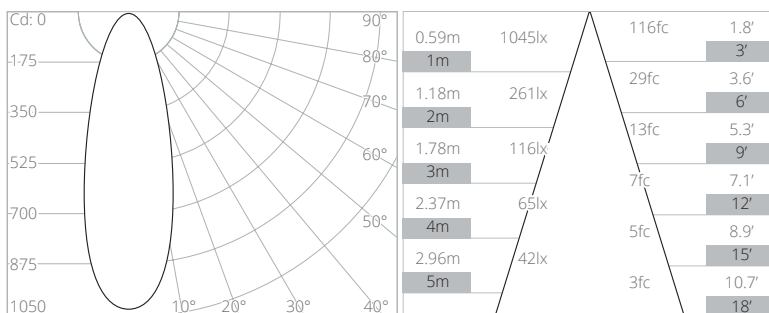

Data at 3000K

ORDER CODE

Model	Finish	CCT	Beam Angle
1111T	-	-	-
	WH White RAL 9010	T01 1800K-3000K 94CRI	ME Medium 25°
	BK Black RAL 9005	T02 2700K-5000K 94CRI	WD Wide 33°
	AL Brushed Aluminium		VW Very Wide 48°
	RB Rubbed Bronze		
	PB Polished Brass		
	SB Brushed Brass		

Example Code: 1111T-WH-T02WD

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ
See Drivers, Power Supplies and Accessories sections for further order codes

SOLO 8 TUNABLE WHITE SURFACE

48° VERY WIDE BEAM

TUNABLE WHITE



OVERVIEW

Solo 8 Tunable White Surface is a constant current dual channel LED spotlight with the option of 2 CCT tuning ranges (1800-3000K / 2700-5000K) and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The very wide beam in our 6.58W 400lm module has a peak intensity of 645cd. This product requires an external dual channel constant current LED driver.


UK PART L Part L1A / L1B (Dwellings) ●
Part L2A (General)
Part L2A (Display) ●



PERFORMANCE


FWHM	48°	Category	IP20
Luminous Flux	384 lm	Material	Machined AL 6063-T6 Machined Brass
Peak Intensity	645 cd	Finishes	Brushed Aluminium White RAL9010 Black RAL9005 Rubbed Bronze* Polished Brass* Brushed Brass *
CCT	1800-3000K 2700-5000K	Weight	82g 0.18lb
CRI Min.	94 TYP	Mounting	Surface mounting plate
Drive Current	188 mA	Movement	Pan 360° Tilt 90°
Nom. Voltage	35 V	Lockable	Pan
Max. Wattage	6.58 W	Accessories	N/A Louver Lenses 25mm (1")
Dimming	DALI DT6 DALI DT8	TM65 TM66	8.18kgCO2e 2.4
Driver Type	Constant Current Remote	Lifetime	L90B10 50,000hrs 5 year warranty
Class	SELV Class III		

DIMENSIONS

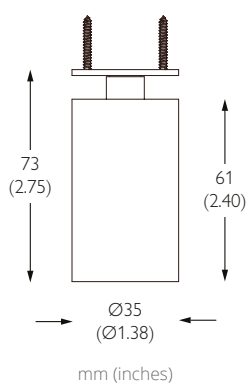

PHOTOMETRY

CCT	Multiplier
1800K	x0.57
2400K	x0.77
3000K	x1.00
4000K	x1.05
5000K	x1.06

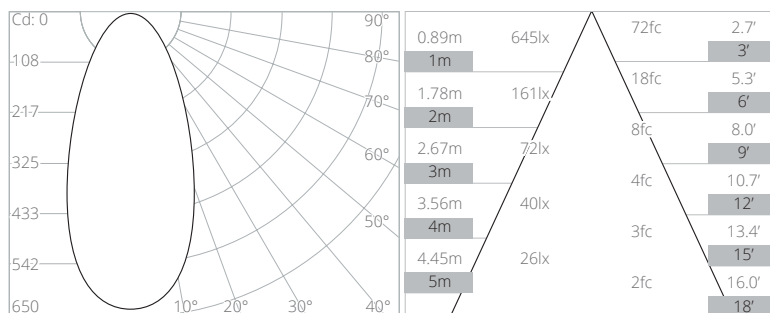

Data at 3000K

ORDER CODE

Model	Finish	CCT	Beam Angle
1111T	-	-	-
	WH White RAL 9010	T01 1800K-3000K 94CRI	ME Medium 25°
	BK Black RAL 9005	T02 2700K-5000K 94CRI	WD Wide 33°
	AL Brushed Aluminium		VW Very Wide 48°
	RB Rubbed Bronze		
	PB Polished Brass		
	SB Brushed Brass		

Example Code: 1111T-WH-T02VW

*Premium & custom finishes are built to order, subject to an extended lead time & MOQ
See Drivers, Power Supplies and Accessories sections for further order codes

SOLO 8 TUNABLE WHITE SURFACE

DRIVERS

20W | DALI DT6 OR DT8

NO. OF LIGHTS PER DRIVER 1

MIN DIM LEVEL 0.1%

VOLTAGE REGION 230V

FOR NORTH AMERICA No

WATTAGE 20W

SUPPLY TYPE Constant Current

DRIVER LOCATION Remote



DT6 CODE 1800-3000K PSCC-RM-1110T01-01D

CODE 2700-5000K PSCC-RM-1110T02-01D

DT8 CODE 1800-3000K PSCC-RM-1110T01-01E

CODE 2700-5000K PSCC-RM-1110T02-01E

LENGTH 184mm (7.22") WIDTH 41mm (1.63") HEIGHT 30mm (1.18")



30W | DALI DT6 OR DT8

NO. OF LIGHTS PER DRIVER 1

MIN DIM LEVEL 0.1%


VOLTAGE REGION 120V

FOR NORTH AMERICA Yes

WATTAGE 30W

SUPPLY TYPE Constant Current

DRIVER LOCATION Remote

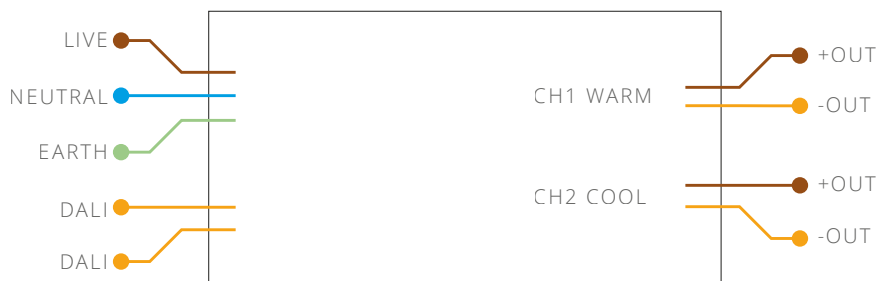

DT6 CODE 1800-3000K USCC-RM-1110T01-01D

CODE 2700-5000K USCC-RM-1110T02-01D

DT8 CODE 1800-3000K USCC-RM-1110T01-01E

CODE 2700-5000K USCC-RM-1110T02-01E

LENGTH 348mm (13.7") WIDTH 107mm (4.2") HEIGHT 51mm (2.0")



50W | 0-10V DIM 0-10V CCT

NO. OF LIGHTS PER DRIVER 1

MIN DIM LEVEL 0.1%


VOLTAGE REGION 120V

FOR NORTH AMERICA Yes

WATTAGE 50W

SUPPLY TYPE Constant Current

DRIVER LOCATION Remote

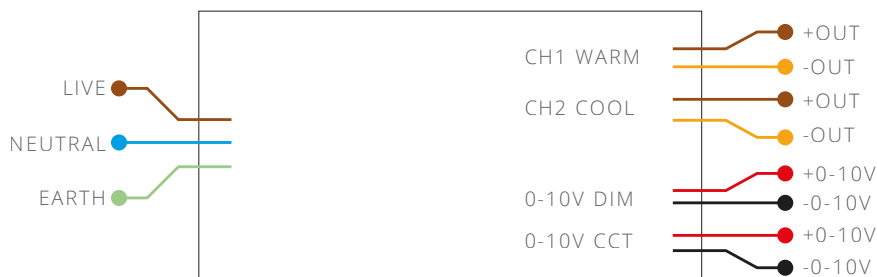

ORDER CODE 1800-3000K USCC-RM-1110T01-01A

ORDER CODE 2700-5000K USCC-RM-1110T02-01A

LENGTH 348mm (13.7") WIDTH 107mm (4.2") HEIGHT 51mm (2.0")




SOLO 8 SERIES SPOTLIGHT ACCESSORIES

FOR USE WITH SOLO 8 | PLUS | WARM DIM | TUNABLE WHITE

ACCESSORIES

The Solo 8 series track and surface spotlights can accommodate 2 accessories with the provided accessory clip.

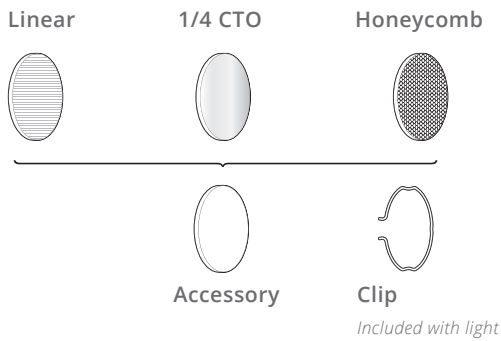


Honeycomb Louvre

Enhances glare control

THICKNESS 3.2mm (0.126")

DAIMETER 25mm (0.985")

PART CODE 995-25-BK




1/4 CTO Dichroic

CCT warming - approx 300K

THICKNESS 1.8mm (0.071")

DAIMETER 25mm (0.985")

PART CODE 997-1/4CTO-25




Linear Lens

Elongates beam

THICKNESS 1.5mm (0.059")

DAIMETER 25mm (0.985")

PART CODE HKFD-25-LIN



OPTICS

The Solo 8 series track and surface spotlights have field changeable primary optics.

Static White Optic

Primary beam angle control


DAIMETER 25mm (0.985")

NARROW CODE HKHG-25-15-PMMA

MEDIUM CODE HKHG-25-24-PMMA

WIDE CODE HKHG-25-36-PMMA

VERY WIDE CODE HKHG-25-50-PMMA



Tunable White Optic

Primary beam angle control

DAIMETER 25mm (0.985")

MEDIUM CODE HKRG-25-18-PMMA

WIDE CODE HKRG-25-24-PMMA

VERY WIDE CODE HKRG-25-36-PMMA

