




### Finish Options



Black Painted

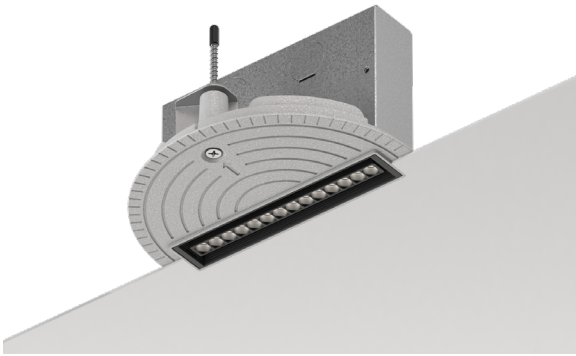


White Painted

### Features

- Flawless beam quality from a unique micro-linear form factor
- Narrow 15° TIR native beam is aimable +/- 30°
- Louvers available for 15°, 30°, and 60° beams
- Snap-on optics available to easily adjust beam angle in the field
- For ceiling thicknesses from 0.5" up to 1.25"
- LED Module is field serviceable from below the ceiling.
- 24VDC Class 2
- Wet Rated
- Wall Wash optic provides even illumination starting from the top of the wall to the bottom
- Wall Wash recommended spacing is 2ft from the wall and 2ft on-center
- Fixture is IC rated and does not require a housing or pan.



### Product Dimensions

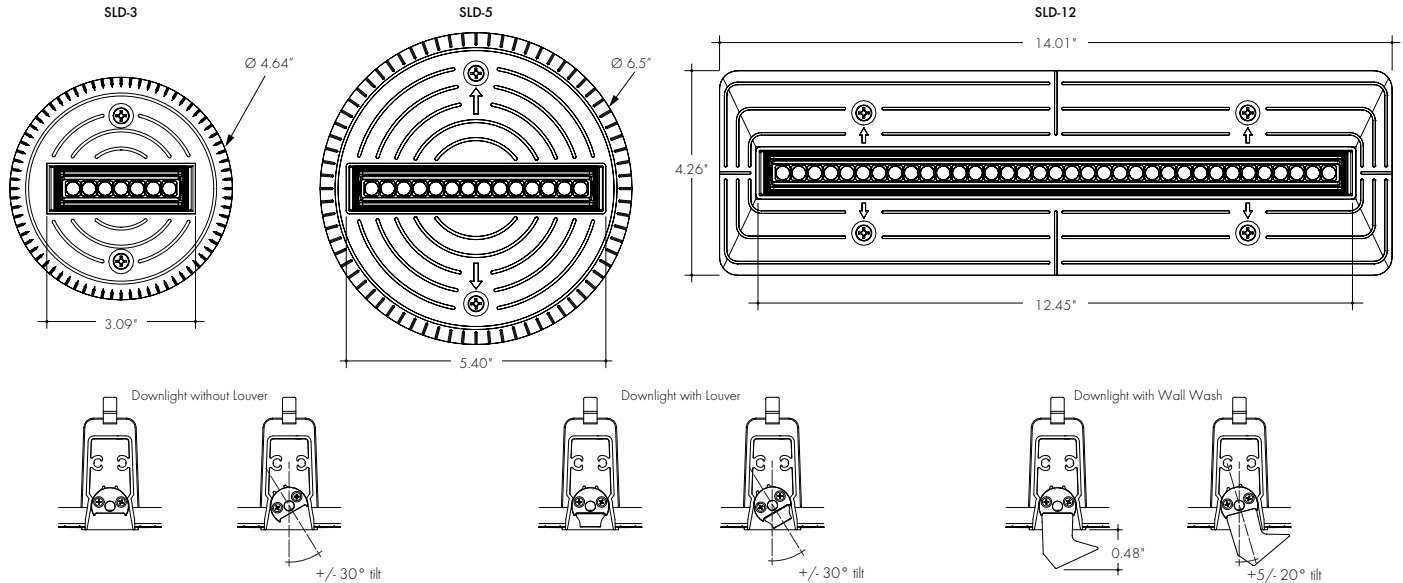

### Technical Information

| TYPE                         | Stenos           |                  |                  | OPTIC | TRANSMISSION |
|------------------------------|------------------|------------------|------------------|-------|--------------|
| LENGTH OPTIONS (15° OPTIC)   | 3                | 5                | 12               | 15    | 100%         |
| Lumen Output (3000K)         | 274 lm           | 546 lm           | 1323 lm          | LV15  | 60%          |
| Beam Spread (FWHM)           | 14°              | 14°              | 14°              | LV30  | 65%          |
| Center Beam Intensity (CBCP) | 1612 cd          | 3288 cd          | 8541 cd          | LV60  | 50%          |
| Power Consumption            | 2.8 W            | 5.4 W            | 13.5 W           | WW    | 47%          |
| Efficacy                     | 98 lm/W          | 101 lm/W         | 98 lm/W          | LU    | 35%          |
| Aesthetic                    | Regressed Baffle | Regressed Baffle | Regressed Baffle | EL    | 81%          |

| CCT   | Multiplier<br>(reference - 3000K) | TM-30 |                |                |                |
|-------|-----------------------------------|-------|----------------|----------------|----------------|
|       |                                   | CRI   | R <sub>f</sub> | R <sub>g</sub> | R <sub>9</sub> |
| 2700K | 0.96                              | 93    | 93             | 98             | 56             |
| 3000K | 1.00                              | 94    | 91             | 97             | 60             |
| 3500K | 1.07                              | 94    | 92             | 99             | 63             |
| 4000K | 1.11                              | 92    | 91             | 99             | 59             |

### Ordering Code | Directional Module

| MODEL                                  | LENGTH                              | CCT                                                      | OUTPUT        | OPTIC                                                                                                                                                                                                                                       | FINISH     |
|----------------------------------------|-------------------------------------|----------------------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| SLD - Stenos Trimless Linear Downlight | 3 - 2.9"<br>5 - 5.3"<br>12 - 12.36" | 27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>40K - 4000K | SO - Standard | 15 - 15° Optic<br>LV15 - 15° Louver <sup>1</sup><br>LV30 - 30° Louver and Optic<br>LV60 - 60° Louver and Optic<br>WW - Wall Wash Optic <sup>2</sup><br>LU - 15° Bullseye Louver <sup>3</sup><br>EL - 15° x 45° Elliptical Lens <sup>4</sup> | BK - Black |

1 - LV15° Louver reduces glare while maintaining 90% of CBCP when compared to standard 15° optic  
2 - WW Wall Wash not available with the 3inch option.  
3 - LU Bullseye Louver reduces glare while maintaining 75% of CBCP.  
4 - Only available in BK Black.





### Ordering Code | Accessories

| MODEL                  | ACCESSORY                                                                                                                                                                                                    | LENGTH                              | FINISH                   |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------|
| SAC - Stenos Accessory | LV15 - 15° Louver<br>LV30 - 30° Louver and Optic<br>LV60 - 60° Louver and Optic<br>WW - Wall Wash Optic <sup>2</sup><br>LU - 15° Bullseye Louver <sup>1</sup><br>EL - 15° x 45° Elliptical Lens <sup>1</sup> | 3 - 2.9"<br>5 - 5.3"<br>12 - 12.36" | BK - Black<br>WH - White |





1 - WW Wall Wash, LU Bullseye Louver, and EL Elliptical Lens only available in BK Black.  
2 - WW Wall Wash not available with the 3inch option.

### Product Dimensions






#### SLD-3

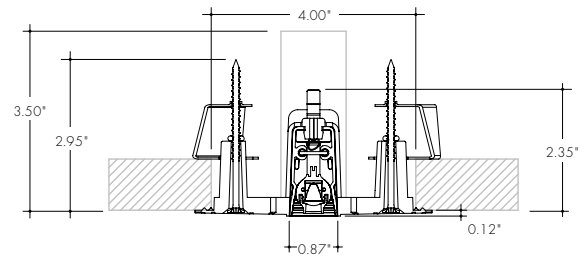

#### SLD-5

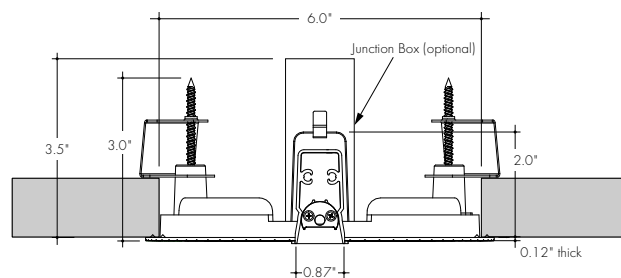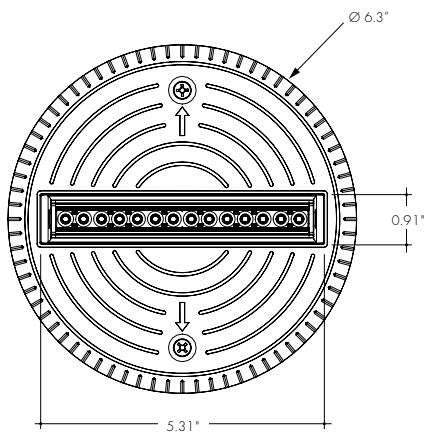

#### SLD-12

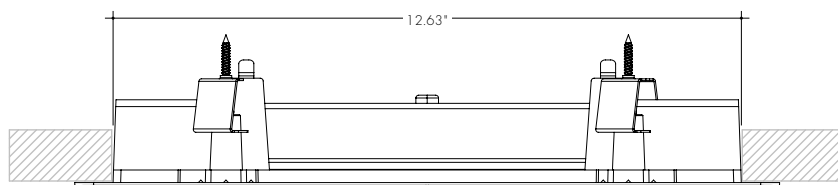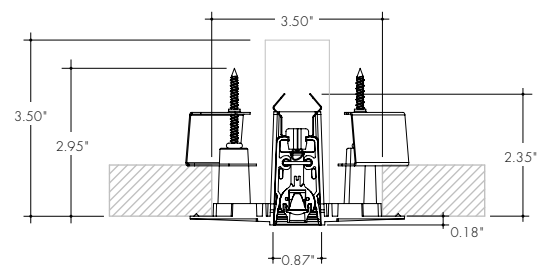
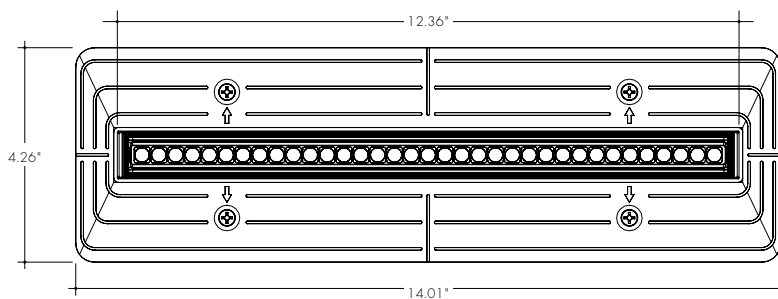


Light Transmission



| Length Options | Transmission Percentages |      |      |      |     |
|----------------|--------------------------|------|------|------|-----|
|                | 15                       | LV15 | LV30 | LV60 | WW  |
| SLD-3          | 100%                     | 55%  | 65%  | 51%  | N/A |
| SLD-5          | 100%                     | 61%  | 64%  | 49%  | 50% |
| SLD-12         | 100%                     | 60%  | 66%  | 51%  | 44% |

Photometry SLD-3

SLD-3-30K-SO-15-BK/WH

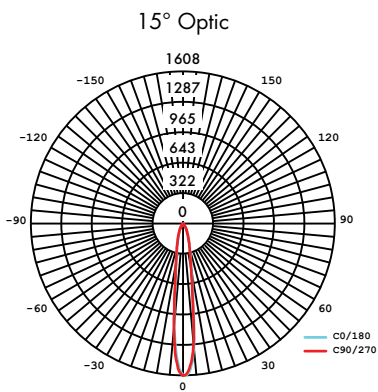



SLD-3-30K-SO-LV15-BK/WH

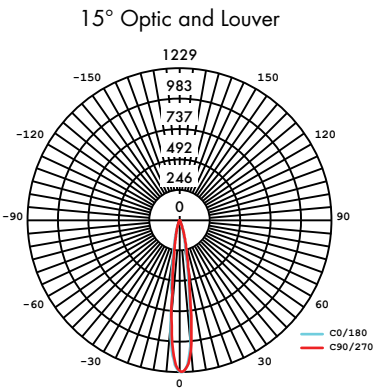



### Photometry SLD-3




**SLD-3-30K-SO-LV30-BK/WH**

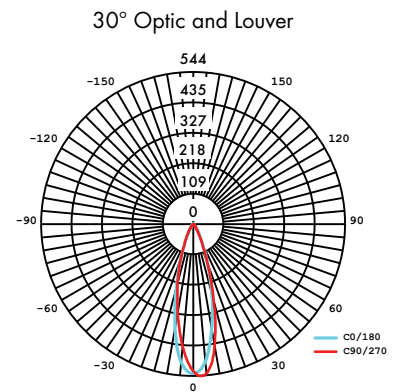




**SLD-3-30K-SO-LV60-BK/WH**

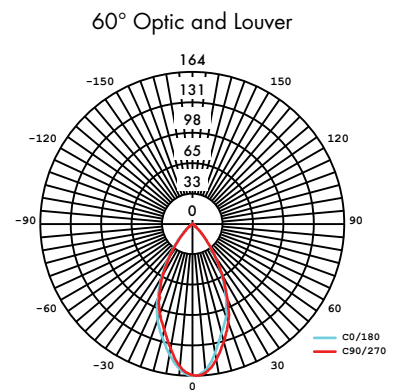

**SLD-3-30K-SO-EL-BK/WH**

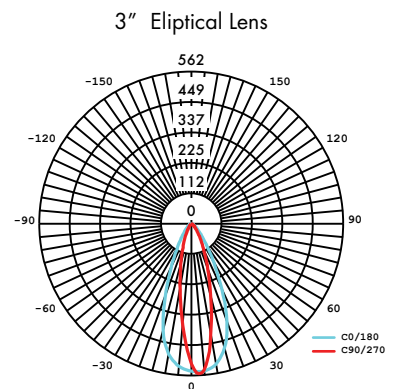



**SLD-3-30K-SO-LU-BK/WH**

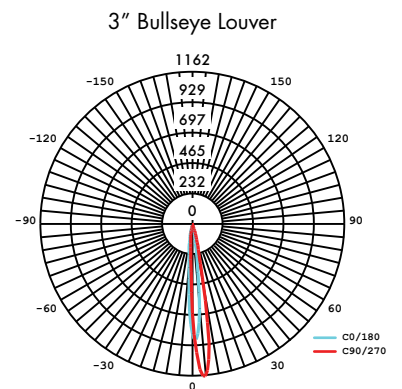


Photometry SLD-5


SLD-5-30K-SO-15-BK/WH

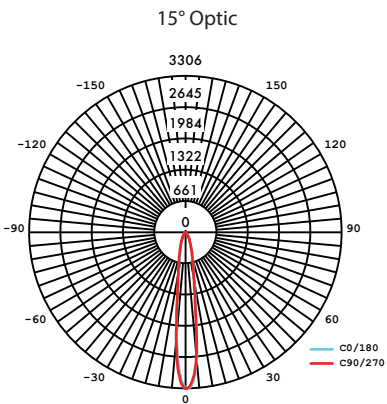


SLD-5-30K-SO-LV15-BK/WH

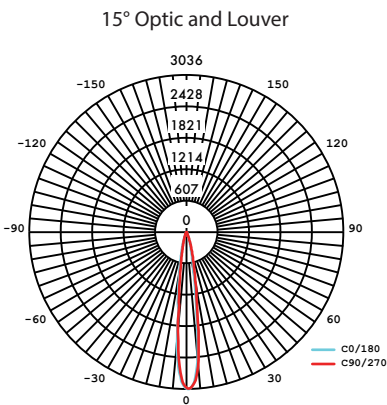

SLD-5-30K-SO-LV30-BK/WH

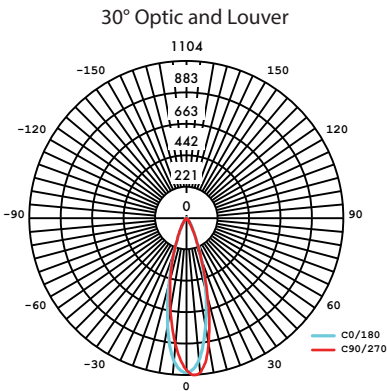



SLD-5-30K-SO-LV60-BK/WH

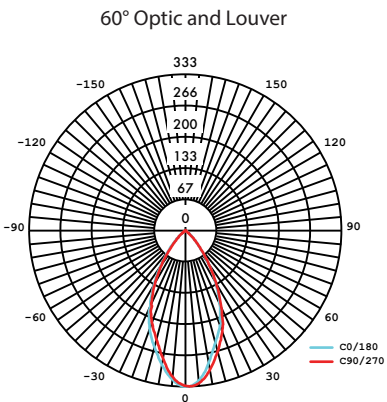






Photometry SLD-5


SLD-5-30K-SO-WW-BK/WH

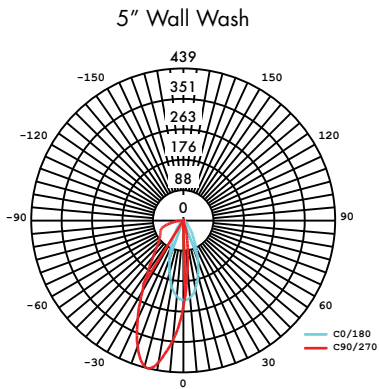

SLD-5-30K-SO-EL-BK/WH

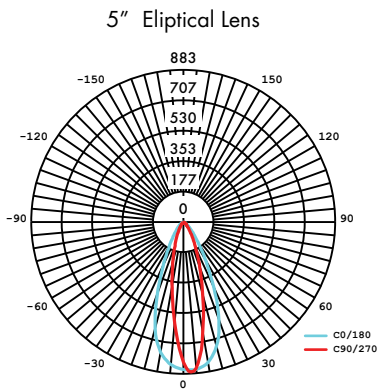



SLD-5-30K-SO-LU-BK/WH


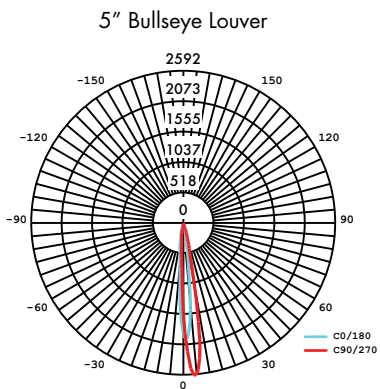


Photometry SLD-12



SLD-12-30K-SO-15-BK/WH

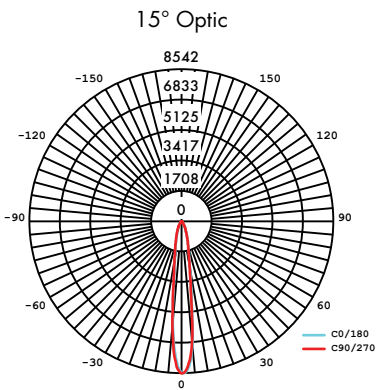



SLD-12-30K-SO-LV15-BK/WH

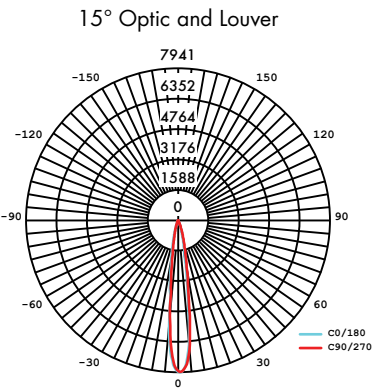

SLD-12-30K-SO-LV30-BK/WH

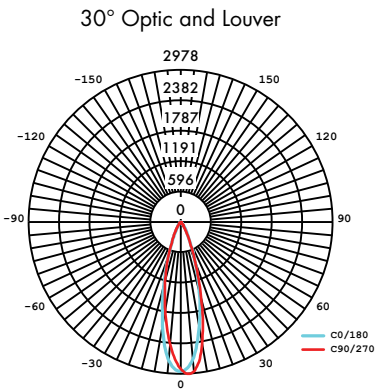



SLD-12-30K-SO-LV60-BK/WH


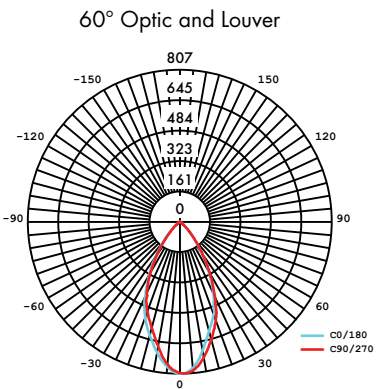



Photometry SLD-12



SLD-12-30K-SO-WW-BK/WH

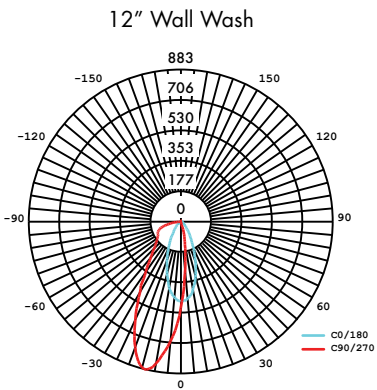

SLD-12-30K-SO-EL-BK/WH

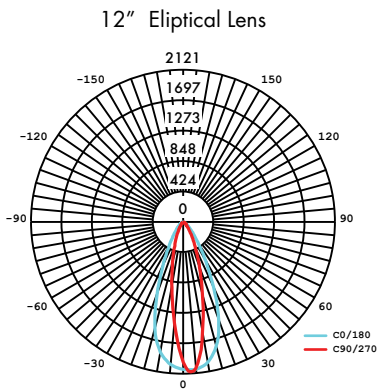

SLD-12-30K-SO-LU-BK/WH

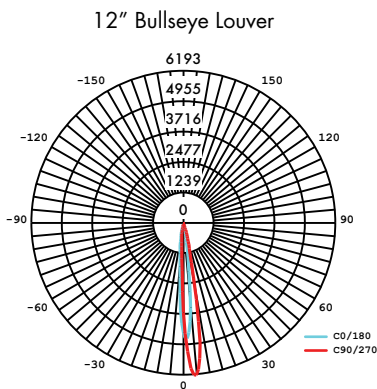




## TM-30-15-Data

## 27K CCT

Color Vector Graphic

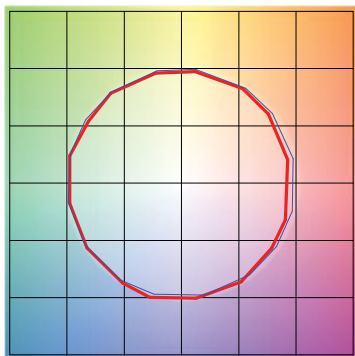
Test —  
Reference —

Graphic Shifts (%)

| Hue Bin | Rf   | Chroma | Hue   |
|---------|------|--------|-------|
| 1       | 89.9 | -5.0%  | 0.1%  |
| 2       | 92.9 | -3.1%  | 1.7%  |
| 3       | 93.7 | -1.9%  | 2.2%  |
| 4       | 96.3 | -2.2%  | -0.2% |
| 5       | 96.2 | -1.7%  | 1.5%  |
| 6       | 96.3 | -0.5%  | 1.1%  |
| 7       | 95.4 | -2.6%  | -0.3% |
| 8       | 96.7 | 0.4%   | 1.8%  |
| 9       | 96.1 | -1.0%  | 1.8%  |
| 10      | 94.6 | 0.0%   | 2.7%  |
| 11      | 95.6 | 1.2%   | 3.1%  |
| 12      | 90.5 | 3.4%   | -2.9% |
| 13      | 89.1 | 1.2%   | -7.6% |
| 14      | 86.8 | 1.0%   | -9.8% |
| 15      | 91.1 | -2.8%  | -3.6% |
| 16      | 85.7 | -4.5%  | -8.6% |

## 30K CCT

Color Vector Graphic

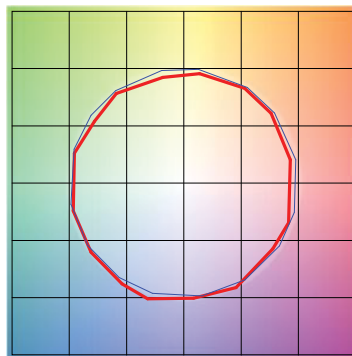
Test —  
Reference —

Graphic Shifts (%)

| Hue Bin | Rf   | Chroma | Hue    |
|---------|------|--------|--------|
| 1       | 89.2 | -4.7%  | 1.2%   |
| 2       | 93.0 | -2.6%  | 1.4%   |
| 3       | 94.6 | -1.7%  | 1.3%   |
| 4       | 93.3 | -3.5%  | -1.7%  |
| 5       | 92.1 | -6.1%  | 0.1%   |
| 6       | 95.0 | -2.3%  | 0.9%   |
| 7       | 89.6 | -5.4%  | 2.6%   |
| 8       | 89.6 | -0.9%  | 3.4%   |
| 9       | 89.6 | -0.8%  | 6.0%   |
| 10      | 89.6 | 0.8%   | 6.4%   |
| 11      | 90.5 | 3.1%   | 5.0%   |
| 12      | 88.8 | 5.6%   | -3.3%  |
| 13      | 89.1 | 0.5%   | -7.5%  |
| 14      | 86.1 | 1.5%   | -10.1% |
| 15      | 86.3 | -3.3%  | -5.3%  |
| 16      | 84.5 | -3.1%  | -9.9%  |

## 35K CCT

Color Vector Graphic

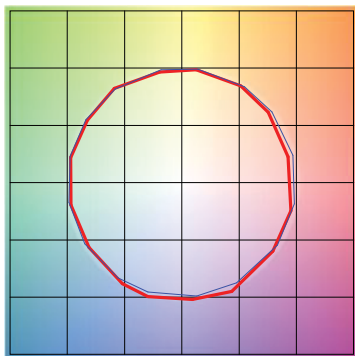
Test —  
Reference —

Graphic Shifts (%)

| Hue Bin | Rf   | Chroma | Hue   |
|---------|------|--------|-------|
| 1       | 90.9 | -4.5%  | -0.4% |
| 2       | 93.4 | -2.7%  | 1.7%  |
| 3       | 92.4 | -1.2%  | 3.2%  |
| 4       | 95.7 | -0.9%  | 1.2%  |
| 5       | 94.8 | -1.6%  | 1.4%  |
| 6       | 96.9 | 1.0%   | 0.4%  |
| 7       | 95.8 | -1.5%  | -0.3% |
| 8       | 97.3 | -0.6%  | 0.9%  |
| 9       | 94.9 | -1.4%  | 2.5%  |
| 10      | 91.4 | -1.3%  | 4.7%  |
| 11      | 89.2 | 2.3%   | 5.9%  |
| 12      | 90.0 | 4.0%   | 0.7%  |
| 13      | 92.5 | 2.2%   | -4.2% |
| 14      | 88.2 | 3.6%   | -7.8% |
| 15      | 89.0 | -0.5%  | -6.6% |
| 16      | 87.4 | -1.6%  | -6.6% |

## 40K CCT

Color Vector Graphic

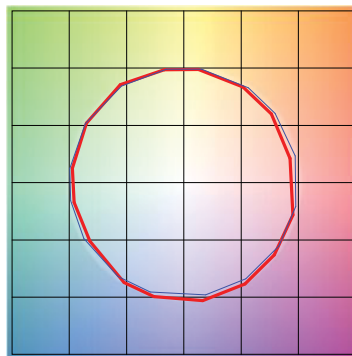Test —  
Reference —


Graphic Shifts (%)

| Hue Bin | Rf   | Chroma | Hue   |
|---------|------|--------|-------|
| 1       | 90.1 | -4.9%  | -1.3% |
| 2       | 93.4 | -3.0%  | 1.5%  |
| 3       | 90.0 | -2.0%  | 4.3%  |
| 4       | 94.1 | -0.6%  | 2.7%  |
| 5       | 93.6 | -0.2%  | 2.2%  |
| 6       | 96.4 | 1.6%   | 0.2%  |
| 7       | 97.0 | -0.7%  | -1.1% |
| 8       | 95.2 | -2.0%  | -0.5% |
| 9       | 93.8 | -2.7%  | 2.1%  |
| 10      | 89.7 | -3.3%  | 4.7%  |
| 11      | 87.1 | 1.6%   | 7.4%  |
| 12      | 89.0 | 3.4%   | 3.8%  |
| 13      | 90.8 | 4.3%   | -3.5% |
| 14      | 93.2 | 3.4%   | -3.1% |
| 15      | 87.0 | 0.8%   | -8.6% |
| 16      | 86.0 | -1.0%  | -7.9% |

### Mounting Options (optional)

#### RMP-3-L-R


Recessed New Construction Mounting Pan,  
3" Trimless Linear Downlight

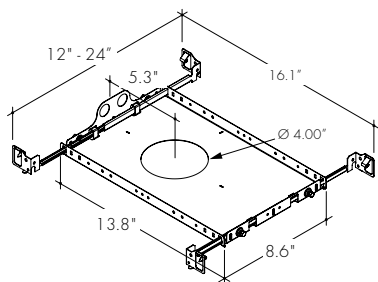

Includes Hanger Bar set (PF-HB-ALL), extendable from 14" to 24". Knock-outs are Ø0.875".

#### JB-3L


Junction Box 3" Trimless Linear Downlight



Junction box for wire termination and to create an Airtight enclosure.

#### JB-3L-CP


Chicago Plenum Junction Box,  
3" Trimless Linear Downlight



Junction box for wire termination and to create a Chicago Plenum rated enclosure.

#### RHI-3-L-R


Recessed New Construction Housing, IC Rated,  
3" Trimless Linear Downlight

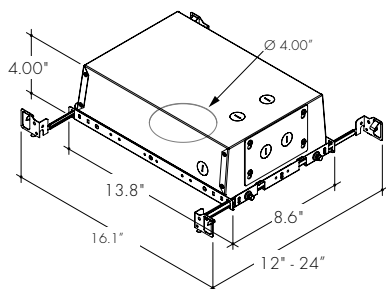

Includes Hanger Bar set (PF-HB-ALL), extendable from 14" to 24". Knock-outs are Ø0.875". Can be used for spray foam insulation.



#### RHC-3-L-R

Recessed New Construction Housing, Chicago Plenum Rated  
3" Trimless Linear Downlight

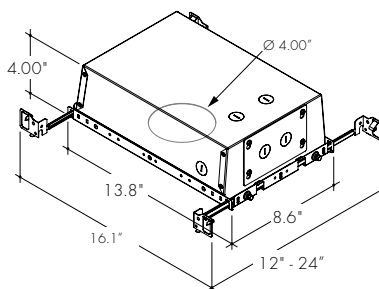

Includes Hanger Bar set (PF-HB-ALL), extendable from 14" to 24". Knock-outs are Ø0.875". Can be used for spray foam insulation.


### Components

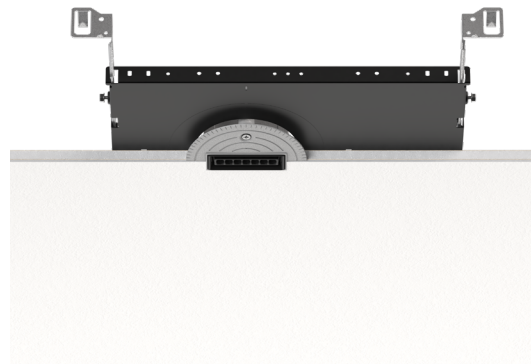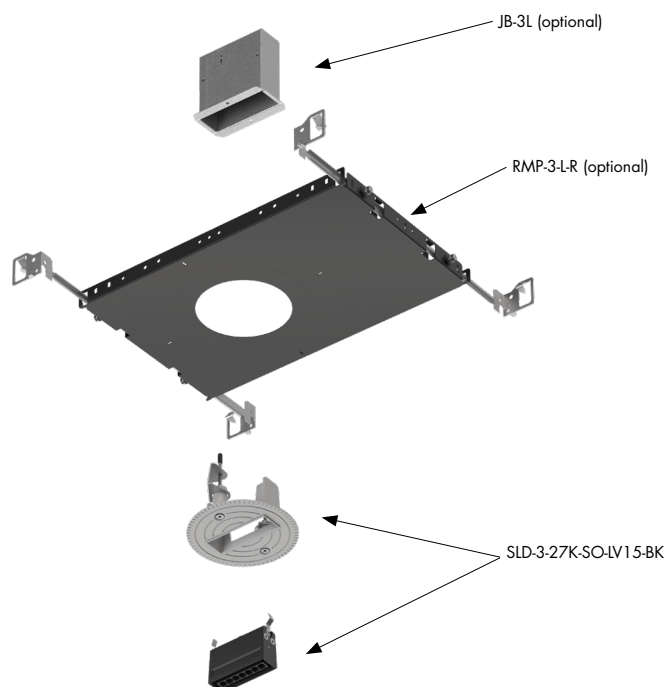

### Mounting Options (optional)

#### RMP-5-L-R


Recessed New Construction Mounting Pan,  
5" Trimless Linear Downlight

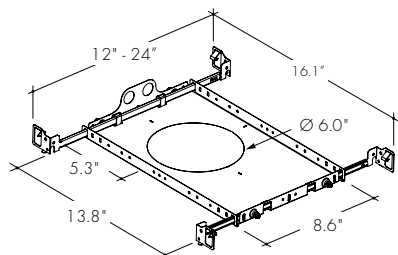

Includes Hanger Bar set (PF-HB-ALL), extendable from 14" to 24". Knock-outs are Ø0.875".

#### JB-5L


Junction Box 5" Trimless Linear Downlight



Junction box for wire termination and to create an Airtight enclosure.

#### JB-5L-CP


Chicago Plenum Junction Box,  
5" Trimless Linear Downlight



Junction box for wire termination and to create a Chicago Plenum rated enclosure.

#### RHI-5-L-R


Recessed New Construction Housing, IC Rated,  
5" Trimless Linear Downlight

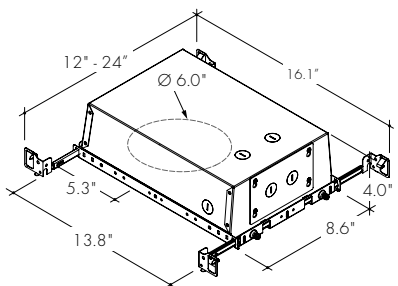

Includes Hanger Bar set (PF-HB-ALL), extendable from 14" to 24". Knock-outs are Ø0.875". Can be used for spray foam insulation.



#### RHC-5-L-R

Recessed New Construction Housing, Chicago Plenum Rated  
5" Trimless Linear Downlight

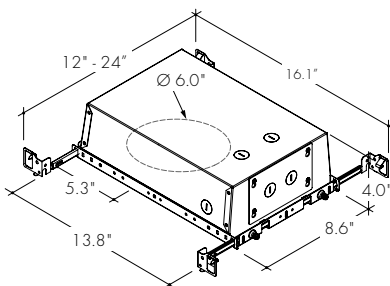


Includes Hanger Bar set (PF-HB-ALL), extendable from 14" to 24". Knock-outs are Ø0.875". Can be used for spray foam insulation.

### Components

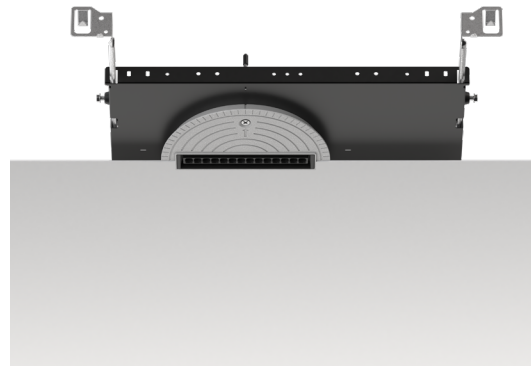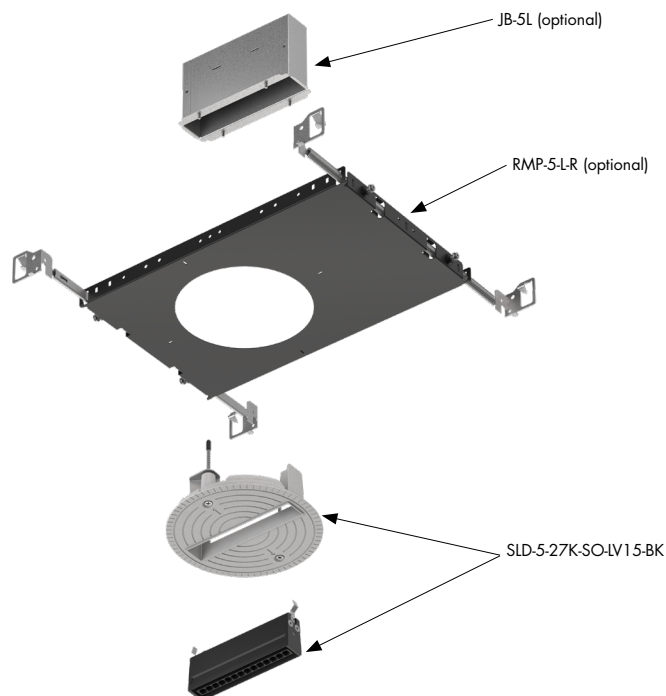


Mounting Options (optional)

**RMP-12-L-R**  
Recessed New Construction Mounting Pan,  
12" Trimless Linear Downlight

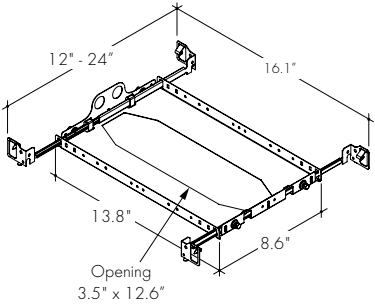


Includes Hanger Bar set (PF-HB-ALL), extendable from 14" to 24".  
Knock-outs are Ø0.875".

**JB-12L**  
Junction Box 12" Trimless Linear Downlight

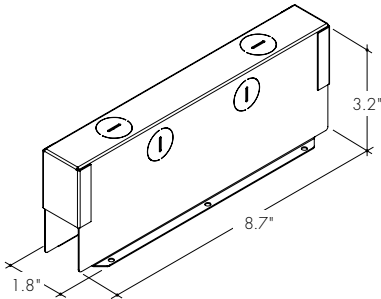



Junction box for wire termination and to create an Airtight enclosure.

**JB-12L-CP**  
Chicago Plenum Junction Box,  
12" Trimless Linear Downlight



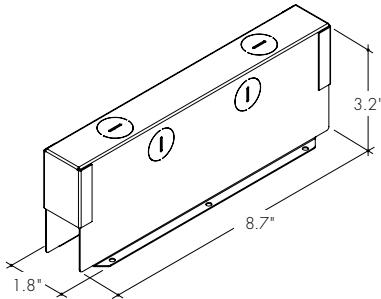


Junction box for wire termination and to create a Chicago Plenum rated enclosure.

Components

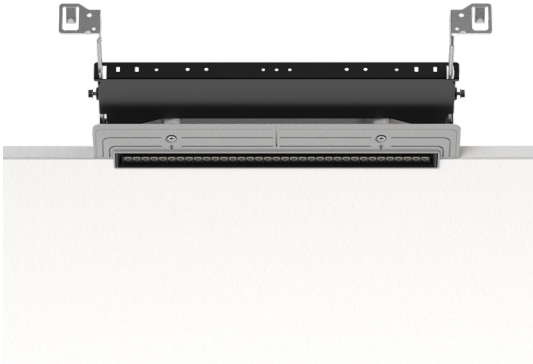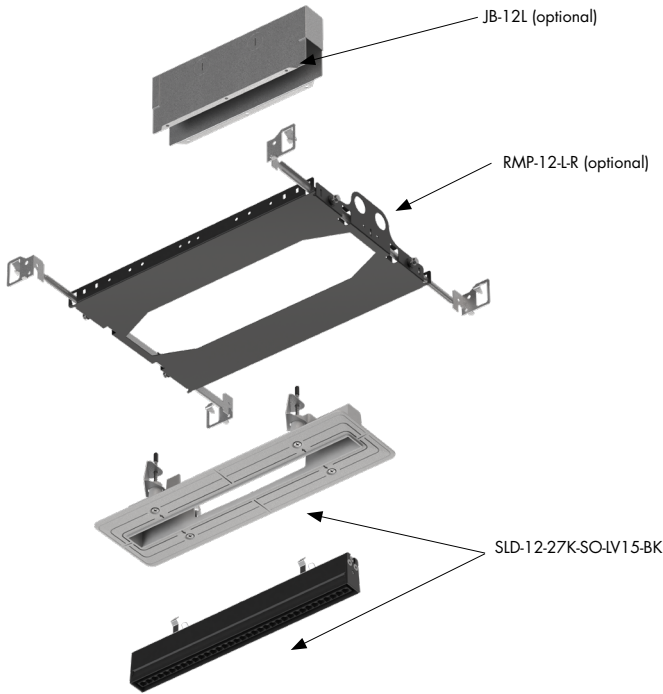

Field Serviceability

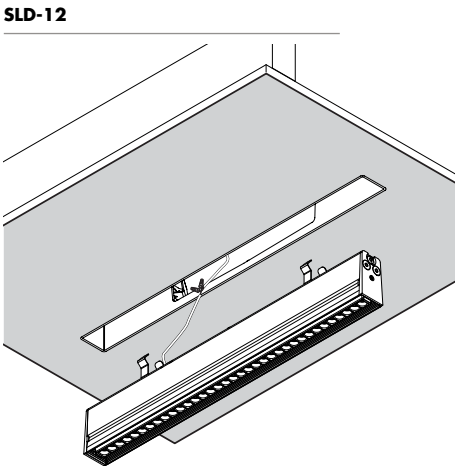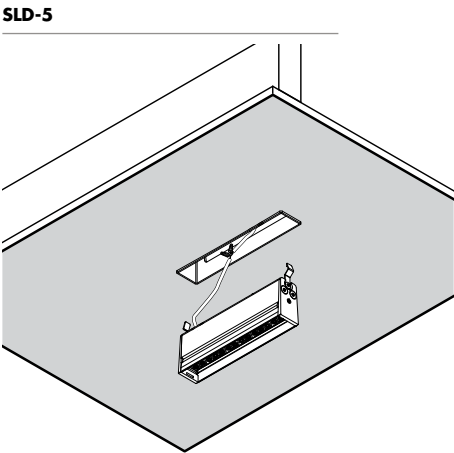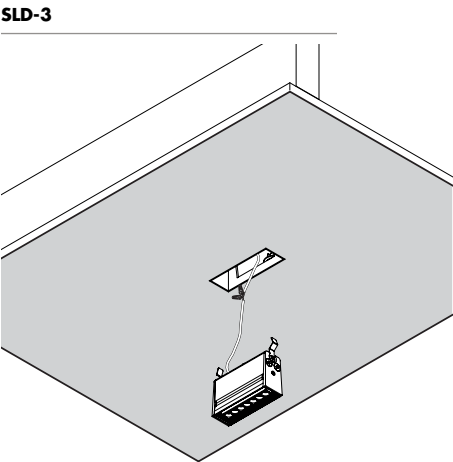

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



### Ordering Code Universal Dimming Power Supplies 1% 120VAC - 277VAC

| MODEL                          | INPUT CONTROL                       | ENVIRONMENT | WATTAGE                                                      | OUTPUT    |
|--------------------------------|-------------------------------------|-------------|--------------------------------------------------------------|-----------|
| PS-Power Supply,<br>120-277VAC | UNI-0-10V Dimming,<br>Phase Dimming | W-Wet       | 30-30 Watts<br>60-60 Watts<br>96-96 Watts<br>3x96-3x96 Watts | 24-24 VDC |

Compatibility: View a complete list of compatible dimmers on product page ([Link](#))

0-10V - 1% dimming  
MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart

| MODELS | PS-UNI-W-30W | PS-UNI-W-60W | PS-UNI-W-96W | PS-UNI-W-3X96W |
|--------|--------------|--------------|--------------|----------------|
| Length | 6.50"        | 7.40"        | 8.66"        | 11.85"         |
| Width  | 3.73"        | 3.73"        | 3.73"        | 4.32"          |
| Depth  | 1.61"        | 1.61"        | 1.61"        | 1.81"          |

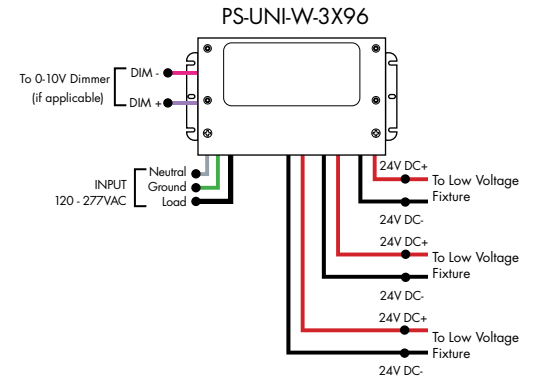
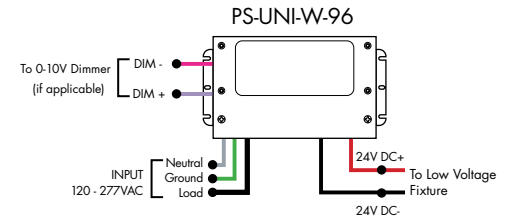


### Ordering Code 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                          | INPUT CONTROL                                                                             | ENVIRONMENT | WATTAGE                        | OUTPUT    |
|--------------------------------|-------------------------------------------------------------------------------------------|-------------|--------------------------------|-----------|
| PS-Power Supply,<br>120-277VAC | 010V-LIN-0-10V Dimming (0.1%),<br>Linear<br>010V-LOG-0-10V Dimming (0.1%),<br>Logarithmic | D-Dry       | 96-96 Watts<br>3X96-3x96 Watts | 24-24 VDC |

| MODELS | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.45"  |


#### PS-010V-LIN/LOG-D-3X96

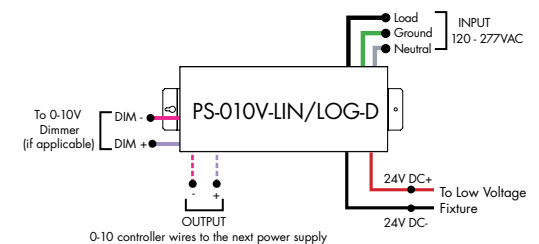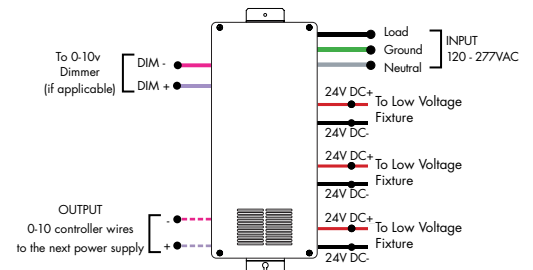

### Athena 0-10V LED Driver

| MODEL                          | INPUT CONTROL                                                               | ENVIRONMENT | WATTAGE | OUTPUT    | FEATURE     |
|--------------------------------|-----------------------------------------------------------------------------|-------------|---------|-----------|-------------|
| PS-Power Supply,<br>120-277VAC | 010V-LIN-0-10V Dimming,<br>Linear<br>010V-LOG-0-10V Dimming,<br>Logarithmic | D-Dry       | 96-96 W | 24-24 VDC | AWNR-Athena |

| MODELS | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |

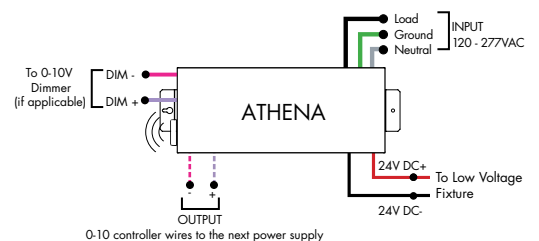




## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

## Ordering Code DALI1 Dimming Power Supplies 0.1% 120VAC - 277VAC

| MODEL                       | INPUT CONTROL    | ENVIRONMENT | WATTAGE                        | OUTPUT    |
|-----------------------------|------------------|-------------|--------------------------------|-----------|
| PS-Power Supply, 120-277VAC | DALI-DALI (0.1%) | D-Dry       | 96-96 Watts<br>3X96-3X96 Watts | 24-24 VDC |

| Model  | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.56"  |

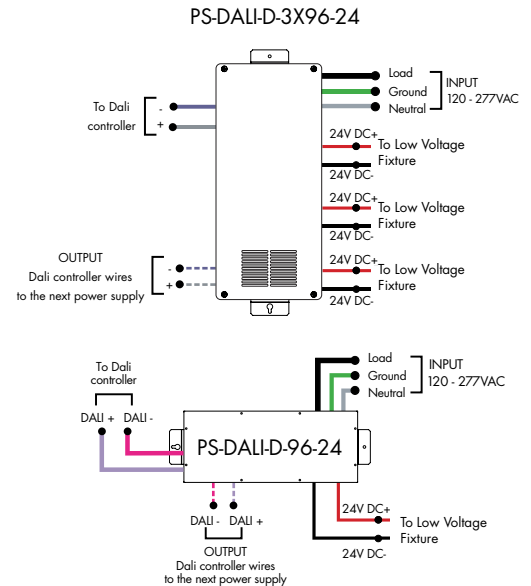


## Ordering Code DMX Dimming Power Supplies 0.1% 120VAC - 277VAC Requires Zonal Control

| MODEL                       | INPUT CONTROL  | ENVIRONMENT | WATTAGE                        | OUTPUT    |
|-----------------------------|----------------|-------------|--------------------------------|-----------|
| PS-Power Supply, 120-277VAC | DMX-DMX (0.1%) | D-Dry       | 96-96 Watts<br>3X96-3X96 Watts | 24-24 VDC |

\*Zonal control power supplies. Control multiple tapes/zones using DMX channels.


| MODELS | 96W    | 3X96   |
|--------|--------|--------|
| Length | 14.40" | 15.00" |
| Width  | 5.20"  | 6.62"  |
| Depth  | 2.60"  | 4.56"  |

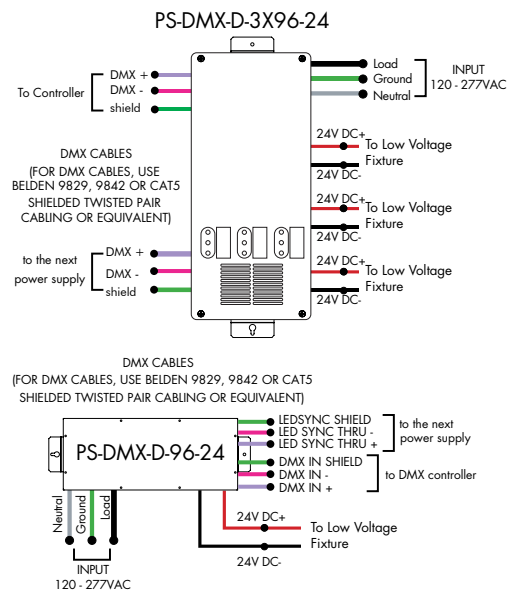

## Ordering Code Enlightened Enabled Dimming Power Supplies 1% 120VAC - 277VAC

| MODEL                       | INPUT CONTROL           | ENVIRONMENT | WATTAGE     | OUTPUT    | FEATURE               |
|-----------------------------|-------------------------|-------------|-------------|-----------|-----------------------|
| PS-Power Supply, 120-277VAC | 010V-0-10V Dimming (1%) | D-Dry       | 96-96 Watts | 24-24 VDC | ENL-0-10V Enlightened |

| Model  | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |

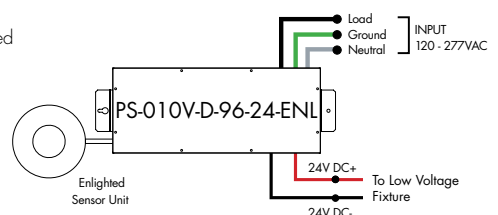


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code Non-Dimming Power Supply 120VAC - 277VAC


| MODEL                         | INPUT CONTROL    | ENVIRONMENT | WATTAGE     | OUTPUT      |
|-------------------------------|------------------|-------------|-------------|-------------|
| PS - Power Supply, 120-277VAC | ND - Non Dimming | D - Dry     | 96-96 Watts | 24 - 24 VDC |

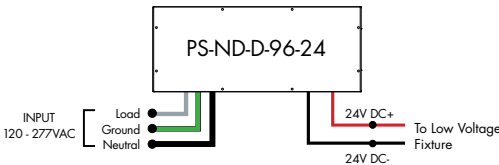

| MODELS | 96W    |
|--------|--------|
| Length | 14.40" |
| Width  | 5.20"  |
| Depth  | 2.60"  |

  
Luminii is a Lutron OEM Advantage Partner  
Lutron Power Supplies 1%


| MODEL                                               |
|-----------------------------------------------------|
| L3DA4U1UKL-CV240                                    |
| Hi-lume™ 1% EcoSystem Voltage LED driver<br>40W max |

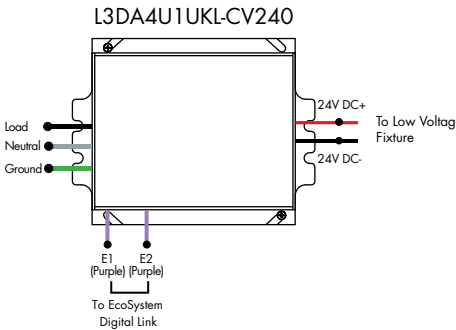

| MODELS | L3DA4U1UKL-CV240 |
|--------|------------------|
| Length | 4.98"            |
| Width  | 4.00"            |
| Depth  | 2.62"            |

  
Luminii is a Lutron OEM Advantage Partner  
Lutron Power Supplies 0.1%

| MODEL                                                                              |
|------------------------------------------------------------------------------------|
| L3D0-96W24V-U                                                                      |
| Hi-lume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™<br>96W max |

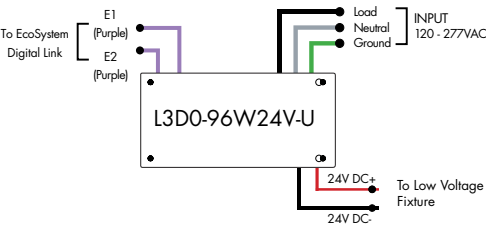

| MODELS | L3D0   |
|--------|--------|
| Length | 10.50" |
| Width  | 5.50"  |
| Depth  | 2.00"  |