


Features

- Full length seamless lenses range from 2 to 12 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- The Vesta Recessed line features a powerful light in a clean, recessed format while not sacrificing the symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

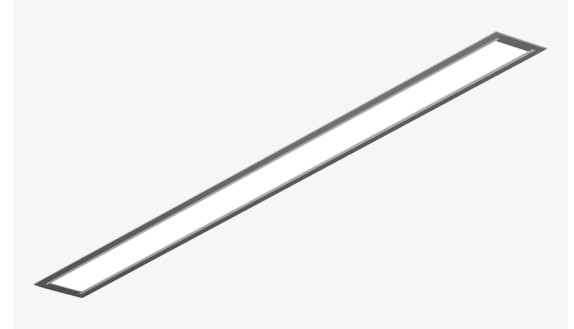

Finish Options

White
 Black
 Silver

Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	CRI	TM-30		
		R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSD-R-6ft-TW0427K65K-F-AF5-WH-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ²	CCT	LENS DOWN
VSD-R-Vesta Dry, Recessed	4ft-4 feet 6ft-6 feet 8ft-8 feet 10ft-10 feet 12ft-12 feet XX-System ⁶	TW04-418 lm/ft (4.8 W/ft) ¹ TW06-592 lm/ft (7.2 W/ft) TW08-776 lm/ft (9.6 W/ft)	27K65K-Tunable White, 2700K-6500K	F-Frosted Lens


MOUNTING	FINISH	DRIVER	DRIVER OPTIONS
GS-Gypsum Surface Mounting Bracket AF5-AC + Feed Cable, 5ft long AF8-AC + Feed Cable, 8ft long AF10-AC + Feed Cable, 10ft long	WH-White BK-Black SL-Silver	010S-0-10V, 1% Dimming, 120/277V DALI-EldotLED, DALI protocol 2, DF-6, Log, 0.1% Dimming, 120/277V DMX-EldotLED, DMX, 0.1% Dimming, 120V/277V	NA-None CSMB-Casambi ³ AWN-R-Athena ⁴ MNOD-PIR Motion Sensor, Occupancy, Daylight Harvesting ⁵

1 - TW04 Output is not available with 4ft length.
2 - Tunable White output numbers are at representative of 4000K
3 - CSMB with 010S/DALI drivers only.

4 - AWNR contact manufacturer for build assistance - (MOD Only).
5 - MNOD contact manufacturer for build assistance - (MOD Only).
6 - Customizable configurations available, contact factory (MOD only).

CONTACT FACTORY FOR MORE OPTIONS.


Dimensions

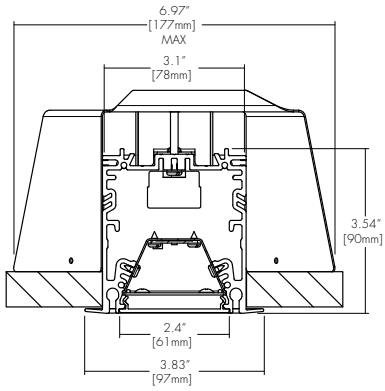

Lens

F

Frosted Lens



Cut Lengths


CODE	FIXTURE LENGTH *1	Feet	2	4	6	8	10	12
A	22.5"							
B (4)	44.5"							
C (6)	66.5"							
D (8)	88.5"							
E (10)	110.5"							
F (12)	132.5"							

Legend

- ▲ : Mounting Point
- F : Feed Point

Same for both ends for all configurations except A

L node dimensions

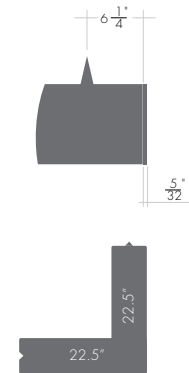

*1 Not including end-caps. End-caps are an additional 5/32"

*2 For custom lengths please customer service. Cover plates will be added to each end to avoid dark spaces on lense.

Standard Finish

BK
Black


WH
White

SL
Silver




TM-30

Tunable White 2700K



Tunable White 6500K



Photometry

Tunable White Down

