


## Features

- Full length seamless lenses range from 2 to 12 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- Features a symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty.



## Finish Options

- White 
  Black 
  Silver



## Technical Information

OUTPUT OPTIONS (Frosted Lens)	04	06	08	10	12
<b>Lumen Output</b>	400 lm/ft	566 lm/ft	843 lm/ft	1034 lm/ft	1220 lm/ft
<b>Average Power Consumption</b>	3.8 W/ft	5.7 W/ft	9.4 W/ft	12.0 W/ft	15.1 W/ft
<b>Efficacy</b>	104 lm/W	100 lm/W	90 lm/W	87 lm/W	81 lm/W

CCT	Multiplier	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
2700K	0.92	93+	92	100	50+
3000K	0.97	93+	92	103	50+
3500K	1.00	93+	93	102	50+
4000K	1.07	93+	92	101	50+

OUTPUT OPTIONS (Asymmetric Lens)	04	06	08
<b>Lumen Output</b>	433 lm/ft	648 lm/ft	800 lm/ft
<b>Average Power Consumption</b>	8.1 W/ft	13.8 W/ft	17.3 W/ft
<b>Efficacy</b>	54 lm/W	47 lm/W	46 lm/W

## Ordering Code

Integral Driver Example: Fixture VSD-SM-4FT-04-27K-F-CH-WH-0103-NA

### Fixture

MODEL	LENGTH	OUTPUT	CCT	LENS	MOUNTING	BODY FINISH
VSD-SM - Vesta Dry, Surface Mount	2ft - 2 feet 4ft - 4 feet 6ft - 6 feet 8ft - 8 feet 10ft - 10 feet 12ft - 12 feet XX - System <sup>12</sup>	04 - 400 lm/ft (3.8 W/ft) 06 - 566 lm/ft (5.7 W/ft) 08 - 843 lm/ft (9.4 W/ft) 10 - 1034 lm/ft (12 W/ft) 12 - 1220 lm/ft (15 W/ft)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	F - Frosted Lens AS - Asymmetric Lens <sup>1,2,3</sup> BL - Black Lens	SM - Surface Mount	Standard WH - White BK - Black SL - Silver

DRIVER	DRIVER OPTIONS
010S - 0-10V, 1% Dimming, 120V/277V 0103 - 0-10V, 1% Dimming, 347V Only <sup>4</sup> 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120V/277V <sup>5</sup> 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120V/277V <sup>5</sup> DALI - EldoLED, DALI protocol 2, DT-6, Log, 0.1% Dimming, 120V/277V <sup>5</sup> LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V <sup>6</sup> DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V <sup>5</sup>	NA - None EMG - Emergency Driver <sup>7,8</sup> CSMB - Casambi <sup>9</sup> AWN - Athena <sup>11</sup> MNOD - PIR Motion Sensor, Occupancy, Daylight Harvesting <sup>10</sup>


1 - Asymmetric lens not compatible with 2ft Length.  
 2 - Asymmetric lens is not compatible with 10 or 12 output.  
 3 - Asymmetric lens not compatible with 010L/010G/DALI/LUTE/DMX  
 4 - 0103 Driver (347V) not available with 2ft Length.  
 5 - Output 12 not available with Drivers 010L/010G/DALI/DMX.  
 6 - Output 08/10/12 not available for LUTE driver.

7 - EMG Battery Back-Up not available on Length 2ft, 4ft or 6ft, illuminates 4ft or 6ft section based on lumen output.  
 8 - EMG not available with 0103/LUTE/DMX drivers.  
 9 - CSMB with 010S/010L/010G/DALI drivers only.  
 10 - MNOD contact manufacturer for build assistance - (MOD Only).  
 11 - AWNR contact manufacturer for build assistance - (MOD Only).  
 12 - Customizable configurations available, contact factory (MOD only).


CONTACT FACTORY FOR MORE OPTIONS.

## Lens


**F**  
Frosted Lens








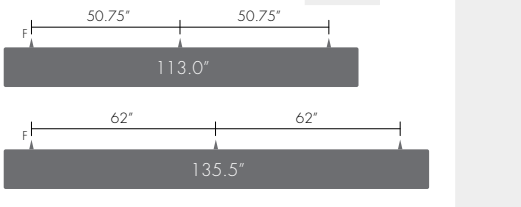
**AS**  
Asymmetric Lens



**BL**  
Black Lens




## Cut Lengths

CODE	FIXTURE LENGTH LONGUEUR *1	Feet	2	4	6	8	10	12	
A	22.5"								
B (4)	44.5"								
C (6)	66.5"								
D (8)	88.5"								
E (10)	110.5"								
F (12)	132.5"								

### Legend

- ▲ : Suspension Point
- F(|) : Feed Point
- D : Direct
- DI : Direct / Indirect
- SS : Separate Switching

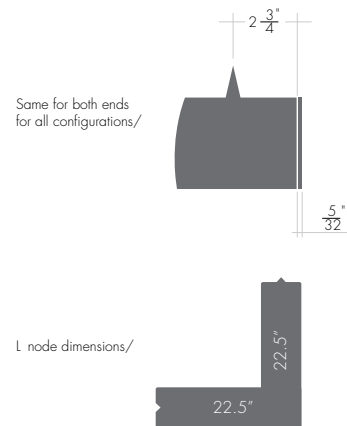

\*1 Not including end-caps. End-caps are an additional 5/32"


For custom lengths please call customer service. Cover plates will be added to each end to avoid dark spaces on lens.

Sensor adds 3.75" to standard vesta length

## Standard Finish

---


**BK**  
Black



**WH**  
White




**SL**  
Silver



## TM-30

### 2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

### 3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

### 3500K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

### 4000K



COLOR VECTOR GRAPHIC





— Reference Source — Test Source

## Photometry

### Static White Down Frosted Lens

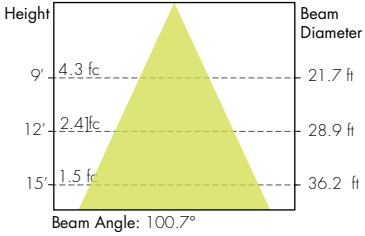

### Static White Down Asymmetric Lens

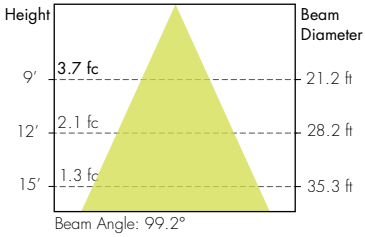

### Static White Black Lens

