

Features

- Full length seamless lenses range from 4 to 12 feet.
- This built to order, architecturally designed luminaire features Up AND Down light output.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- The subtle flared Vesta Suspended fixtures feature a symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty.

Finish Options



Technical Information

OUTPUT OPTIONS		TW04	TW06	TW08
DOWN	Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
	Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
	Efficacy	20 lm/W	21 lm/W	21 lm/W
UP	Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
	Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
	Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	TM-30			
	CRI	R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSD-S_UD-6FT-TW04-TW04-27K65K-F-F-WH-RDS-WH-AF5-CL-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ^{1,2}	OUTPUT UP ^{1,2}	CCT	LENS DOWN ¹	LENS UP ¹	FINISH
VSD-S - Vesta Dry, Suspended Up AND Down	4ft - 4 feet ³ 6ft - 6 feet 8ft - 8 feet 10ft - 10 feet 12ft - 12 feet XX - System ⁴	TW04 - 418 lm/ft (4.8 W/ft) ³ TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	TW04 - 418 lm/ft (4.8 W/ft) TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	27K65K - Tunable White, 2700K-6500K	F - Frosted Lens	F - Frosted Lens BW - Batwing	Standard WH - White BK - Black SL - Silver
CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE/HEIGHT	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS		
RDS - Round Slim USQS - Unified Square Slim URDS - Unified Round Slim	Standard WH - White BK - Black SL - Silver	AF5 AC + Feed Cable, 5ft long AF8 AC + Feed Cable, 8ft long AF10 AC + Feed Cable, 10ft long	Standard CL - Feed Cable Clear WH - Feed Cable White BK - Feed Cable Black	010S - 0-10V, 1% Dimming, 120/277V	NA - None CSMB - Casambi		


1 - Must select OUTPUT and LENS for both DOWN and UP.
2 - Tunable White output numbers are at representative of 4000K.

3 - TW04 Output is not available with 4ft Length.
4 - Customizable configurations available, contact factory (MOD only).


CONTACT FACTORY FOR MORE OPTIONS.

Canopy


RDS
Round Slim Canopy

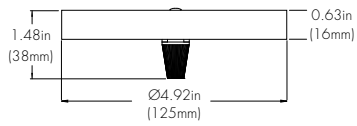

URDS
Unified Round Slim

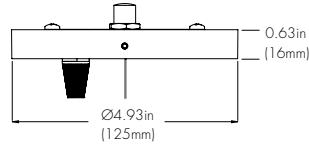

USQS
Unified Square Slim

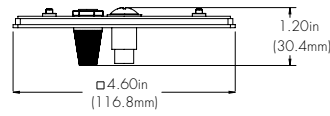


Lens Down

F
Frosted Lens




Lens Up

F
Frosted Lens



BW
Batwing Lens (Only Lens Up)




Cut Lengths

CODE	FIXTURE LENGTH LONGUEUR	Feet	2	4	6	8	10	12
A	22.5"	F(D,DI,SS) F(SS) 17.5"		22.5"				
B (4)	44.5"	F(D,DI,SS) 39.0" F(SS)		44.5"				
C (6)	66.5"	F(D,DI,SS) 61.0" F(SS)		66.5"				
D (8)	88.5"	F(D,DI,SS) 83.0" F(SS)		88.5"				
E (10)	110.5"	F(D,DI,SS) 52.5" F(SS)		110.5"				
F (12)	132.5"	F(D,DI,SS) 63.5" F(SS)		132.5"				

Legend

- ▲ : Suspension Point
- F(): Feed Point
- D : Direct
- DI : Direct / Indirect
- SS : Separate Switching

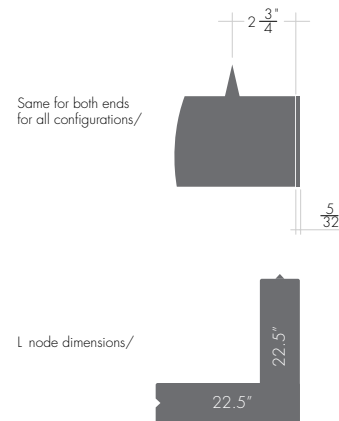

*1 Not including end-caps. End-caps are an additional 5/32"

For custom lengths please call customer service. Cover plates will be added to each end to avoid dark spaces on lense.



Sensor adds 3.75" to standard vesta length

Standard Finish

BK
Black

WH
White


SL
Silver



TM-30

Tunable White 2700K


COLOR VECTOR GRAPHIC



—Reference Source —Test Source

Tunable White 6500K

COLOR VECTOR GRAPHIC



—Reference Source —Test Source

Photometry

Tunable White Down

