


Features

- Full length seamless lenses range from 2 to 12 feet.
- Integrated drivers and controls make this fixture easy to install and widely applicable
- Designed to work with 9/16" or 15/16" T-Grid ceiling applications
- The Vesta Recessed line features a powerful light in a clean, recessed format while not sacrificing the symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

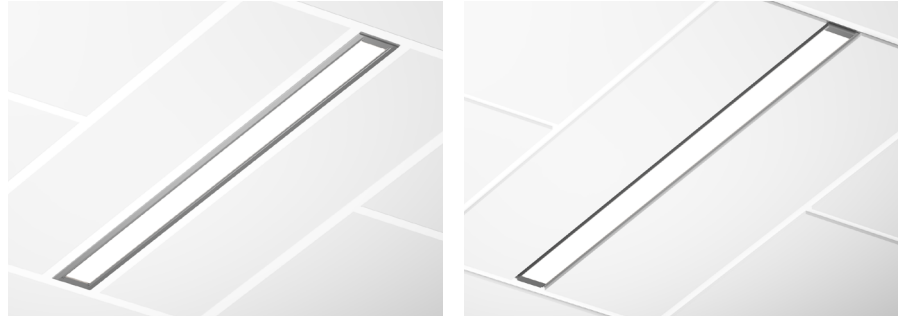

Finish Options

White
 Black
 Silver



Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	TM-30			
	CRI	R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSD-TG-6ft-TW04-TW04-F-TB9-WH-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ¹	CCT	LENS DOWN
VSD-TG - Vesta Dry, T-Grid ³ VSD-TT - 2-models TT-9, 15 separated ⁴	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet 10ft - 10 feet 12ft - 12 feet XX - System ^{1,3}	TW04 - 418 lm/ft (4.8 W/ft) ² TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	TW04 - 418 lm/ft (4.8 W/ft) TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	F - Frosted Lens




MOUNTING	FINISH	DRIVER	DRIVER OPTIONS ⁶
TB9 - 9/16" Lay-in Grid ³ TB15 - 15/16" Lay-in Grid ³ TT9 - 9/16" Tegular Clip ⁴ TT15 - 15/16" Tegular Clip ⁴ TD9 - 9/16" Drop-in Grid ³ TD15 - 15/16" Drop-in Grid ³	WH - White BK - Black SL - Silver	010S - 0-10V, 1% Dimming, 120/277V DALI - EidoLED, DALI protocol 2, DF-6, Log, 0.1% Dimming, 120/277V DMX - EidoLED, DMX, 0.1% Dimming, 120V/277V	NA - None CSMB - Casambi ⁵

1 - Tunable White output numbers are at representative of 4000K
 2 - TW04 Output is not available with 4ft Length.
 3 - VSD-TG must use TB or TD Mounting.

4 - VSD-TT must use TT Mounting.
 5 - CSMB is only available with 010S/DALI drivers only.
 6 - AWNR - Contact Manufacture for Build Assistance - (MOD Only).
 7 - Customizable configurations available, contact factory (MOD only).


CONTACT FACTORY FOR MORE OPTIONS.

Dimensions

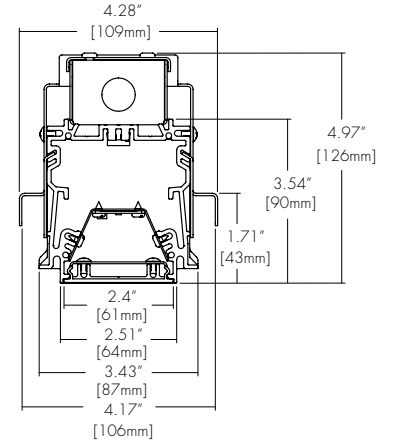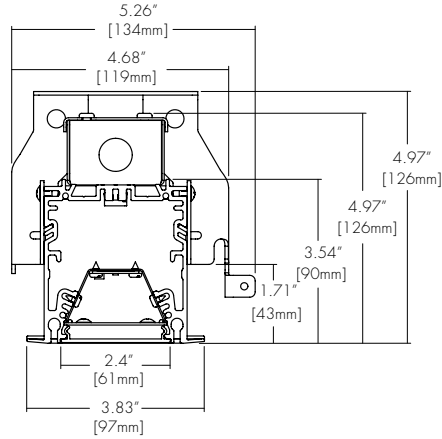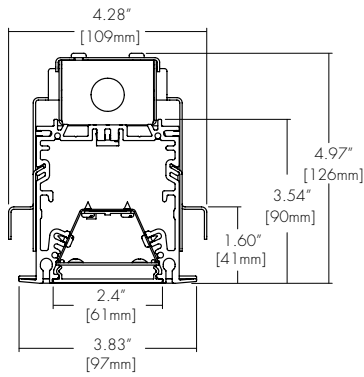


Mounting

TB9/TB15 Lay-in Grid

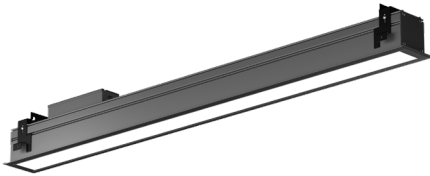

TD9/TD15 Drop-in Grid

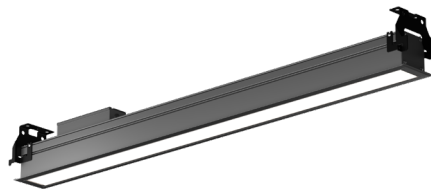


TT9/TT15 Tegular Clip




Lens

F Frosted Lens



Compatible with 9/16" - 15/16" grid




Standard Finish


BK
Black



WH
White




SL
Silver




TM-30

Tunable White 2700K



—Reference Source —Test Source

Tunable White 6500K



—Reference Source —Test Source

Photometry

Tunable White Down

