


Features

- Full length seamless lenses range from 4 to 8 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- The Vesta Recessed line features a powerful light in a clean, recessed format while not sacrificing the symmetrical, high-performance WET RATED frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty.

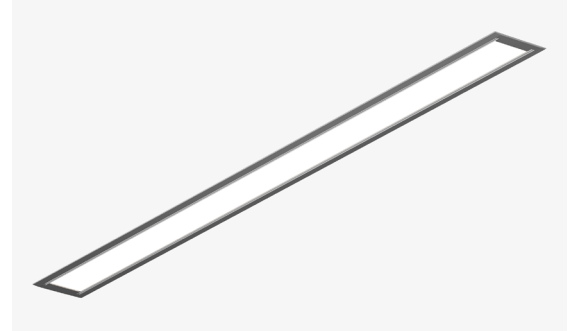

Finish Options

White Black Silver



ROHS



Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	CRI	TM-30		
		R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSD-R-6ft-TW04-27K65K-F-GS-WH-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ²	CCT	LENS DOWN
VSD-R - Vesta Dry, Recessed	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet XX - System ⁵	TW04 - 418 lm/ft [4.8 W/ft] ¹ TW06 - 592 lm/ft [7.2 W/ft] TW08 - 776 lm/ft [9.6 W/ft]	27K65K - Tunable White, 2700K-6500K	F - Frosted Lens
MOUNTING	FINISH	DRIVER		DRIVER OPTIONS
GS - Gypsum Surface Mounting Bracket	WH - White BK - Black SL - Silver	010S - 0-10V, 1% Dimming, 120/277V DALI - EdoLED, DALI protocol 2, DT-6, Log, 0.1% Dimming, 120/277V DMX - EdoLED, DMX, 0.1% Dimming, 120V/277V		NA - None CSMB - Casambi ³ AWN-R - Athena ⁴

1 - TW04 Output is not available with 4ft length.
2 - Tunable White output numbers are at representative of 4000K.


3 - CSMB with 010S/DALI drivers only.
4 - AWNR - Contact manufacture for build assistance - (MOD Only).
5 - Customizable configurations available, contact factory (MOD only).

CONTACT FACTORY FOR MORE OPTIONS.

VESTA WET

RECESSED
TUNABLE WHITE LINEAR SYSTEM


Dimensions

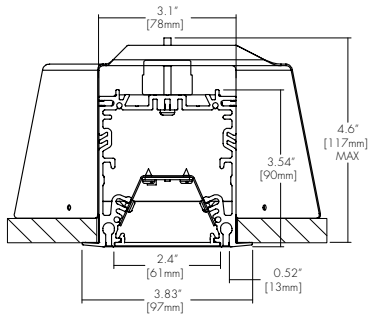

Lens

F







Frosted Lens



VESTA WET

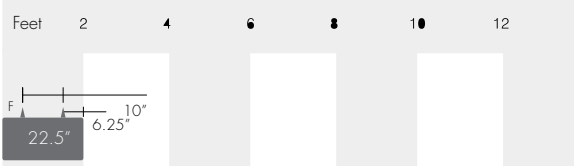RECESSED
TUNABLE WHITE LINEAR SYSTEM

Cut Lengths


CODE	FIXTURE LENGTH *1	Feet	2	4	6	8	10	12
A	22.5"							
B (4)	44.5"							
C (6)	66.5"							
D (8)	88.5"							
E (10)	110.5"							
F (12)	132.5"							

Legend

▲ : Mounting Point
F : Feed Point

Same for both ends for all configurations except A

L node dimensions

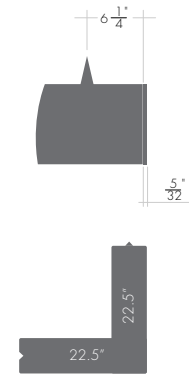

*1 Not including end-caps. End-caps are an additional 5/32"



*2 For custom lengths please customer service. Cover plates will be added to each end to avoid dark spaces on lense.

Standard Finish

BK
Black

WH
White


SL
Silver

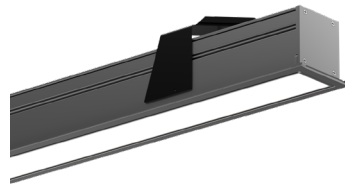

TM-30

Tunable White 2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 6500K

COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Photometry

Tunable White Down

