


# VESTA WET

## SUSPENDED LINEAR SYSTEM



### Features

- Full length seamless lenses range from 4 to 8 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable
- The subtle flared Vesta Suspended fixtures feature a symmetrical, high-performance VVET RATED frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

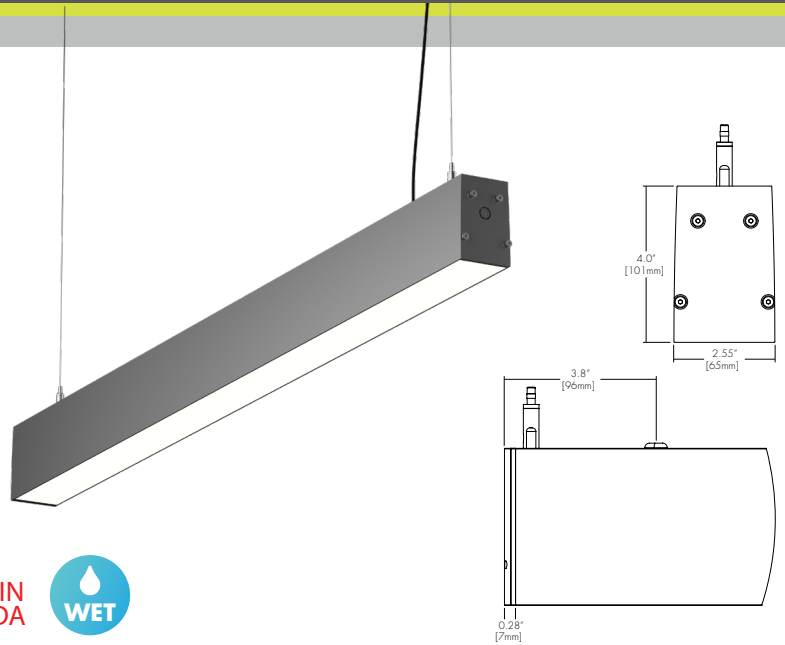

### Finish Options

- White
  Black
  Silver



### Technical Information

OUTPUT OPTIONS (Frosted Lens)	04	06	08	10
<b>Lumen Output</b>	400 lm/ft	566 lm/ft	843 lm/ft	1034 lm/ft
<b>Average Power Consumption</b>	3.8 W/ft	5.7 W/ft	9.4 W/ft	12.0 W/ft
<b>Efficacy</b>	104 lm/W	100 lm/W	90 lm/W	87 lm/W

CCT	Multiplier	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
2700K	0.92	93+	92	100	50+
3000K	0.97	93+	92	103	50+
3500K	1.00	93+	93	102	50+
4000K	1.07	93+	92	101	50+

OUTPUT OPTIONS (Asymmetric Lens)	04	06	08
<b>Lumen Output</b>	433 lm/ft	648 lm/ft	800 lm/ft
<b>Average Power Consumption</b>	8.1 W/ft	13.8 W/ft	17.3 W/ft
<b>Efficacy</b>	54 lm/W	47 lm/W	46 lm/W

### Ordering Code

Integral Driver Example: Fixture VSW-S-6ft-06-35K-F-N-WH-NA-NA-AF5-WH-010S-NA

Fixture					
MODEL	LENGTH	OUTPUT DOWN	CCT	LENS DOWN	FINISH
VSW-S - Vesta Wet, Suspended	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet XX - System <sup>6</sup>	04 - 400 lm/ft (3.8 W/ft) 06 - 566 lm/ft (5.7 W/ft) 08 - 843 lm/ft (9.4 W/ft) 10 - 1034 lm/ft (12 W/ft)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	F - Frosted Lens AS - Asymmetric Lens <sup>1</sup>	Standard WH - White BK - Black SL - Silver
CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE/HEIGHT	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
NA - None	NA - None	AF5 AC + Feed Cable, 5ft long AF8 AC + Feed Cable, 8ft long AF10 AC + Feed Cable, 10ft long	WH - Feed Cable White BK - Feed Cable Black	010S-010V, 1% Dimming, 120V/277V <sup>3</sup> 0103-010V, 1% Dimming, 347V Only <sup>4</sup> 010L-EldoLED, 010V, linear, 0.1% Dimming, 120/277V <sup>2,3</sup> 010G-EldoLED, 010V, log, 0.1% Dimming, 120/277V <sup>2,3</sup> DALI-EldoLED, DALI protocol 2, DT-6, Log, 0.1% Dimming, 120/277V <sup>2,3</sup> LUTE-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V <sup>2,4</sup> DMX-EldoLED, DMX, 0.1% Dimming, 120V/277V <sup>2,4</sup>	NA - None EMG - Emergency Driver <sup>5</sup> CSMB - Casambi

1 - Asymmetric Lens not compatible with Output 10.  
2 - Asymmetric Lens not compatible with 010L/010G/DALI/LUTE/DMX.  
3 - CSMB with 010S/010L/010G/DALI drivers only.



4 - EMG not available with 0103/LUTE/DMX drivers.  
5 - EMG Battery Back-Up not available on Length 4ft or 6ft, illuminates 4ft or 6ft section based on lumen output.  
6 - Customizable configurations available, contact factory (MOD only).

CONTACT FACTORY FOR MORE OPTIONS.

## Lens

**F**  
Frosted Lens

**AS**  
Asymmetric Lens



## Cut Lengths

Vesta Wet Rated Suspended end cap will add 0.55" (14mm),  
0.28" (7mm) per side to the total length.




CODE	FIXTURE LENGTH LONGUEUR	*1	Feet	4	6	8	10
A	45.5"						
B (6)	68"						
C (8)	90.5"						

## Standard Finish

**BK**  
Black

**WH**  
White


**SL**  
Silver



## TM-30

### 2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

### 3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

### 3500K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

### 4000K



COLOR VECTOR GRAPHIC



— Reference Source — Test Source

## Photometry

### Frosted Lens

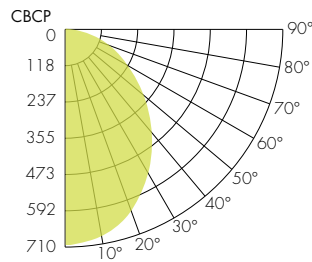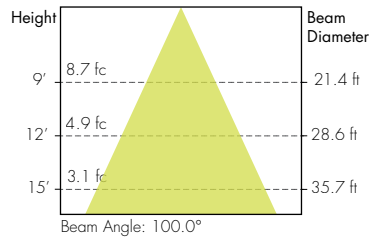

### Asymmetric Lens

