


Features

- Full length seamless lenses range from 4 to 8 feet.
- This built to order, architecturally designed luminaire features Up AND Down light output
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable
- The subtle flared Vesta Suspended fixtures feature a symmetrical, high-performance WET RATED frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

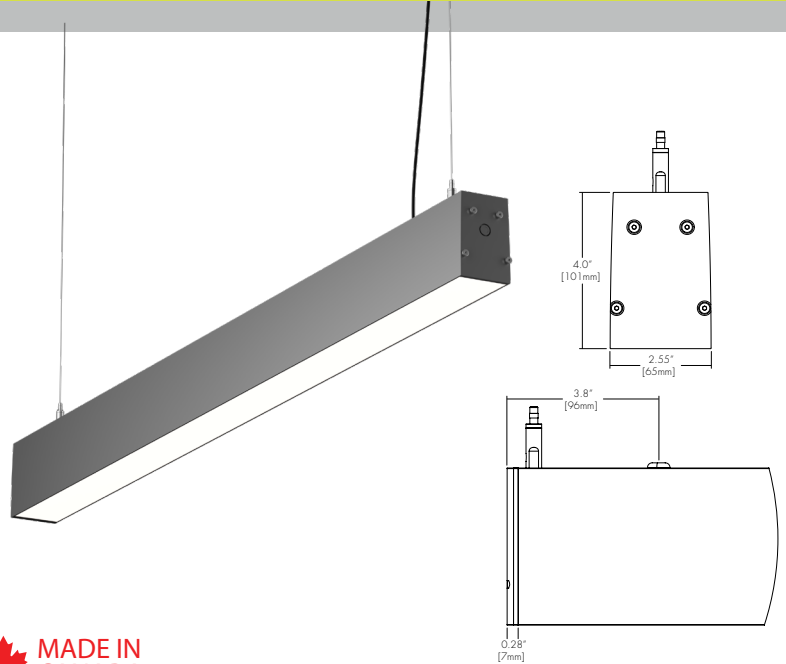

Finish Options

White Black Silver



Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	CRI	TM-30		
		R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSW-S-6ft-TW06-27K65K-F-00-WH-NA-NA-AF5-WH-010S-CSMB

Fixture					
MODEL	LENGTH	OUTPUT DOWN ¹	CCT	LENS DOWN	FINISH
VSW-S - Vesta Wet, Suspended	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet XX - System ⁴	TW04 - 418 lm/ft (4.8 W/ft) ² TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	27K65K - Tunable White, 2700K-6500K	F - Frosted Lens	Standard WH - White BK - Black SL - Silver
CANOPY/ HOUSING CANOPY FINISH SUSPENSION TYPE/HEIGHT SUSPENSION FINISH DRIVER DRIVER OPTIONS					
NA - None	NA - None	AF5 AC + Feed Cable, 5ft long AF8 AC + Feed Cable, 8ft long AF10 AC + Feed Cable, 10ft long	WH - Feed Cable White BK - Feed Cable Black	010S - 0-10V, 1% Dimming, 120/277V DALI - EldoLED, DALI protocol 2, DF-6, Log, 0.1% Dimming, 120/277V DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V	NA - None CSMB - Casambi ³

1 - Tunable White output numbers are at representative of 4000K.
2 - TW04 Output is not available with 4ft length.

3 - CSMB is only available with 010S/DALI drivers.
4 - Customizable configurations available, contact factory (MOD only).

CONTACT FACTORY FOR MORE OPTIONS.

VESTA WET



SUSPENDED
TUNABLE WHITE LINEAR SYSTEM



Lens

F
Frosted Lens

AS
Asymmetric Lens



Cut Lengths

Vesta Wet Rated Suspended end cap will add 0.55" (14mm),
0.28" (7mm) per side to the total length.




CODE	FIXTURE LENGTH LONGUEUR	Feet	4	6	8	10
A	45.5"					
B (6)	68"					
C (8)	90.5"					

Standard Finish

BK
Black


WH
White

SL
Silver




TM-30

Tunable White 2700K



Tunable White 6500K

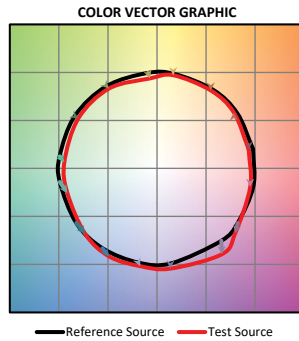

Photometry

Tunable White Down

