


# PRISCILLA

ULTRA LOW PROJECTION LED SURFACE MOUNTED LUMINAIRE  
FOR BEHAVIORAL HEALTH APPLICATIONS

alva  
by luminii



Priscilla 19 with Island Breeze (IB) resin shade, ESN trim

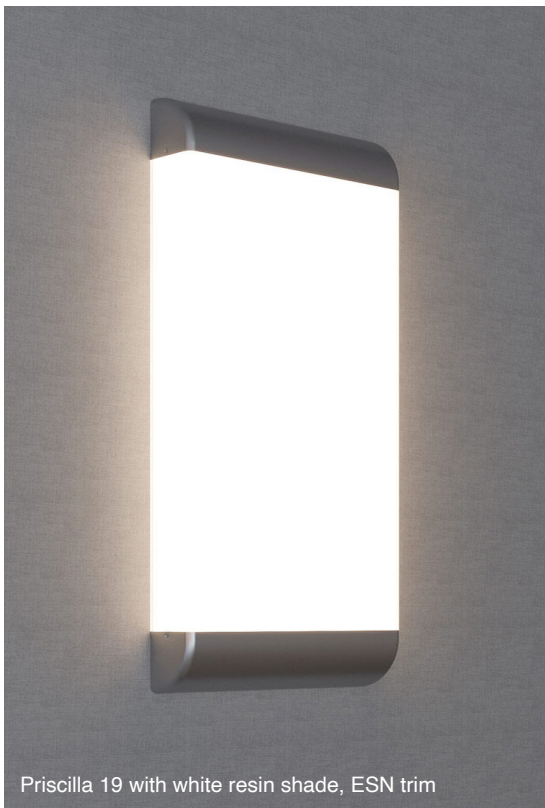

Priscilla 19 with white resin shade, ESN trim



SCAN TO TO  
LEARN MORE

|                       |  |
|-----------------------|--|
| <b>APPLICATIONS</b>   | <ul style="list-style-type: none"><li>Behavioral Health, Healthcare, Anti-Ligature Applications, Corporate, Retail, Hospitality</li></ul>  |
| <b>SIZES</b>          | <ul style="list-style-type: none"><li>19" L x 8.5" W x 1.75" D, 5 lbs (approved by Behavior Health)</li><li>35" L x 8.5" W x 1.75" D, 10 lbs</li></ul>   |
| <b>WEIGHT</b>         | <ul style="list-style-type: none"><li>Priscilla-19, 5.1 pounds</li><li>Priscilla-35, 10.2 pounds</li></ul>   |
| <b>MOUNTING</b>       | <ul style="list-style-type: none"><li>J-Box 3.0 or 4.0 at center or end of fixture</li><li>Can be mounted horizontally or vertically</li></ul>   |
| <b>DIMMING</b>        | <ul style="list-style-type: none"><li>0-10V Dimming (100-10%)</li></ul>  |
| <b>SPECIFICATIONS</b> | <ul style="list-style-type: none"><li>High efficiency, fully integrated proprietary LED Module</li><li>IK10 UL Certified (protected against 20 joules of impact)</li><li>Title 24 JA8 Certified</li><li>ADA Compliant</li><li>Color Temperature Select (CCT), Integrated four CCT select (2700K, 3000K, 3500K, 4000K). OPTIONAL (specify)</li><li>1.75" projection</li><li>ETL Dry Listed</li><li>120-277V Input</li><li>L90 - 100,000+ hours. 10 years / 24/7</li><li>Optional tamper resistant mounting screws</li></ul> |
| <b>LAMPING</b>        | <ul style="list-style-type: none"><li>2700K, 3000K, 3500K, 4000K CCT</li><li>90 CRI (minimum)</li><li>75W+ equivalent, 19" - 15W</li><li>150W+ equivalent, 35" - 29W</li><li>19" - 525+ lumens delivered with pattern resin shade.<br/>700+ lumens delivered with white resin shade</li><li>35" - 1050+ lumens delivered with pattern resin shade.<br/>1400+ lumens delivered with white resin shade</li></ul>   |
| <b>CONSTRUCTION</b>   | <ul style="list-style-type: none"><li>Shade: Durable ARCHITECTURAL RESIN by ALVA</li><li>Trim: Architectural grade metal finish. Optional Antimicrobial Finish (must specify)</li></ul>  |

SPECIFICATIONS SUBJECT TO CHANGE 06/2026


# PRISCILLA

ULTRA LOW PROJECTION LED SURFACE MOUNTED LUMINAIRE  
FOR BEHAVIORAL HEALTH APPLICATIONS

alva  
by luminii

## CCTSELECT

CCTSELECT control panel on the end cap of ALVA luminaires:



### Setting CCTSELECT Levels

ALVA luminaires come set at your call out in your order. If CCT is not indicated, your module will be set at 3000K by default.



### Remote Dimming Option, 0 - 10V (100 - 10%)

0-10V dimming may be used with compatible dimmer controls



Priscilla 35 with Island Breeze shade, EOB trim



SCAN TO TO  
LEARN MORE


# PRISCILLA

ULTRA LOW PROJECTION LED SURFACE MOUNTED LUMINAIRE  
FOR BEHAVIORAL HEALTH APPLICATIONS

alva  
by luminii


|                   |
|-------------------|
| <b>PROJECT:</b>   |
| <b>SPEC TYPE:</b> |
| <b>NOTES:</b>     |

## Resin Shade

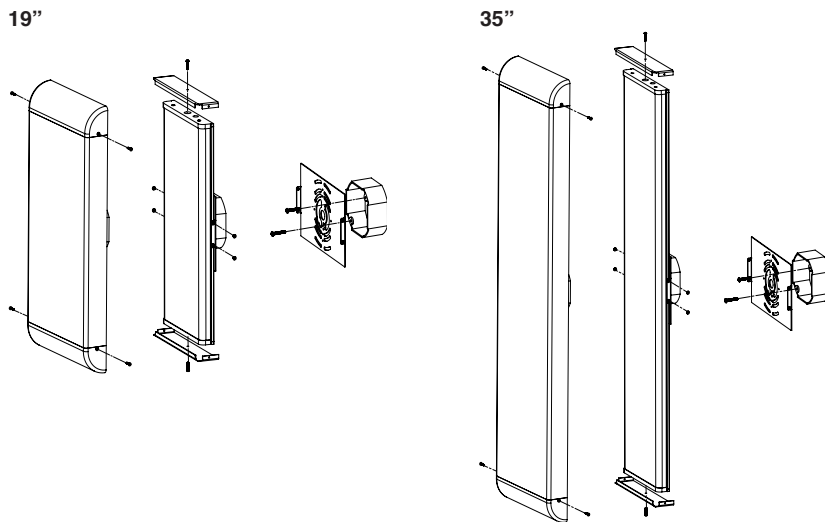

Before installing this light fixture, Please Be Aware of the Following Disclaimers: Installation of these or any other products will NOT eliminate all risks of suicide or injury. ALVA LIGHT does not guarantee or assume any responsibility whatsoever for the performance of any product.

## Metal Trim Powder Coat Trim Options

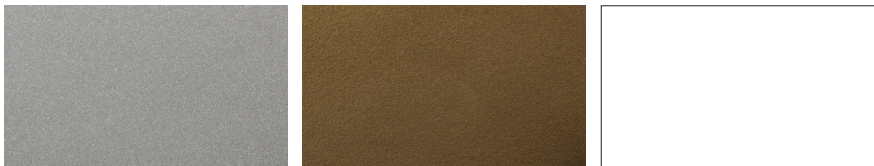


Enviro Satin Nickel, **ESN**

Enviro Oil-Rubbed Bronze, **EOB**

White, **WHT**

## Vandal Resistant, Architectural Resin Shade Options

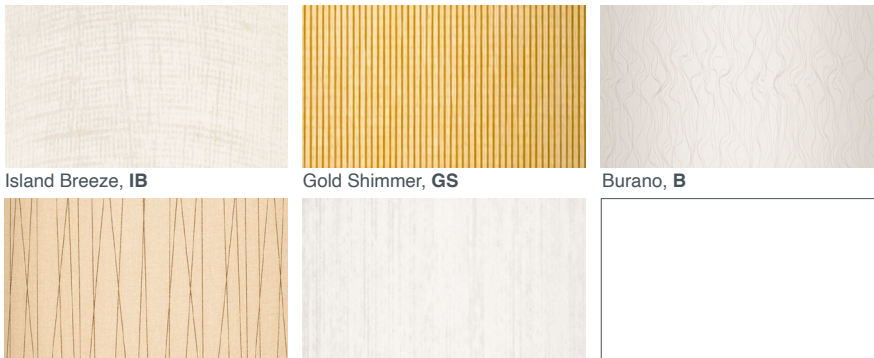

Island Breeze, **IB**

Gold Shimmer, **GS**

Burano, **B**

Faux Alabaster, **FA**

Autumn, **A**

Linear Cross, **LC**

Rain **R**

White Resin, **W**

## ORDER CODE

**MODEL** PRISCILLA

Priscilla

### LENGTH

19 19"

35 35"

### SHADE MATERIAL

R Resin

R

### SHADE PATTERN

B Burano

GS Gold Shimmer

IB Island Breeze

A Autumn

LC Linear Cross

R Rain

FA Faux Alabaster

W White Resin

### METAL TRIM POWDER COAT FINISH OPTIONS

ESN Enviro Satin Nickel

EOB Enviro Oil-Rubbed Bronze

WHT White

### CCT

2700 2700K

3000 3000K

3500 3500K

4000 4000K

CS CCT Select

### ANTIMICROBIAL FINISH

AM Antimicrobial Finish

### MOUNTING

TX Tamper Resistant Mounting Screws

### BEHAVIORAL HEALTH

BH Behavioral Health (19" only)