BLC - Installation Instructions

Models BLC-XX

Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN. 5. SURFACE MOUNT ONLY
- 2. USE ONLY WITH CLASS 2 POWER UNIT. 6. SUITABLE FOR INSTAL
- 3. 24 VOLTS DC.
- 4. SUITABLE FOR DAMP LOCATIONS.




by lumin 7777 Merrimac Ave Niles, IL 60714 T 224.333.6033

7/7/ Merrimac Av Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com


. 5. SURFACE MOUNT ONLY REVO. 2
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE. 04102025
7. INHERENTLY PROTECTED

1/2

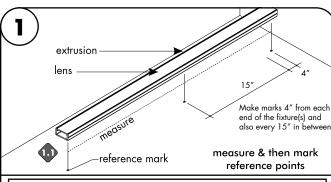


Note: Complete fixture must be built prior to installing. To make all necessary reference marks & to also ensure all parts are included. Then it can be taken apart for installation.

1.1 Snap lens into the extrusion, then align & center the extrusion to the determined location. Make all necessary markings to install to the surface. Prior to installation of extrusion, 24VDC power must be present.

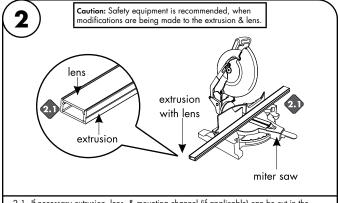


If necessary extrusion, lens, & mounting channel (if applicable) can be cut in the field. Snap all parts together then using the proper blade for aluminum cut to the desired length.

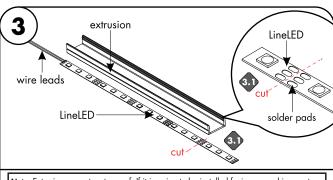



Note: Extrusion are not waterproof. If it is going to be installed facing up and in a wet location, drainage holes should be drilled along the inner corner of the extrusion every 12". Drill 1/16" to 1/8" diameters holes before installing LED strip

3.1 LineLED can be shortened by cutting along the dashed lines in between the solder pads. Make sure the cut is made on the side of the LineLED without the wire leads. LineLED cannot touch the metal endcap which will shorten the circuit.

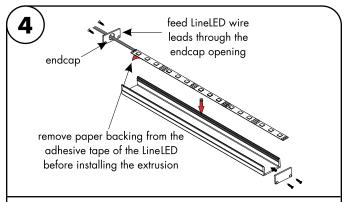

4.1 Prior to installing LineLED to extrusion, clean extrusion from any debris. Gently push LineLED onto aluminum extrusion. Then install endcaps at each ends of the extrusion.

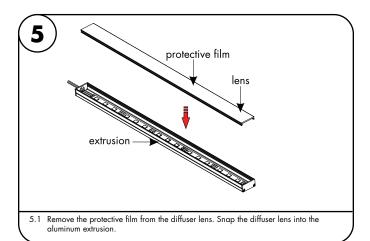

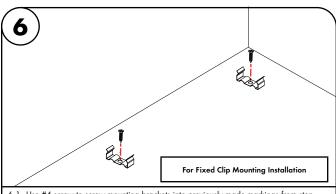

5.1 Use #4 screw to screw mounting brackets into previously made markings from step 1, then clip the extrusion on to the mounting brackets. Mounting bracket should be installed every 15"

BLC - Installation Instructions

Models BLC-XX

Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN. 5. SURFACE MOUNT ONLY
- 2. USE ONLY WITH CLASS 2 POWER UNIT. 6. SUITABLE FOR INSTALLATION WITHIN

7. INHERENTLY PROTECTED

- 3. 24 VOLTS DC.
- 4. SUITABLE FOR DAMP LOCATIONS.



Bbasics by lumini

> 7777 Merrimac Ave Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com

. 5. SURFACE MOUNT ONLY
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE.

REVO.2

04102025

2/2

