
BMC - Installation Instructions


Models BMC-XX


Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN. 5. SURFACE MOUNT ONLY


- 2. USE ONLY WITH CLASS 2 POWER UNIT.
- 3. 24 VOLTS DC.
- 4. SUITABLE FOR DAMP LOCATIONS.
- 7. INHERENTLY PROTECTED
- . SUITABLE FOR DAMP LOCATIONS.
- 6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE.
 - IABLE FOR INSTALLATION VITHIN THE CLOSET STORAGE SPAT
- extrusion lens 4″ 1.5 Make marks 4" from each medsure end of the fixture(s) and also every 15" in between measure & then mark reference mark reference points Note: Complete fixture must be built prior to installing. To make all necessary reference marks & to also ensure all parts are included. Then it can be taken apart for installation. Snap lens into the extrusion, then align & center the extrusion to the determined 1.1 location. Make all necessary markings to install to the surface. Prior to installation of extrusion, 24VDC power must be present.

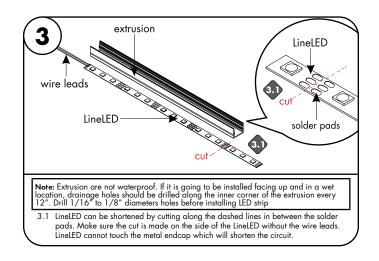

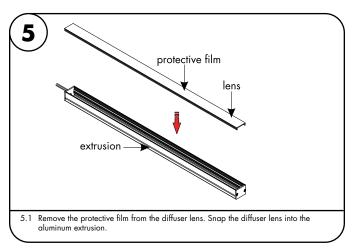

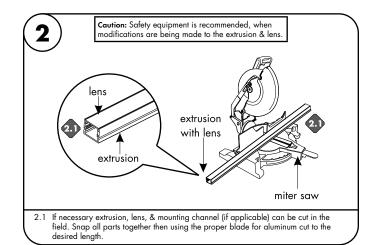

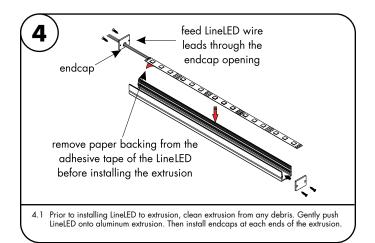

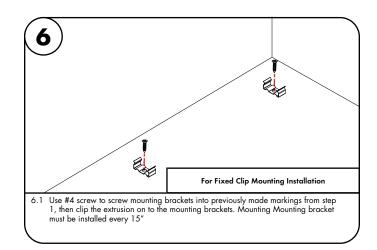

1/2

7777 Merrimac Ave Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com

BMC - Installation Instructions

Models BMC-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN. 5. SURFACE MOUNT ONLY

- 2. USE ONLY WITH CLASS 2 POWER UNIT.
- 3. 24 VOLTS DC.
- 4. SUITABLE FOR DAMP LOCATIONS.
- 6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE.
- 7. INHERENTLY PROTECTED

LISTED REVO.2 04102025

2/2

US

7777 Merrimac Ave Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com

