



Features

Basics Contractor-Grade recessed extrusions compatible with Basics LED strips.

Finish

Silver anodized Channel

Diffuser Lens

Polycarbonate, snap-in-place, UV resistant





Mounting

Multiple mounting clip options ordered separately

Warranty

5 Years

Product Dimensions

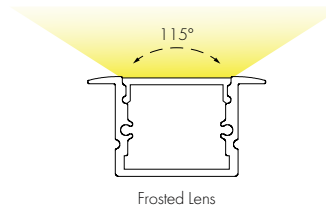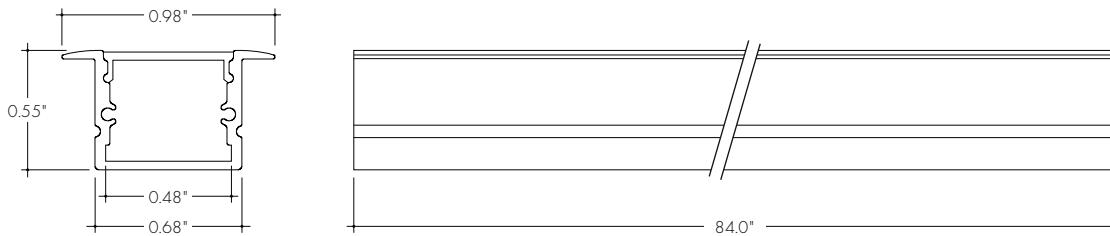

INCLUDED MOUNTING ACCESSORIES

| EXTRUSION LENGTH | MOUNTING SCREWS | END CAP (PAIR) |
|------------------|-----------------|----------------|
| 84" | 6 | 1 |

Each pair of endcaps includes 1x H0 (no wire feed hole) and 1x H1 (with hole) where applicable. Additional endcaps and mounting clips are available for purchase.

TRANSMISSION PERCENTAGE
(COMPARED TO LED TAPE WITHOUT CHANNEL)

| LENS | TRANSMISSION % |
|--------------|----------------|
| Clear | 65% |
| Half Frosted | 58% |
| Frosted | 44% |

See LED tape spec sheet for lens dotting characteristics & compatibility

Ordering code

| MODEL | LENGTH | LENS | MOUNTING ² | FINISH |
|--|----------|---|------------------------------------|----------------------|
| BRC - Basics Recessed Channel ¹ | 84 - 84" | C - Clear HF - Half Frosted F - Frosted | DS - Direct to Surface Screw Mount | SA - Silver Anodized |


¹ - End Caps are included with channel, one of H0 (no hole) and one of H1 (with hole). Order additional End Caps as necessary.
² - Mount Basics Recessed Channel directly to stud using flat head screws (by others), every 16 inches.

Accessories

All Channels come with a specified set of Mounting Clips and End Caps, see Ordering Code for details. Order additional Mounting Clips and End Caps as necessary.

EC-BRC-H0-SA

Silver Anodized End Cap

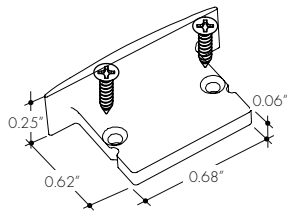

EC-BRC-H1-SA

Silver Anodized End Cap with powerfeed opening

