## **BSC** - Installation Instructions

### Models BSC-XX

### Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN. 5. SURFACE MOUNT ONLY
- 2. USE ONLY WITH CLASS 2 POWER UNIT.
- 3. 24 VOLTS DC.
- 4. SUITABLE FOR DAMP LOCATIONS.
- - 6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE.


7. INHERENTLY PROTECTED

REVO.2 04102025

1/2





7777 Merrimac Ave Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com



Note: Complete fixture must be built prior to installing. To make all necessary reference marks & to also ensure all parts are included. Then it can be taken apart for installation.


Snap lens into the extrusion, then align & center the extrusion to the determined location. Make all necessary markings to install to the surface. Prior to installation of extrusion, 24VDC power must be present.

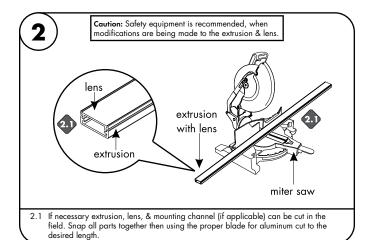





Note: Extrusion are not waterproof. If it is going to be installed facing up and in a wet location, drainage holes should be drilled along the inner corner of the extrusion every 12". Drill 1/16" to 1/8" diameters holes before installing LED strip

3.1 LineLED can be shortened by cutting along the dashed lines in between the solder pads. Make sure the cut is made on the side of the LineLED without the wire leads. LineLED cannot touch the metal endcap which will shorten the circuit.



Prior to installing LineLED to extrusion, clean extrusion from any debris. Gently push LineLED onto aluminum extrusion. Then install endcaps at each ends of the extrusion

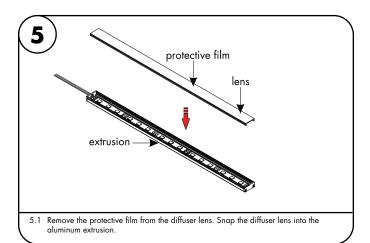



Use #4 screw to screw mounting brackets into previously made markings from step 1, then clip the extrusion on to the mounting brackets. Mounting Mounting bracket must be installed every  $15^{\prime\prime}$ 

# **BSC** - Installation Instructions

### Models BSC-XX

## Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN. 5. SURFACE MOUNT ONLY

7. INHERENTLY PROTECTED

- 2. USE ONLY WITH CLASS 2 POWER UNIT.

  6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE.
- 3. 24 VOLTS DC.
- 4. SUITABLE FOR DAMP LOCATIONS.



7777 Merrimac Ave Niles, IL 60714 T 224.333.6033

/// Merrimac Av Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com

REVO.2 04102025

2/2

